

SK0200900 'Mallard' 8-in-1 Antenna Black
incl. 5m Coax Cables - TETRA



The ‘Mallard’ is a low-profile, multifunction antenna designed to **future-proof** blue-light and amber-light vehicle fleets, delivering **up to 9 functions** within a single, panel-mounted unit. This variant features **8 functions**.

With market leading isolation to **support ESN**, as well as your current **TETRA radio**, there is no need to drill multiple holes into your vehicle’s roof due to **additional fitting kit options**.

The ‘Mallard’ supports **2x2 MiMo from 698MHz to 6GHz** with a minimum **4dBi gain** across the whole band. With the additional functionality of **4x4 MiMo 2.4/5.8GHz Wi-Fi function**, **2x GPS/GNSS Ports**, and **TETRA**, this antenna would be an ideal solution for future proofing your new vehicle installations for **ESN**.

With a single hole installation and a **wide frequency bandwidth** on offer, this antenna would help **reduce installation costs** and protect your vehicles resale value. For **other available cable options**, please contact us.

Also Available in White: Part No. SK0200910



Part No.	Cable Kit Options
SK0200106	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 6m Low Loss Coax Cables SMA five port Router & Airwave Radio
SK0200105	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 5m Low Loss Coax Cables SMA five port Router & Airwave Radio
SK0200103	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 3m Low Loss Coax Cables SMA five port Router & Airwave Radio

Additional options available upon request.

SK0200900 'Mallard' 8-in-1 Antenna Black incl. 5m Coax Cables - TETRA



Technical Specifications

Part No.	SK0200900		
Electrical Data	TETRA	2G 3G 4G 5G	Wi-Fi
Frequency Range (MHz)	380 - 430 MHz	698-6000 MHz	2.4 GHz & 5.8GHz
Band	TETRA	2x2 MiMo 2G 3G 4G 5G	3x3 MiMo Dual Band Wi-Fi
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi	Minimum 4dBi
Isolation	-	<-25dB	<-25dB
Polarisation	Vertical	Vertical	Vertical
Pattern	Omni-directional	Omni-directional	Omni-directional
Impedance	50Ω	50Ω	50Ω
Max Power Input (W)	25W	10W	10W
	GPS/GLONASS		
Frequency Range (MHz)	1562-1612		
VSWR	<2:1		
Gain	26dB		
Polarisation	Right Hand Circular		
Operating Voltage	3-5v DC (fed via coax)		
Cable	2x 230mm RG316 Terminated to SMA (m)		
Mechanical Data			
Dimensions (mm)	H80xW70xL230 *		
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)		
Material	ABS/PC		
Colour	Black		
Weight (g)	310		
Ingress Protection	IP66		
Cable Data			
Cable Type	RG316	RG316	RG316
length	280mm	160mm	200mm
Diameter	2.8	2.8	2.8
Termination	TNC (f)	SMA (f)	SMA (m) Reverse Polarity
Mounting Data			
Mounting Type	Panel mount		
Mounting Hole (mm)	15mm		
Max Panel Thickness (mm)	10mm		

Subject to change without prior notice. *Excluding external antenna


SK0200900 'Mallard' 8-in-1 Antenna Black incl. 5m Coax Cables - TETRA



Supplied Coax Extension Cables

Coax Cables	2x LTE	3x Wi-Fi	1x GPS	1x TETRA	1x GPS
Cable Type	SBC240	SBC240	SBC100	SBC195	SBC100
length	5m or 3m	5m or 3m	5m or 3m	5m or 3m	5m or 3m
Diameter (mm)	6.1	6.1	2.8	4.95	2.8
Min. Bend Radius (mm)	30	30	14	25	14
Operating Temp. °C	-40-80	-40-80	-40-80	-40-80	-40-80
Termination	SMA (m)	SMA Reverse Polarity (m)	SMA (m)	BNC (m)	SMA (m) – Motorola and Sepura adaptors supplied.
Labeling	LTE M & LTE A	Wi-Fi M & Wi-Fi A	GPS	TETRA	GPS TETRA

Cable Diagram

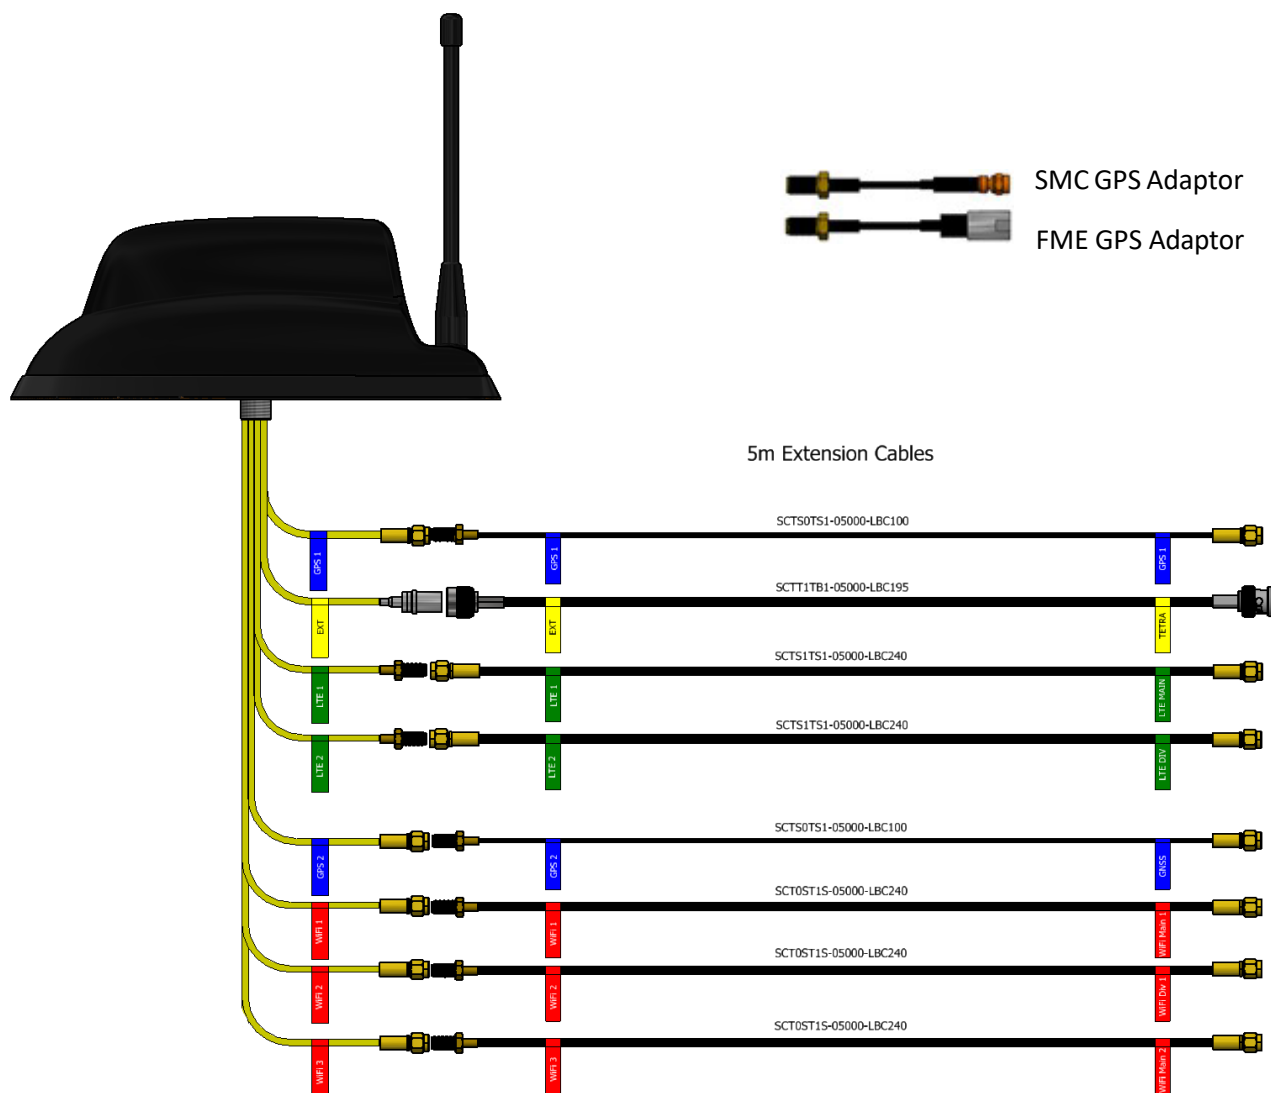

www.sure-antennas.com

A brand of




A MEMBER OF




MOBILE RADIO

LTE VSWR Plot

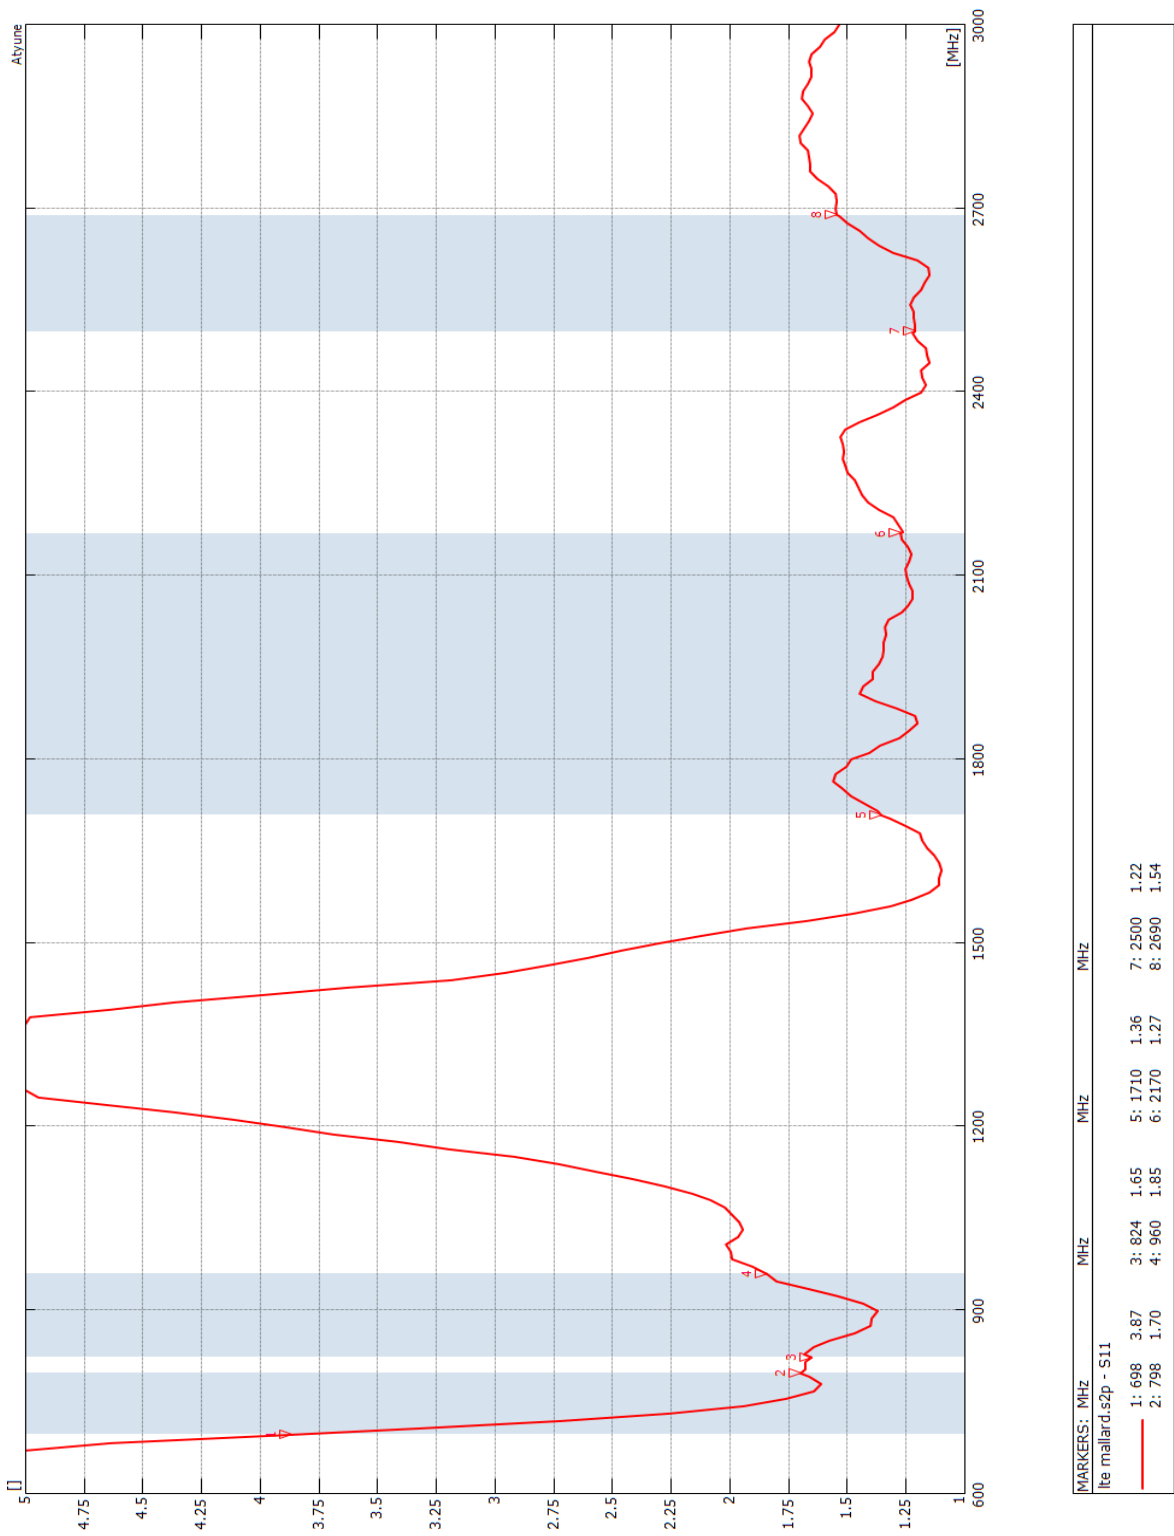


Subject to change without prior notice.

Wi-Fi VSWR Plot

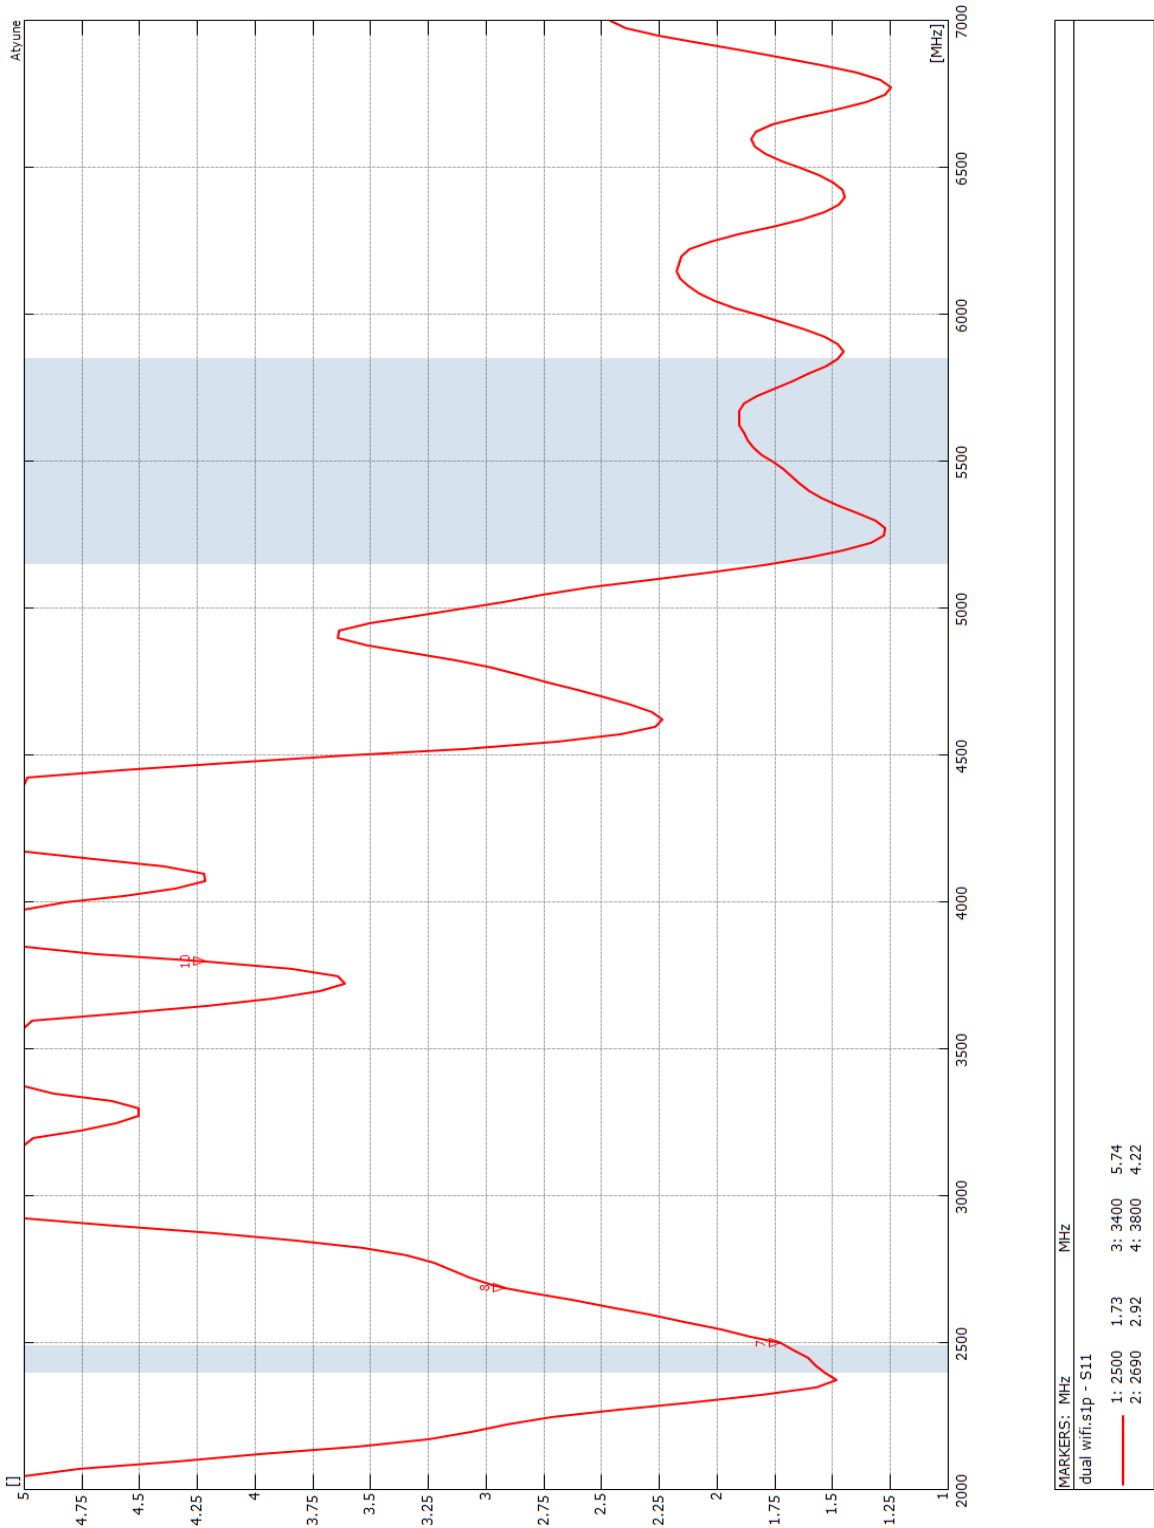


Subject to change without prior notice.

TETRA VSWR Plot

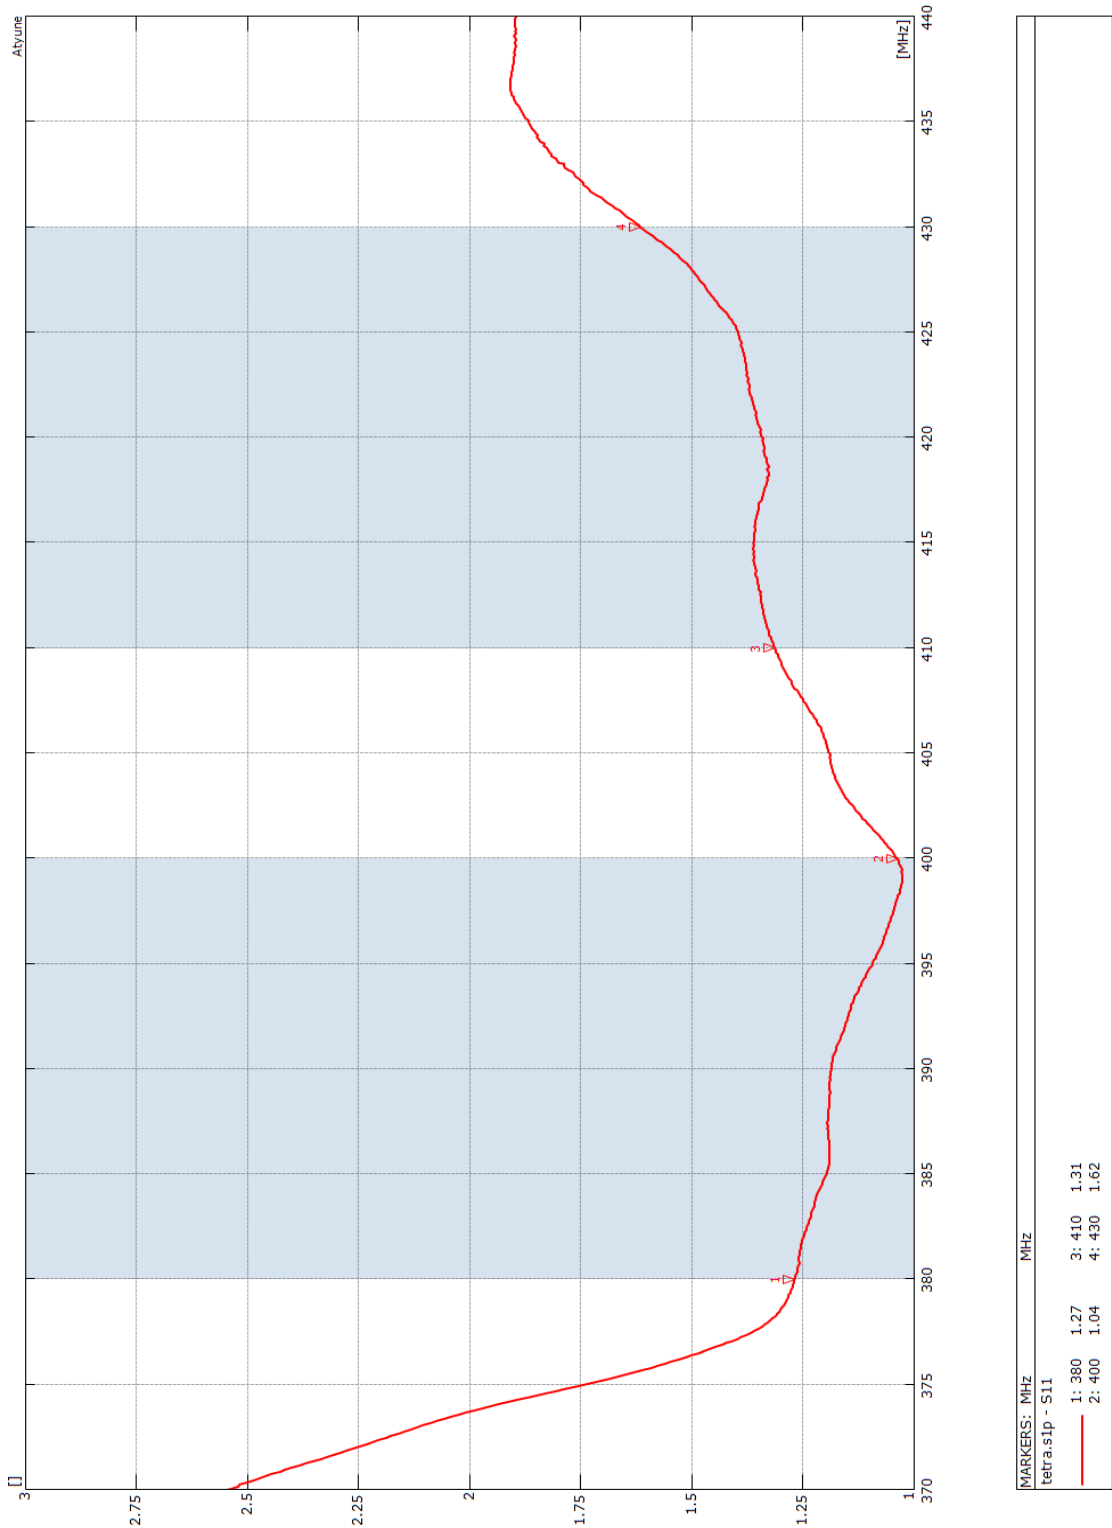


Subject to change without prior notice.

5G VSWR Plot

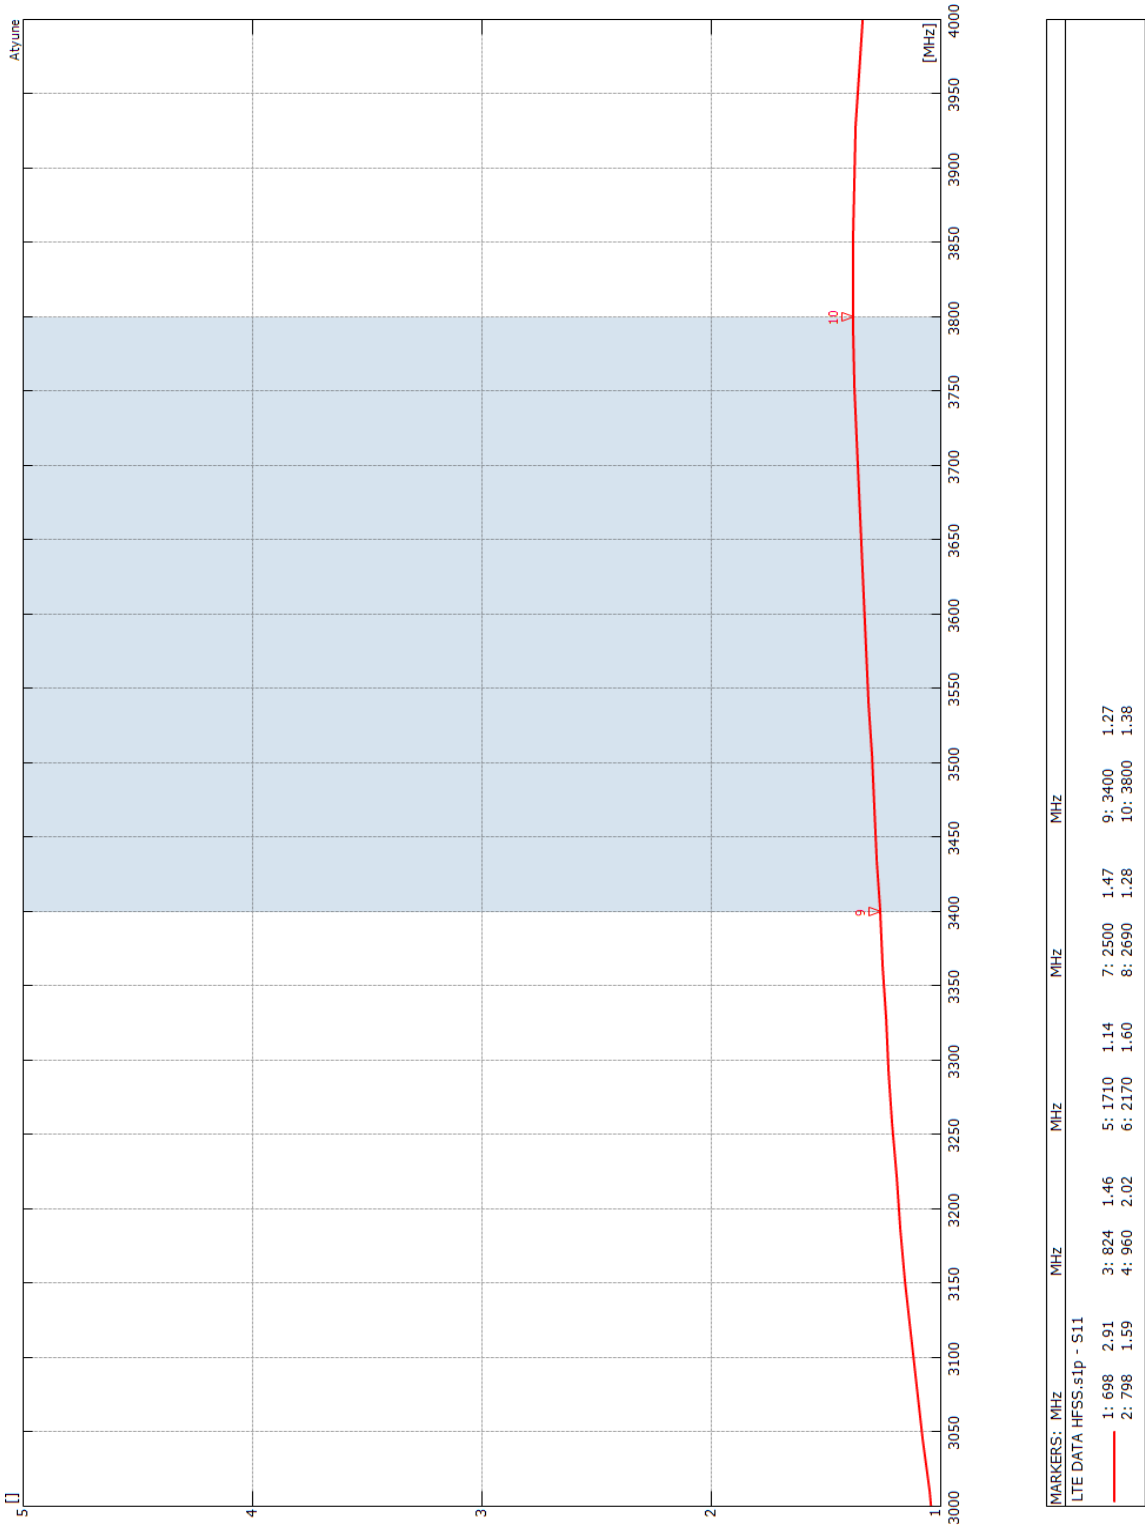


Subject to change without prior notice.

TETRA & LTE Isolation

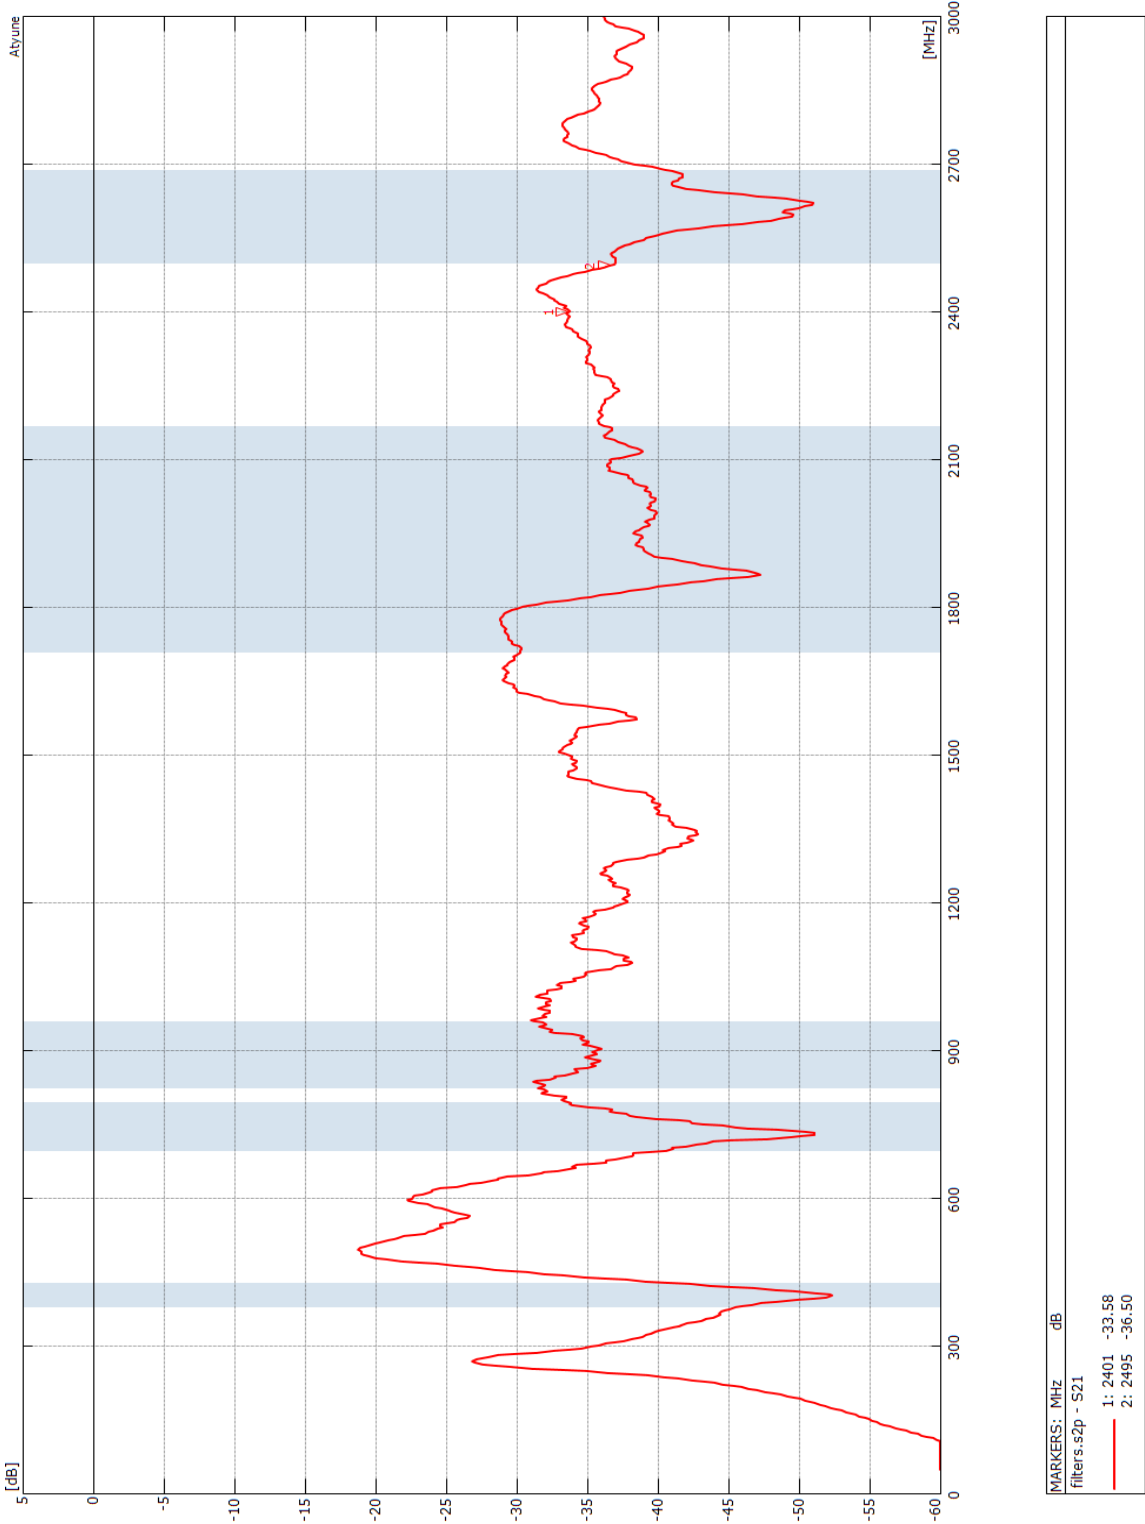

Subject to change without prior notice.

LTE Correlation Coefficient

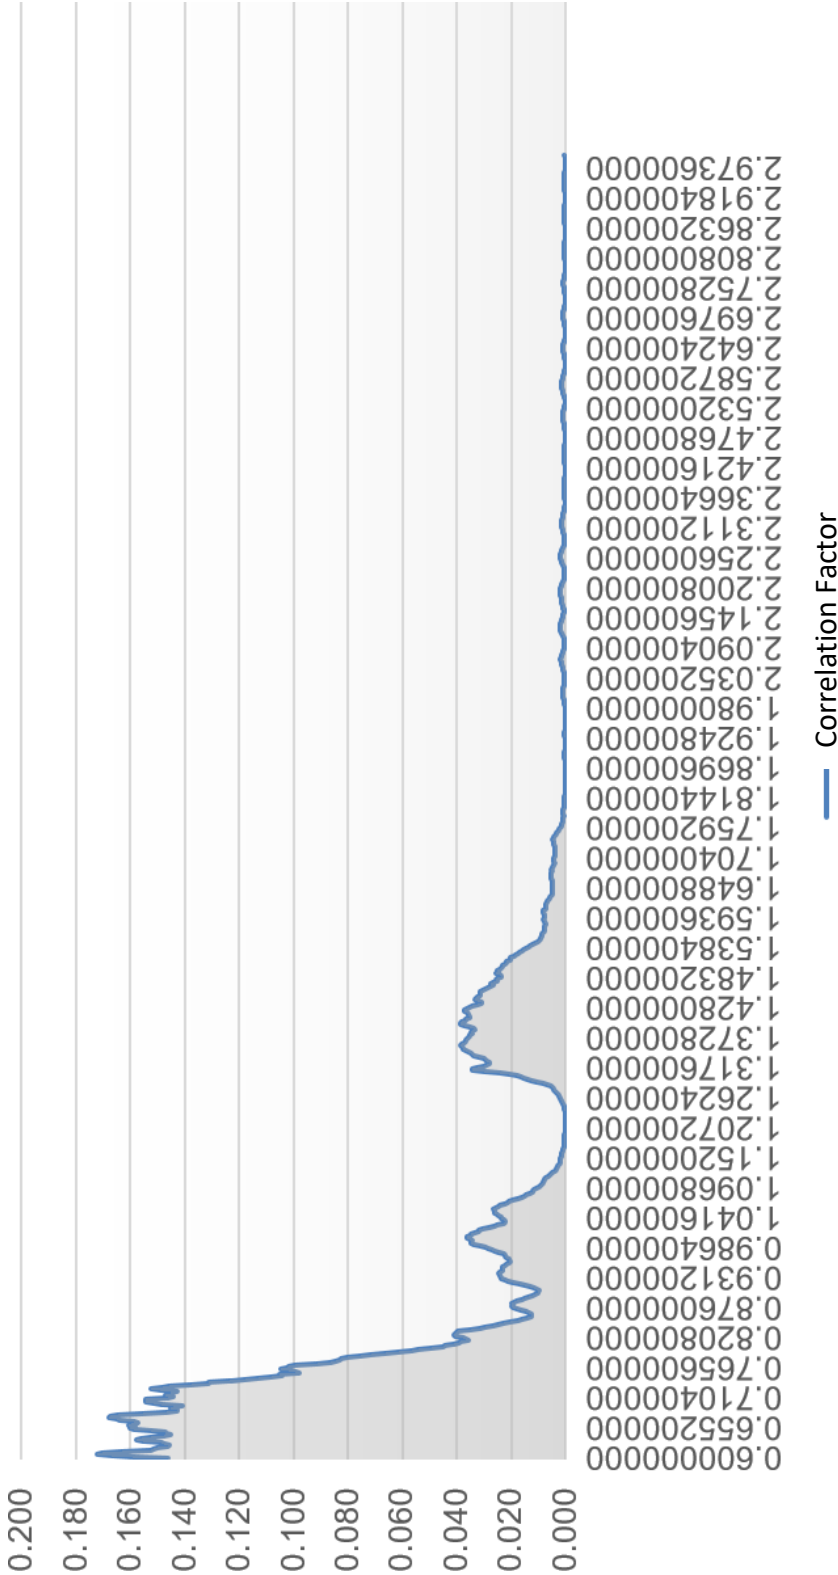


Subject to change without prior notice.

SK0200900 'Mallard' 8-in-1 Antenna Black incl. 5m Coax Cables - TETRA




Antenna 3D Gain Plots


820MHz

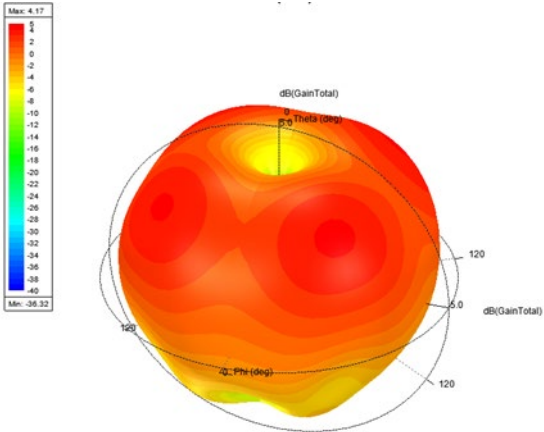


1820MHz

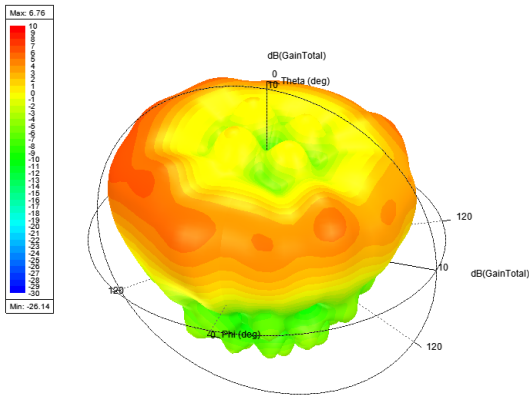


2140MHz

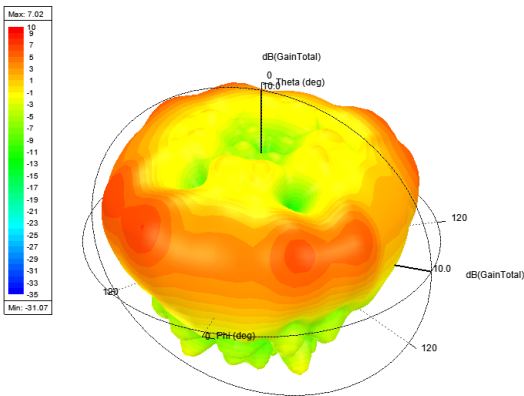

2600MHz

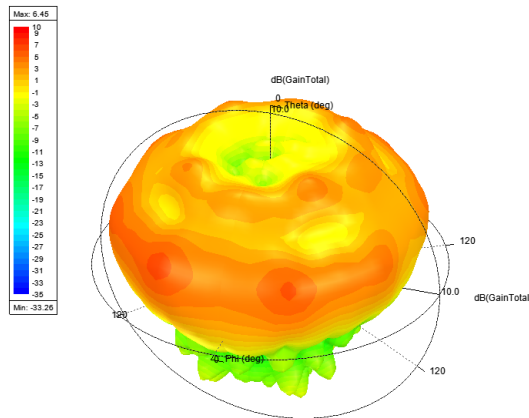

3600MHz

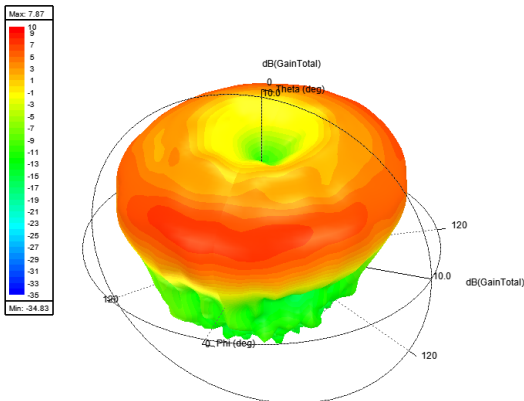

Subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom
Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 334 9160 | E. sales@sure-antennas.com