


8000-312 Multifunction 'Sandcastle' 15-in-1 Antenna



**5 YEARS
WARRANTY**

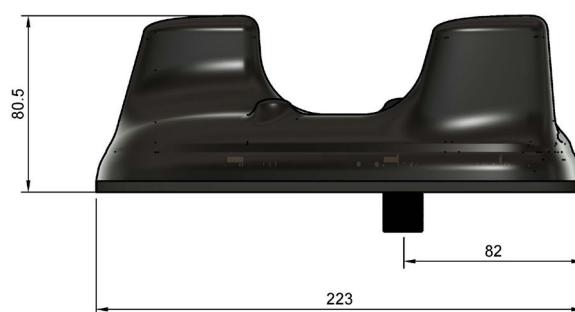

The 'Sandcastle' is a multifunction antenna designed to **future-proof** blue-light and amber-light vehicle fleets, delivering **up to 18 functions** within a single, panel-mounted unit. This variant features **15 functions** which are **4x LTE, 6x GPS, 4x Wi-Fi, 1x TETRA**.

Equipped with six ultra-wideband cellular elements covering **700 MHz to 6 GHz**, the Sandcastle ensures reliable performance today while supporting future requirements for years to come. With a **minimum 4 dBi gain** across the band, it offers exceptional efficiency for all public safety applications.

This antenna is **ESN-ready** and fully compatible with **current Airwave systems**, making it ideal for agencies transitioning between networks. If the whip option is not required, the 'Sandcastle' can be installed as a **ground-plane-independent antenna**, simplifying installation.

Featuring integrated **GPS, MiMo dual-band Wi-Fi**, and an **optional TETRA whip**, the Sandcastle eliminates the need for multiple holes in the roof, requiring only a **single 19 mm mounting hole**. Additional variants are available, including low-loss coaxial cable fitting kits. **For more details, please contact us.**

Also Available in White: Part No. 8000-212



Part No.
SK010038

Cable Kit Options

Product Kit : Generic Sandcastle Cable Kit 5m : Terminated

Additional options available upon request.

www.sure-antennas.com

A brand of



MOBILE RADIO

8000-312 Multifunction 'Sandcastle' 15-in-1 Antenna



Technical Specifications


Part No.	8000-312		
Electrical Data	TETRA	LTE	Wi-Fi
Frequency Range (MHz)	380 - 430 MHz	698-6000 MHz	2.4 GHz & 5.8GHz
Band	TETRA	Wideband LTE 4x4 MiMo	Dual Band Wi-Fi 4x4 MiMo
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi*	Minimum 4dBi
Isolation	-	<-25dB	<-25dB
Polarisation	Vertical	Vertical	Vertical
Pattern	Omni-directional	Omni-directional	Omni-directional
Impedance	50Ω	50Ω	50Ω
Max Power Input (W)	25W	10W	10W
GPS/GLONASS			
Frequency Range (MHz)	1562-1612		
VSWR	<2:1		
Gain	26dB		
Polarisation	Right Hand Circular		
Operating Voltage	3-5v DC (fed via coax, each port is DC isolated)		
Cable	2x RG316 Terminated to SMA (m)		
Mechanical Data			
Dimensions (mm)	H76 x W197 x L227 **		
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)		
Material	ABS		
Colour	Black		
Weight (g)	600		
Cable Data			
Cable Type	RG316	RG316	RG316
length (mm)	300	300	300
Diameter	2.8	2.8	2.8
Termination	TNC (f)	SMA (f)	SMA (m) Reverse Polarity
Mounting Data			
Mounting Type	Panel mount with adhesive pad		
Mounting Hole (mm)	19mm		

Subject to change. *Ground plane dependent **Excluding optional whip.




8000-312 Multifunction 'Sandcastle' 15-in-1 Antenna

Cable Diagram

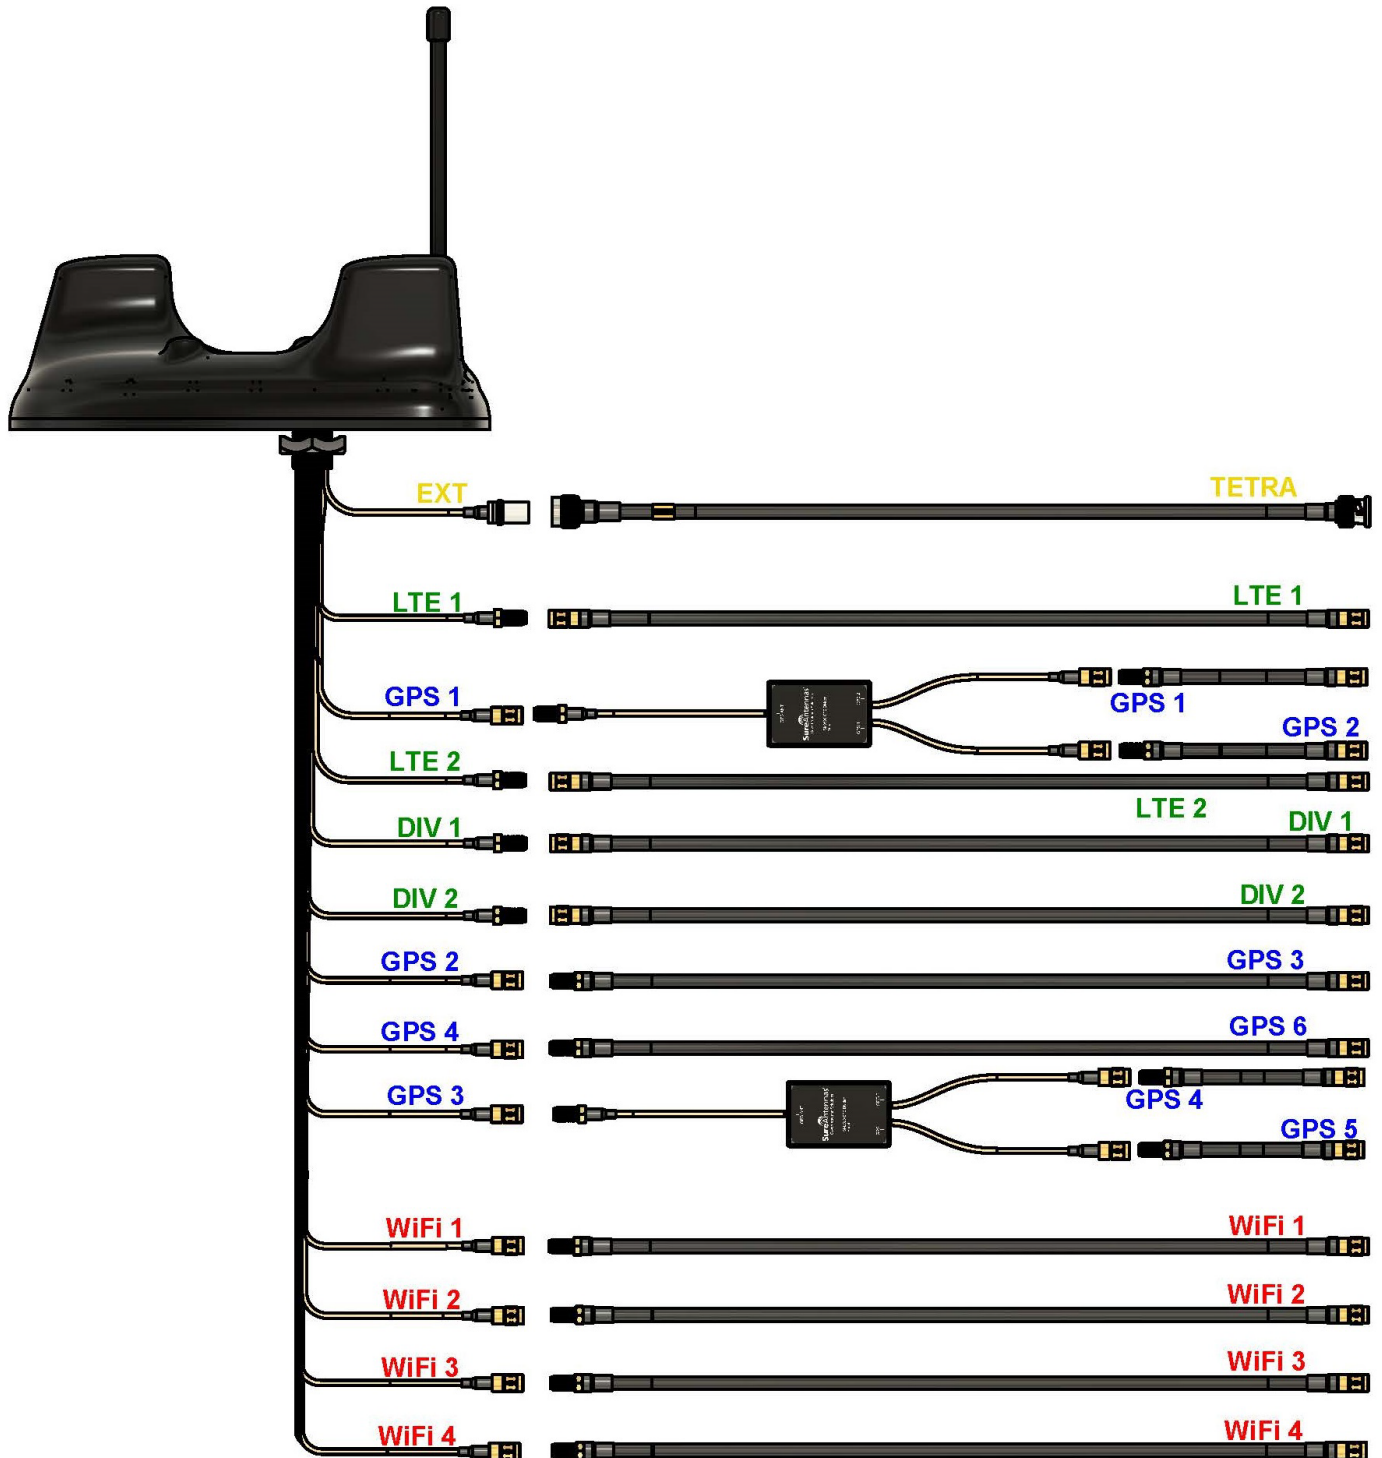


LTE VSWR Plot

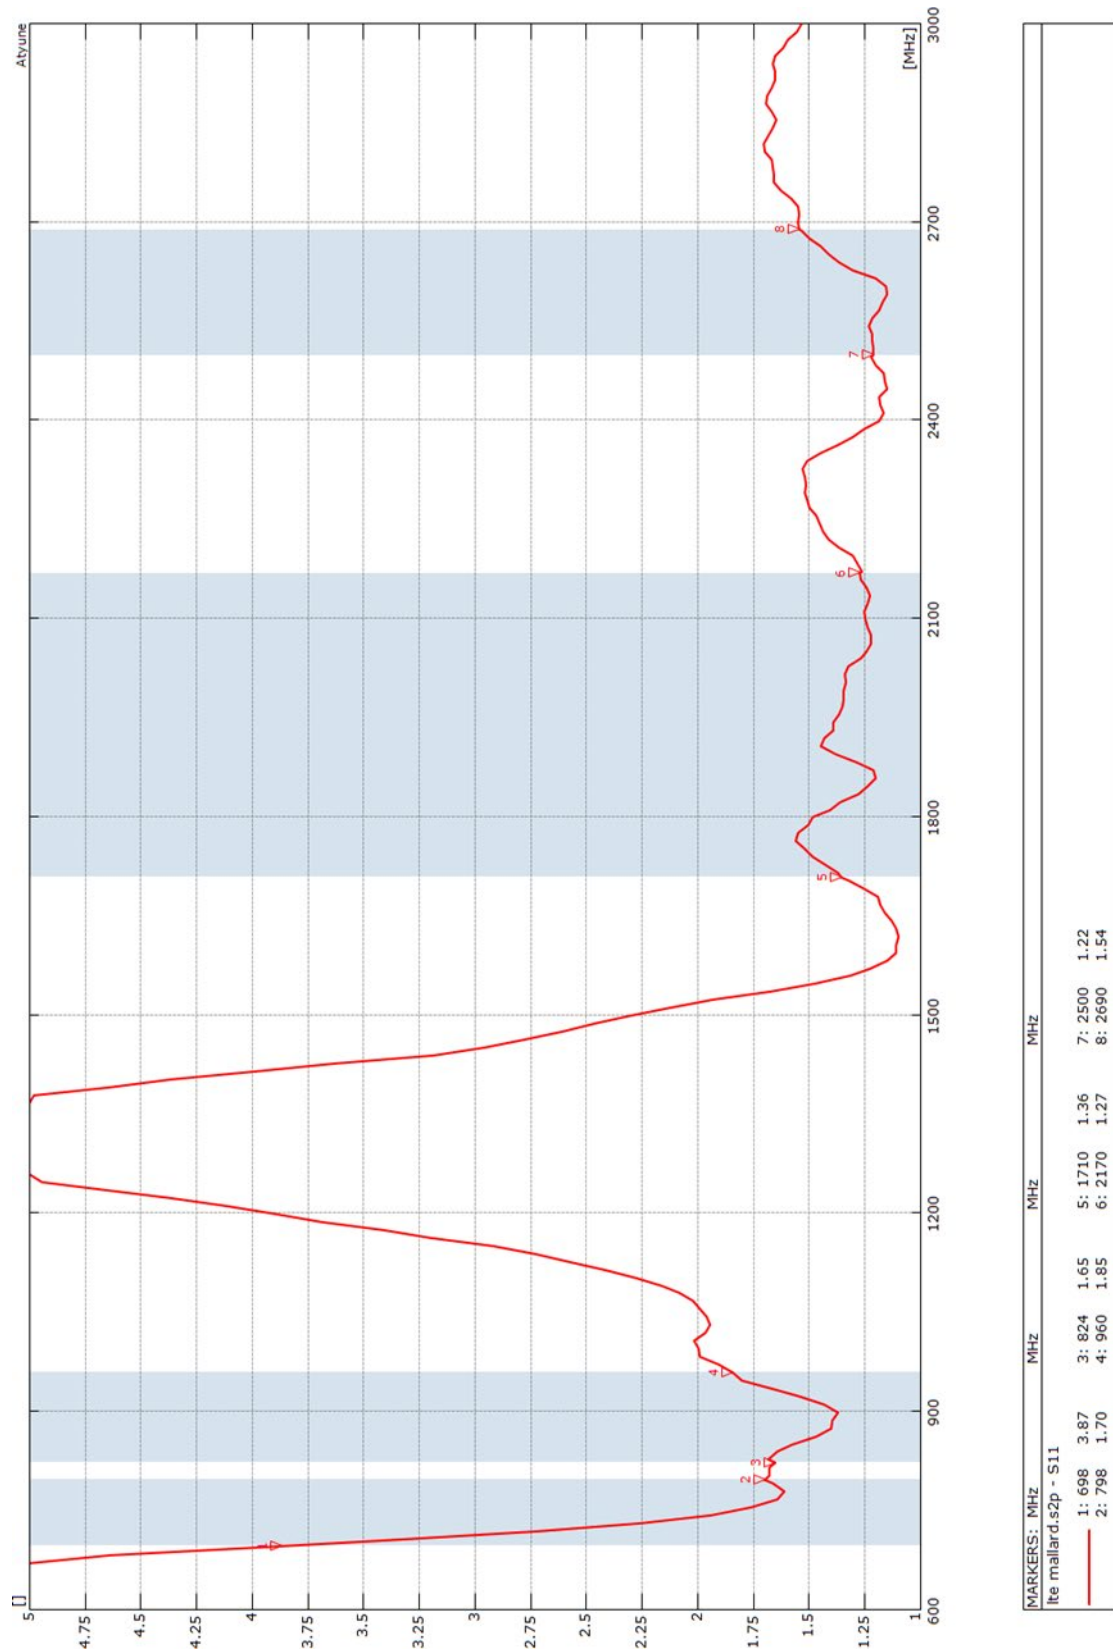


Subject to change without prior notice.

Wi-Fi VSWR Plot

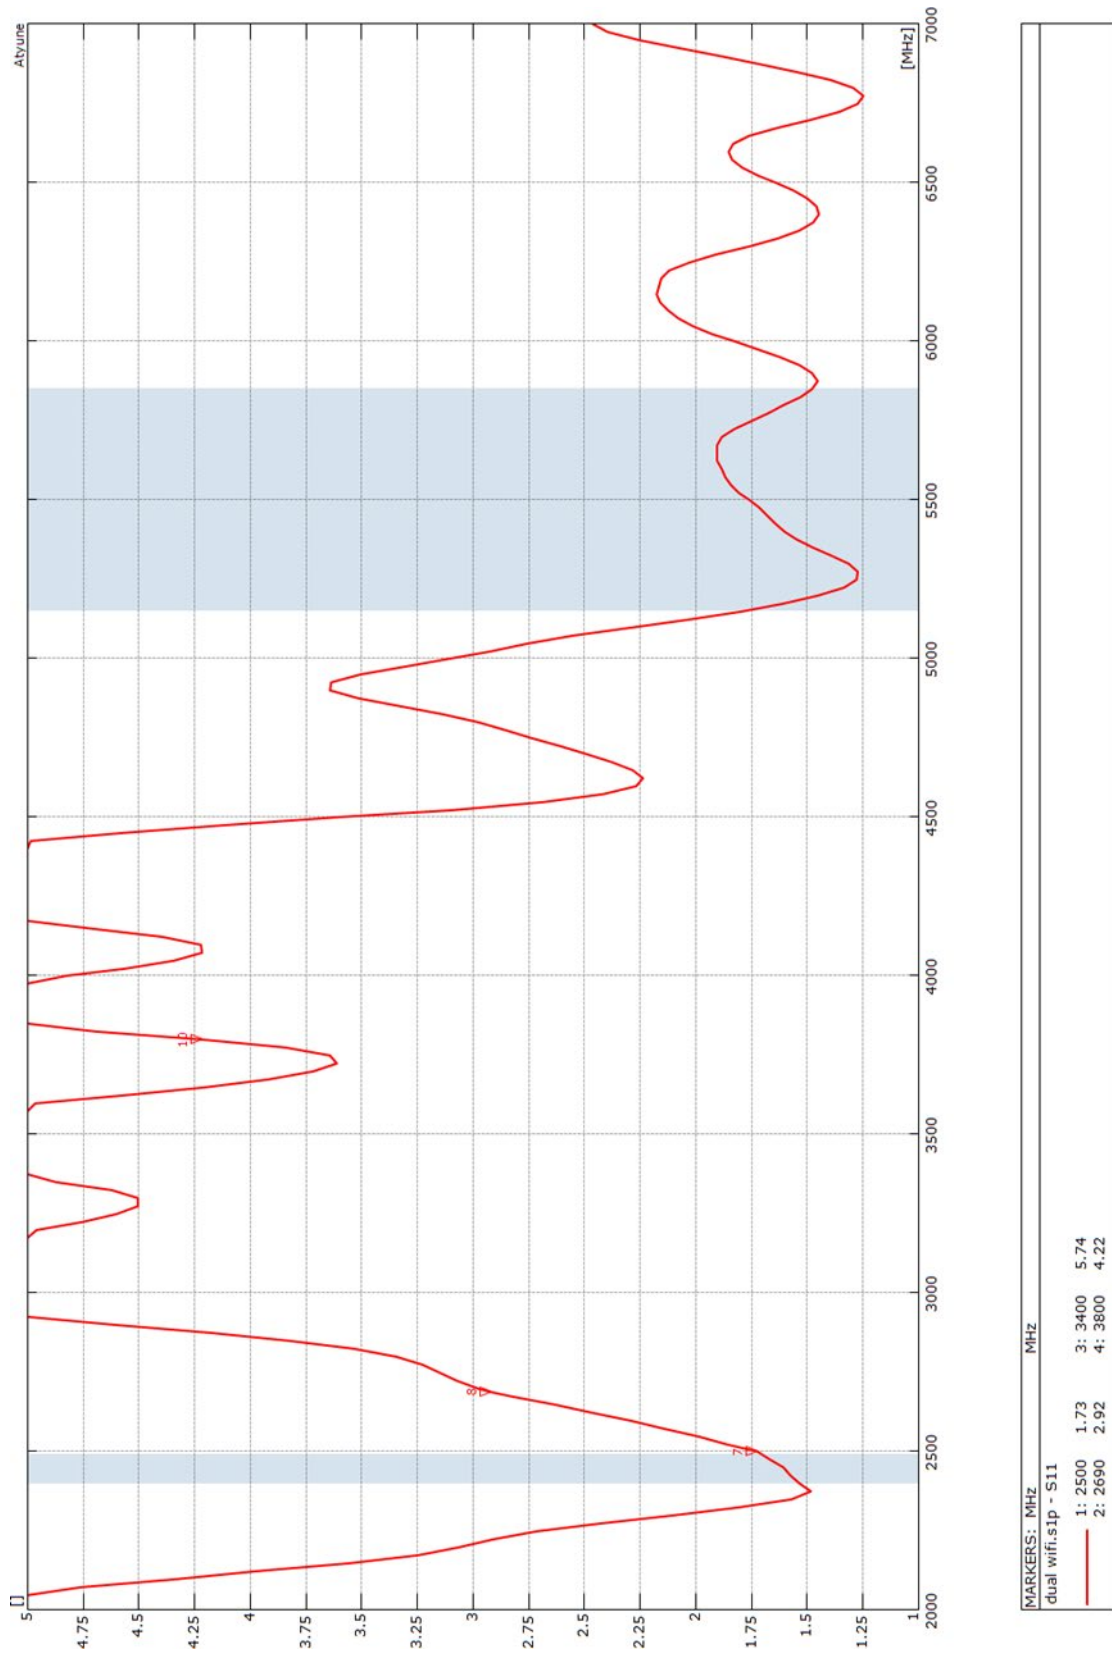


Subject to change without prior notice.

TETRA VSWR Plot

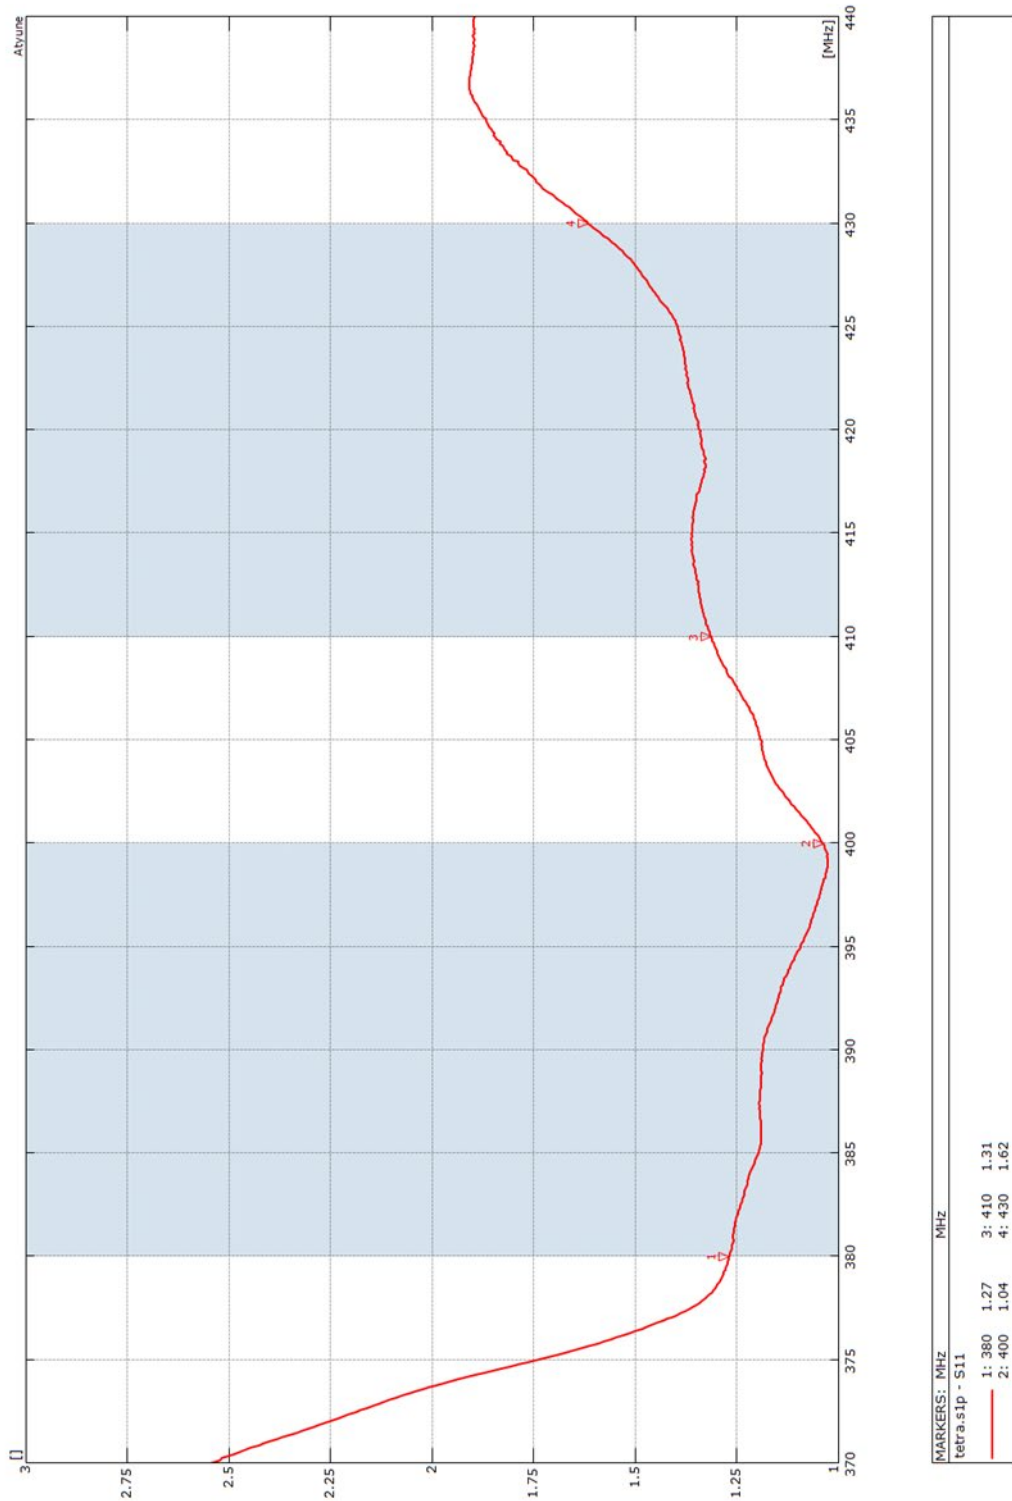


Subject to change without prior notice.

5G VSWR Plot

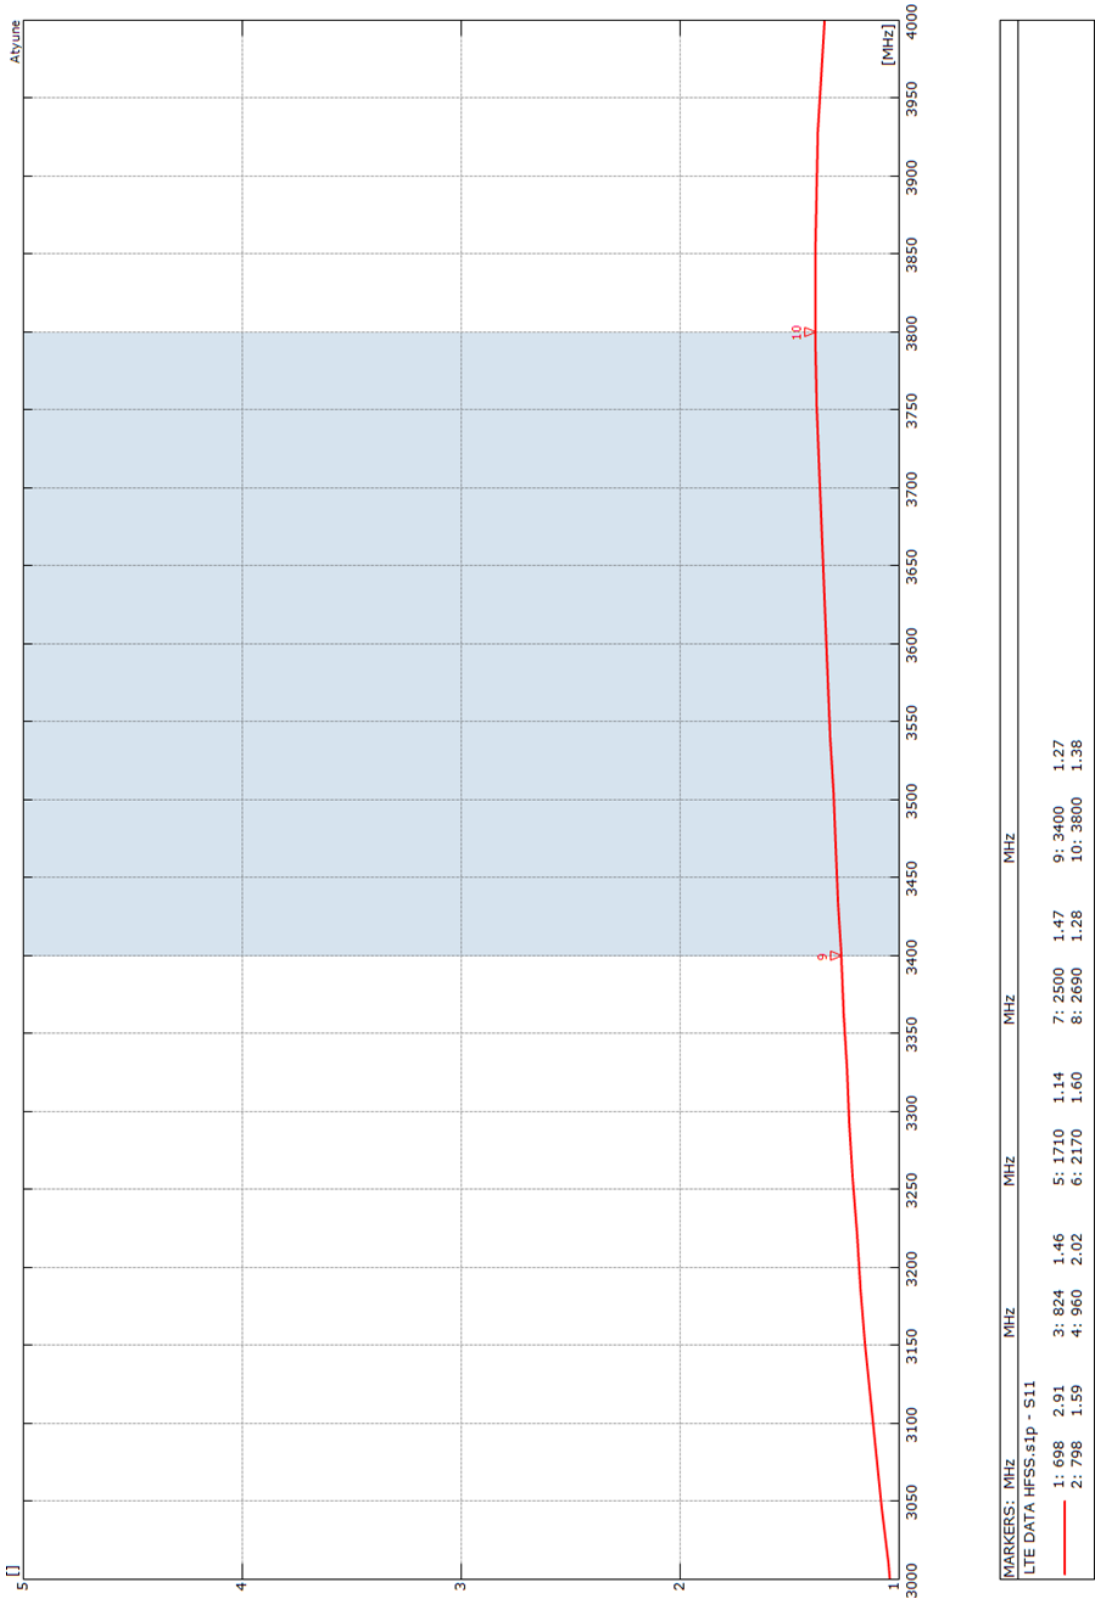


Subject to change without prior notice.

TETRA & LTE Isolation

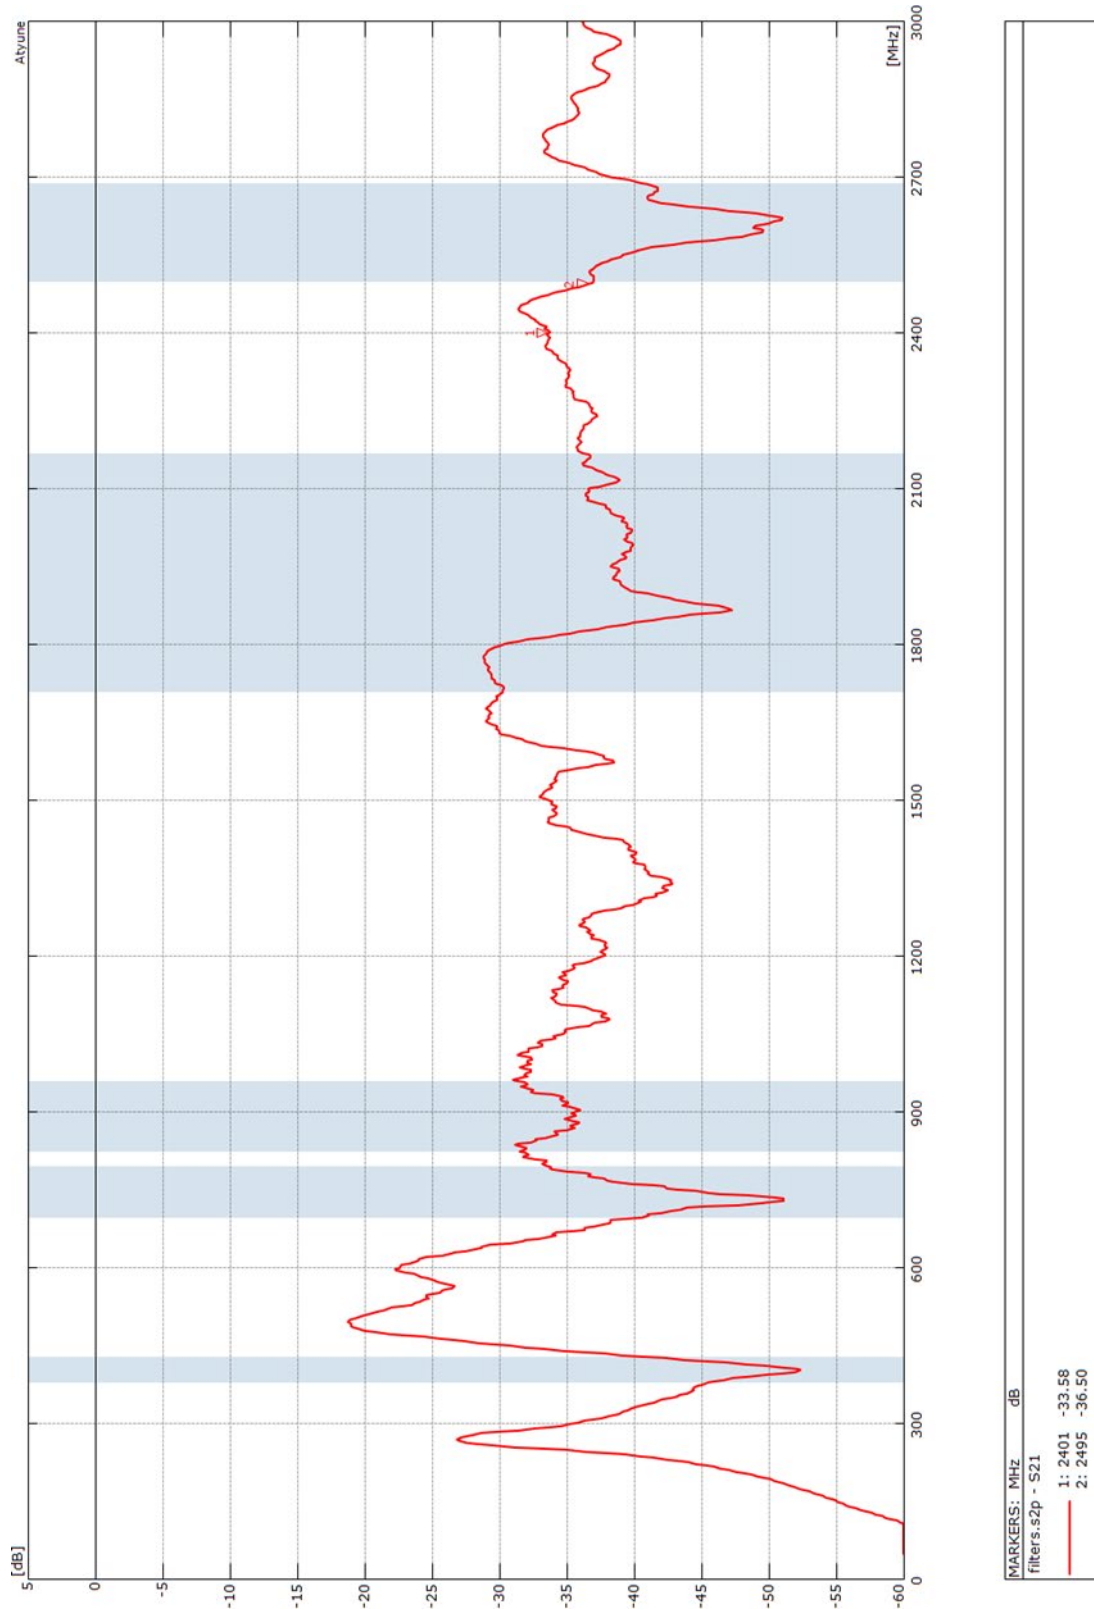

Subject to change without prior notice.

LTE Correlation Coefficient

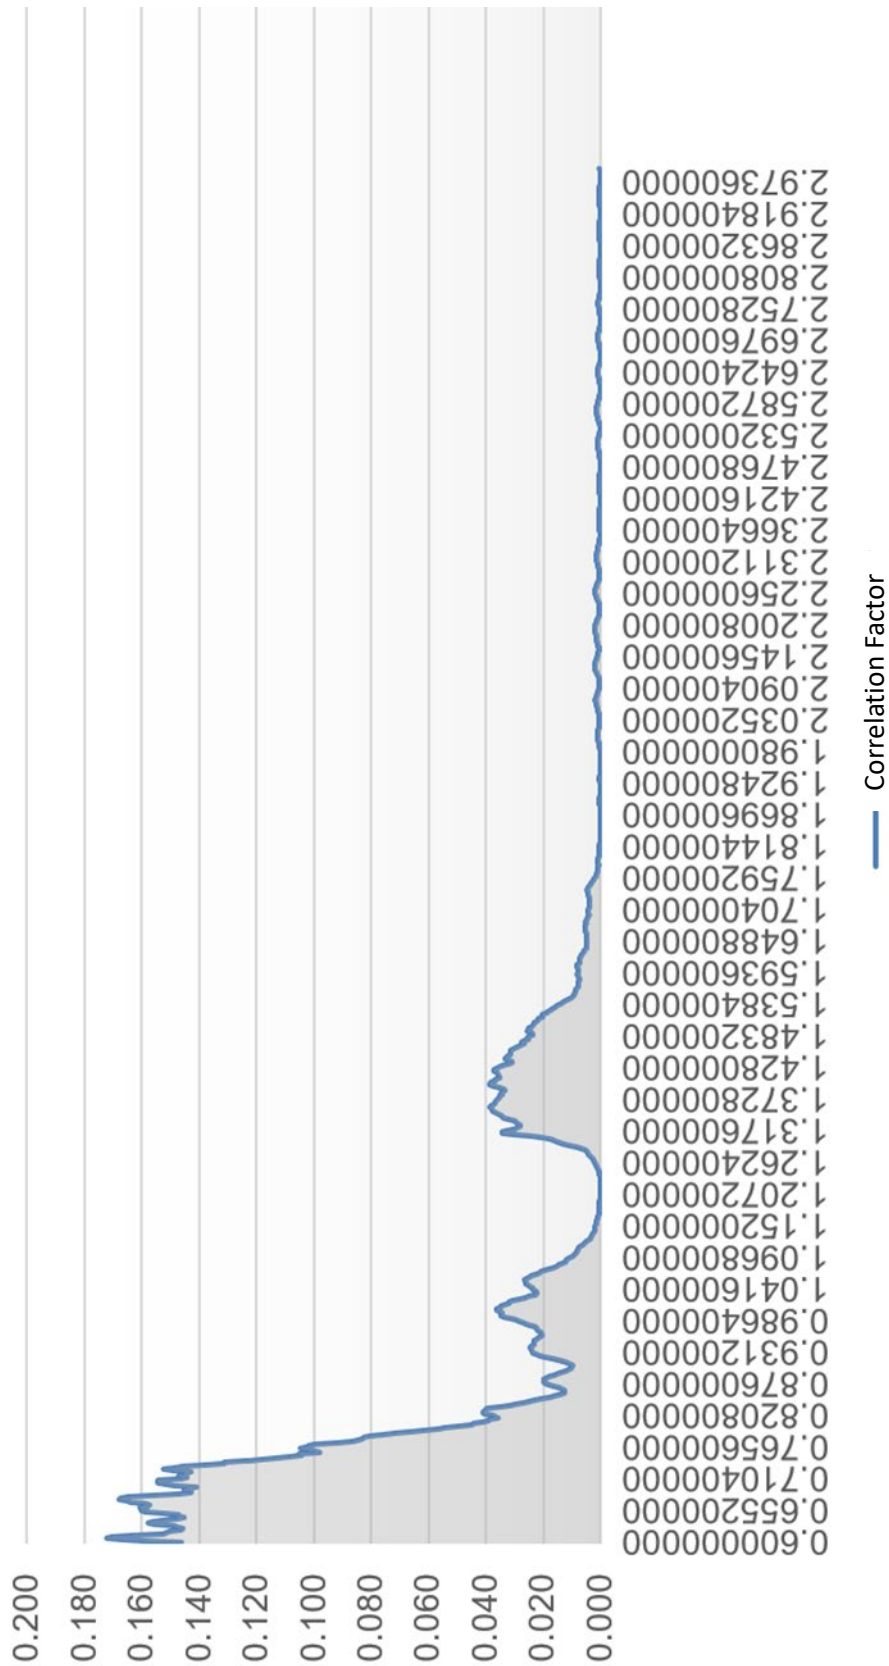


Subject to change without prior notice.

8000-312 Multifunction 'Sandcastle' 15-in-1 Antenna




3D Radiation Pattern


820MHz

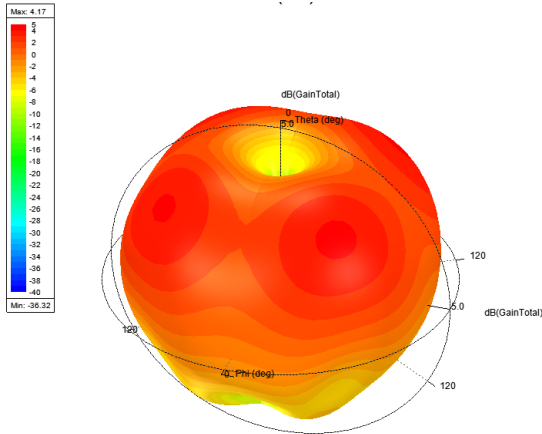


1820MHz

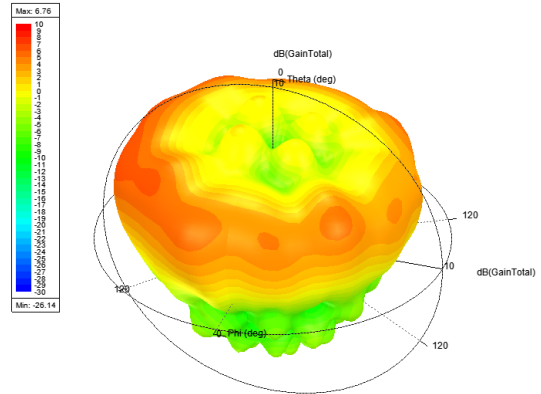


2140MHz

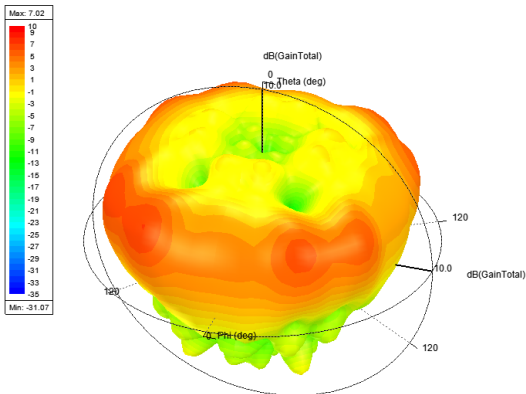

2600MHz

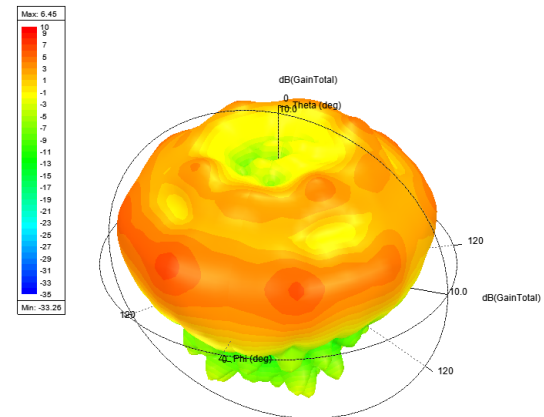

3600MHz

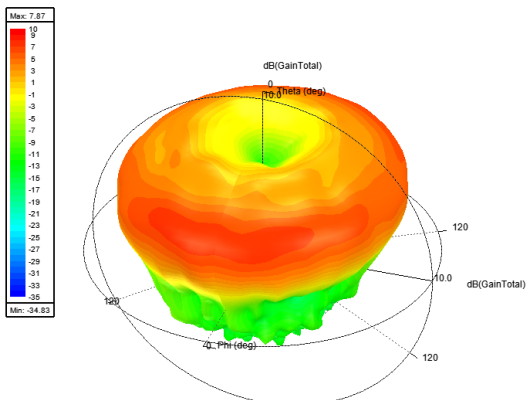

Subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom
Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 334 9160 | E. sales@sure-antennas.com

www.sure-antennas.com

A brand of



MOBILE RADIO