

# 8000-311 Sandcastle 13-in-1 Multifunction MiMo Antenna

**5 YEARS WARRANTY**



The 'Sandcastle' is a low-profile, multifunction antenna designed for blue-light and amber-light vehicle fleets, combining up to 18 functions within a single panel-mounted unit. With optional fitting kits, the 'Sandcastle' can be installed using the existing OEM mounting hole, preventing the need to drill additional holes and maintaining OEM functions.

This variant supports **13 Functions** including **TETRA, 4x LTE, 4x WiFi and 4x GPS**

The Sandcastle portfolio includes variants that are **ESN-ready** and fully compatible with **current Airwave system**, making it ideal for future proofing your fleet for the upcoming transition to LTE.

**Also Available in White: Part No. 8000-211**



Part No.	Cable Kit Options
SK0200710	Product Kit : Sandcastle 13 in 1 Antenna : Black : 4x4 LTE/Cellular 6x6 Wi-Fi 2x GPS 1xTetra; - c/w 5m Low Loss Coax Extension Cables - Terminated
SK0200713	Product Kit : Sandcastle 13 in 1 Antenna : Black : 4x4 LTE/Cellular 6x6 Wi-Fi 2x GPS 1xTetra; - c/w 2m Low Loss Coax Extension Cables - Terminated

Additional options available upon request.

## Technical Specifications

Part No.	800-311		
<b>Electrical Data</b>			
Frequency Range (MHz)	380 – 430 MHz	700 – 6000 MHz	2.4 GHz & 5.8 GHz
Band	OPTIONAL TETRA WHIP	4x Wideband LTE 4x4 MiMo	4x Dual Band Wi-Fi 4x4 MiMo
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi	Minimum 4dBi
Isolation	-	<-25dB	<-25dB
Polarisation	Vertical	Vertical	Vertical
Pattern	Omni-directional	Omni-directional	Omni-directional
Impedance	50Ω	50Ω	50Ω
Max. Power Input (W)	25W	10W	10W
<b>GPS/GLONASS Data</b>			
Frequency Range (MHz)	1562 – 1612 MHz		
VSWR	<2:1		
Gain	26dB		
Polarisation	Right Hand Circular		
Operating Voltage	3-5v DC (fed via coax, each port is DC isolated)		
Cable	4x RG316 Terminated to SMA (m)		
<b>Mechanical Data</b>			
Dimensions (mm)	H76 x W197 x L227 *		
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)		
Material	ABS		
Colour	Black		
Weight (g)	600		
<b>Cable Data</b>			
Cable Type	RG316	RG316	RG316
Length (mm)	300	300	300
Diameter	2.8	2.8	2.8
Termination	TNC (f)	SMA (f)	SMA (m) Reverse Polarity
<b>Mounting Data</b>			
Mounting Type	Panel Mount with Adhesive Pad		
Mounting Hole (mm)	19mm		


Subject to change. \*Excluding optional whip.

## Cable Diagram






LTE / DIV Ports – Mismatch Efficiency

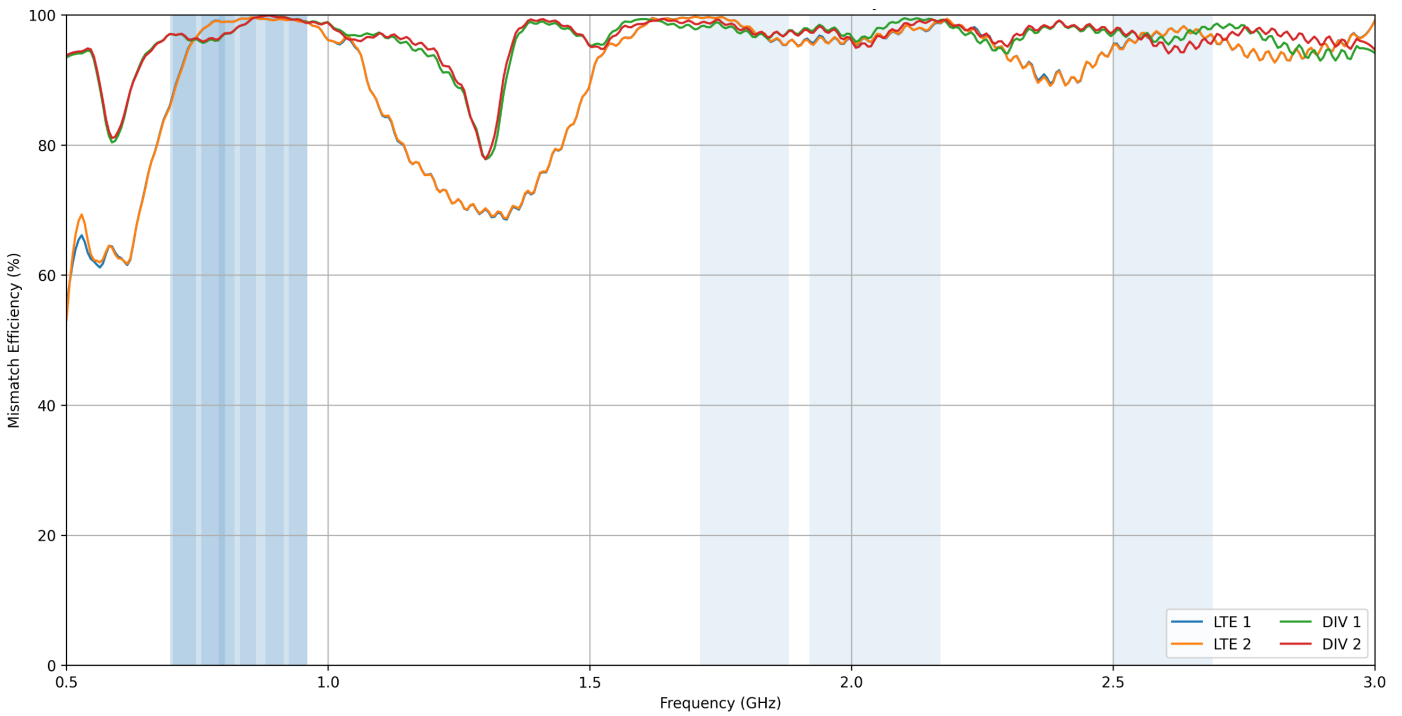


LTE ECC (Cut at 3 GHz)

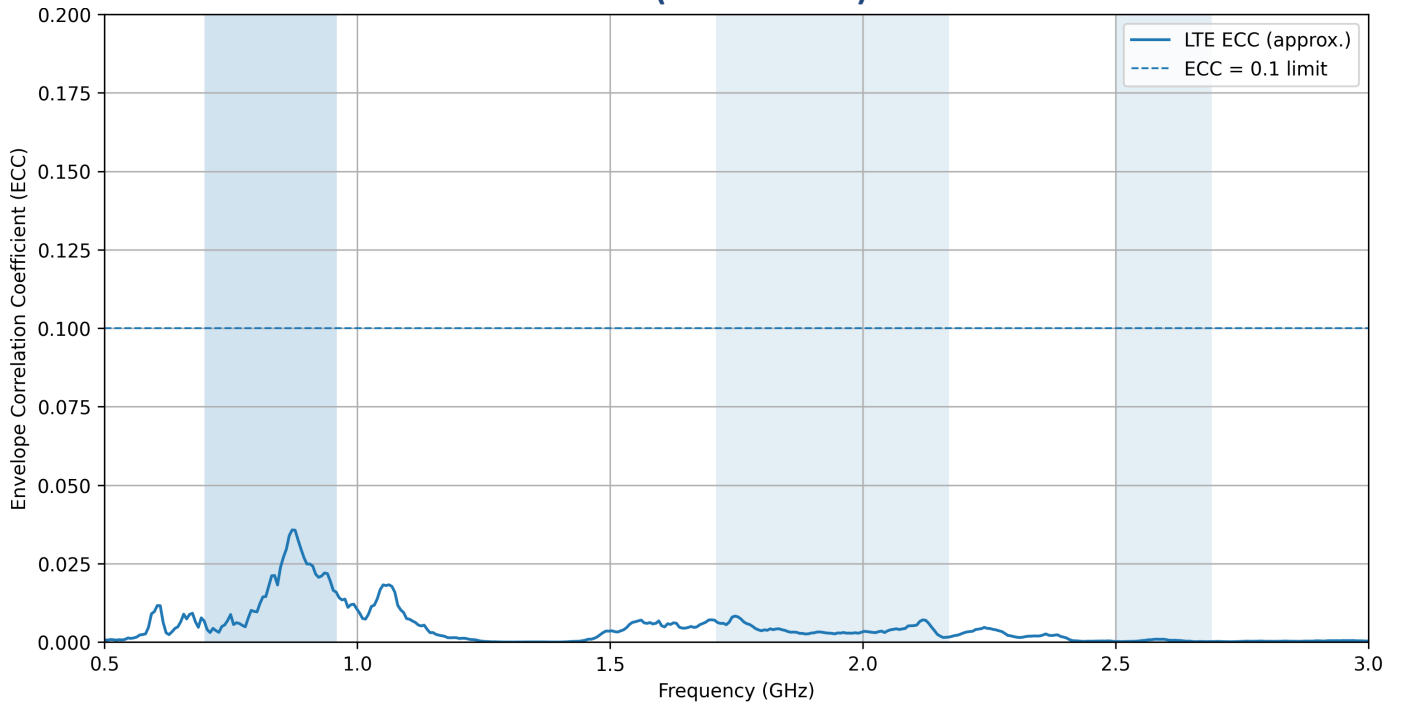


Subject to change without prior notice.

LTE Port Isolation (Cut at 3 GHz)

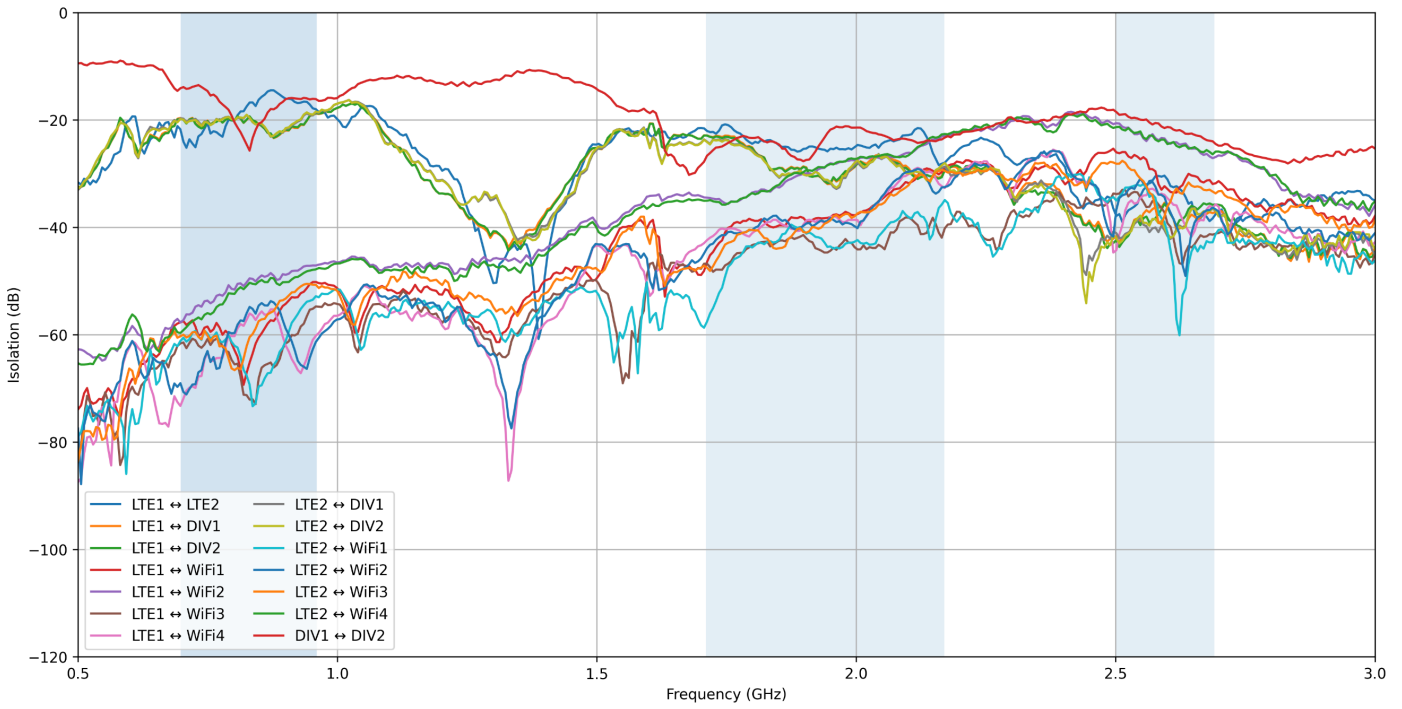


LTE Return Loss

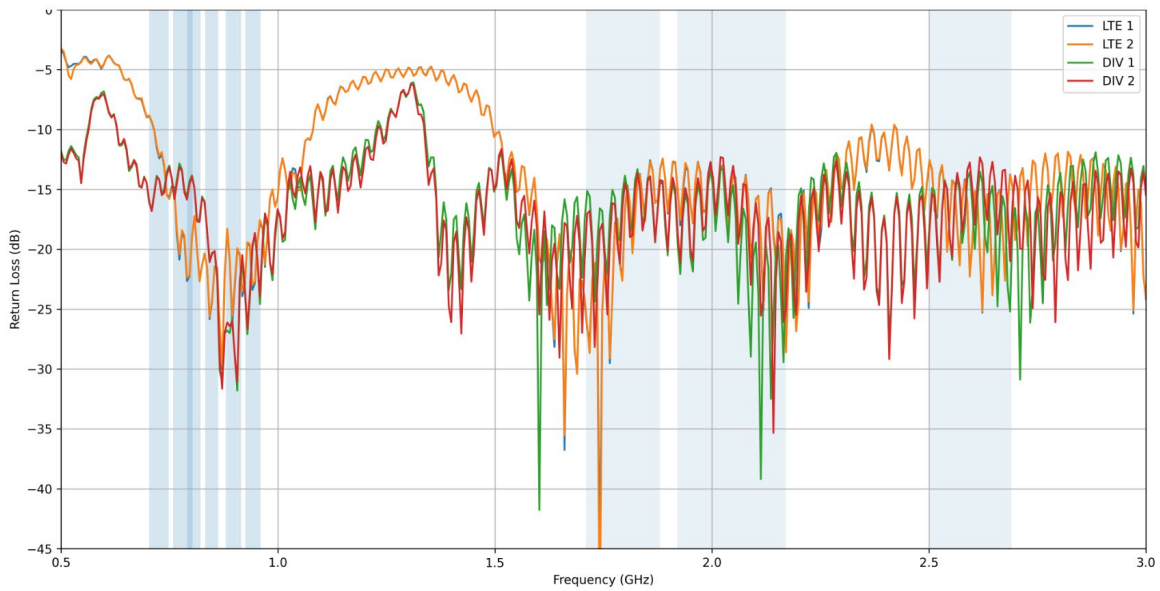


Subject to change without prior notice.

TETRA Port Isolation to All Other Parts (S21)

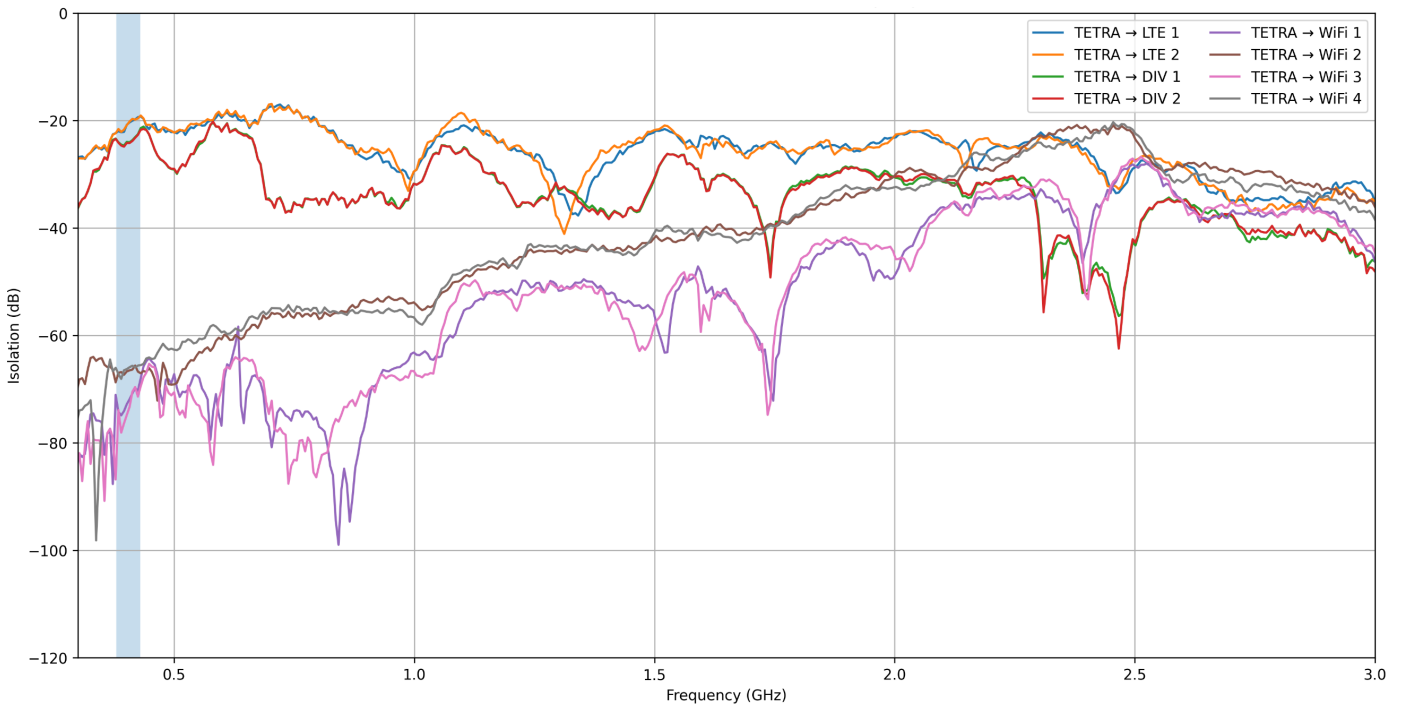


TETRA Port -Mismatch Efficiency (380-430 MHz)

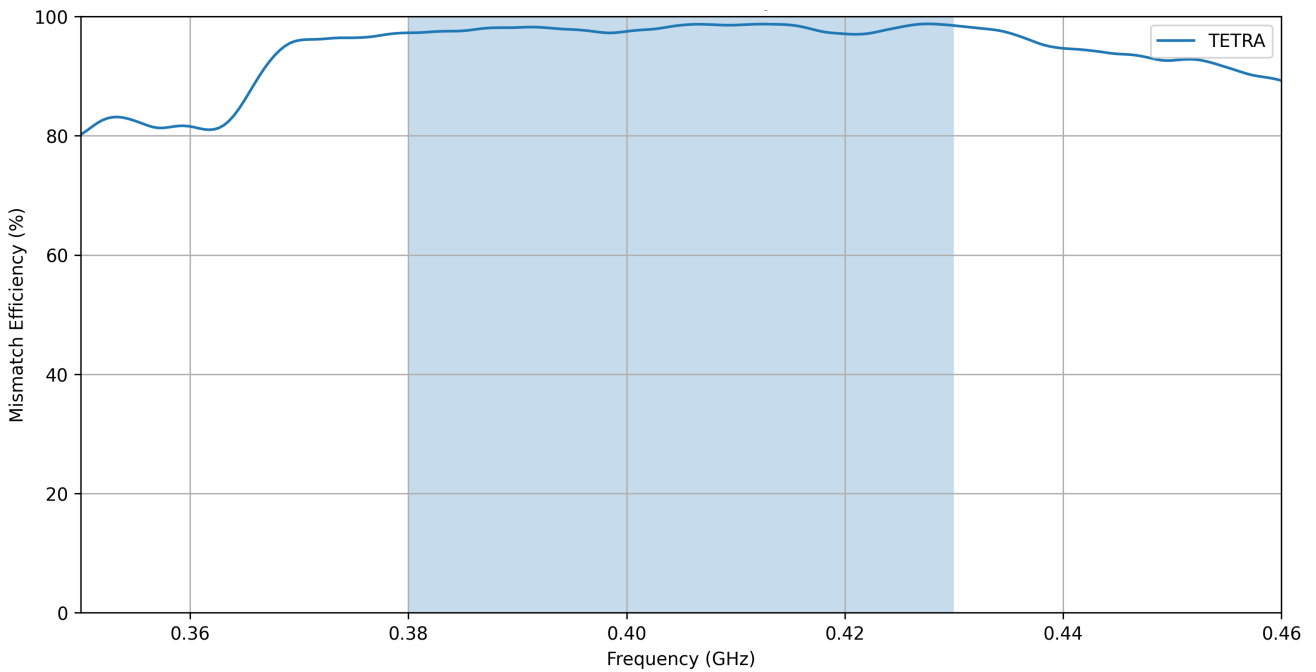


Subject to change without prior notice.

TETRA Antenna – Return Loss (380-430 MHz)

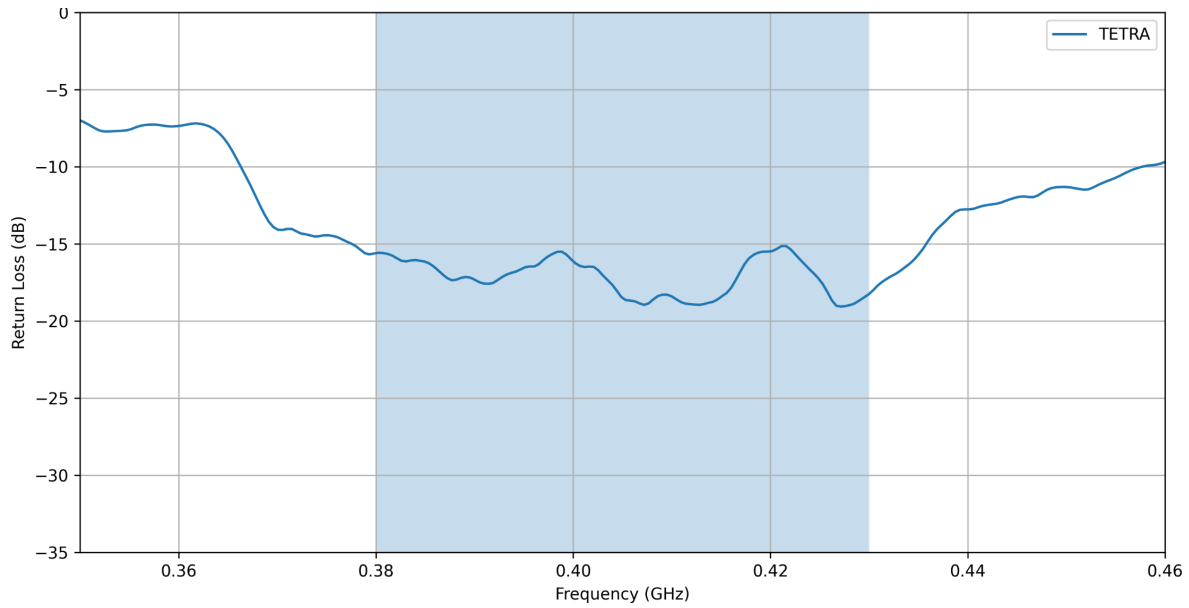


WiFi Port-to-Port Isolation (Updated Measurements)

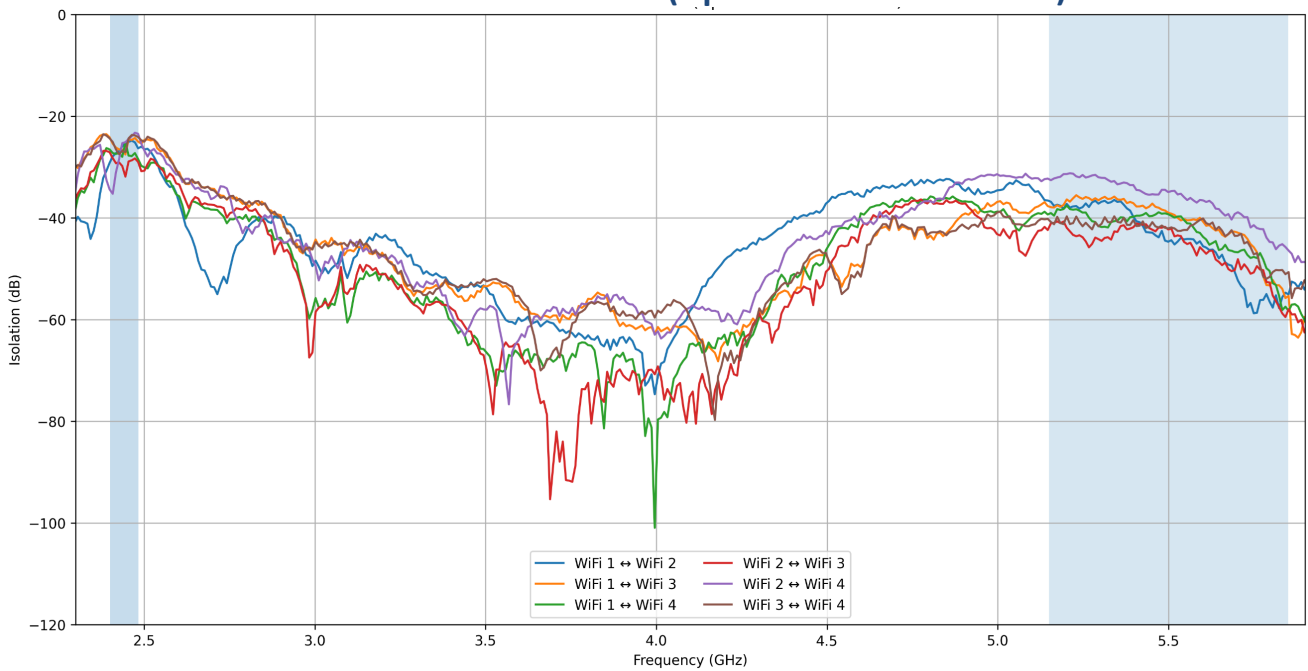


Subject to change without prior notice.

WiFi Ports -Mismatch Efficiency

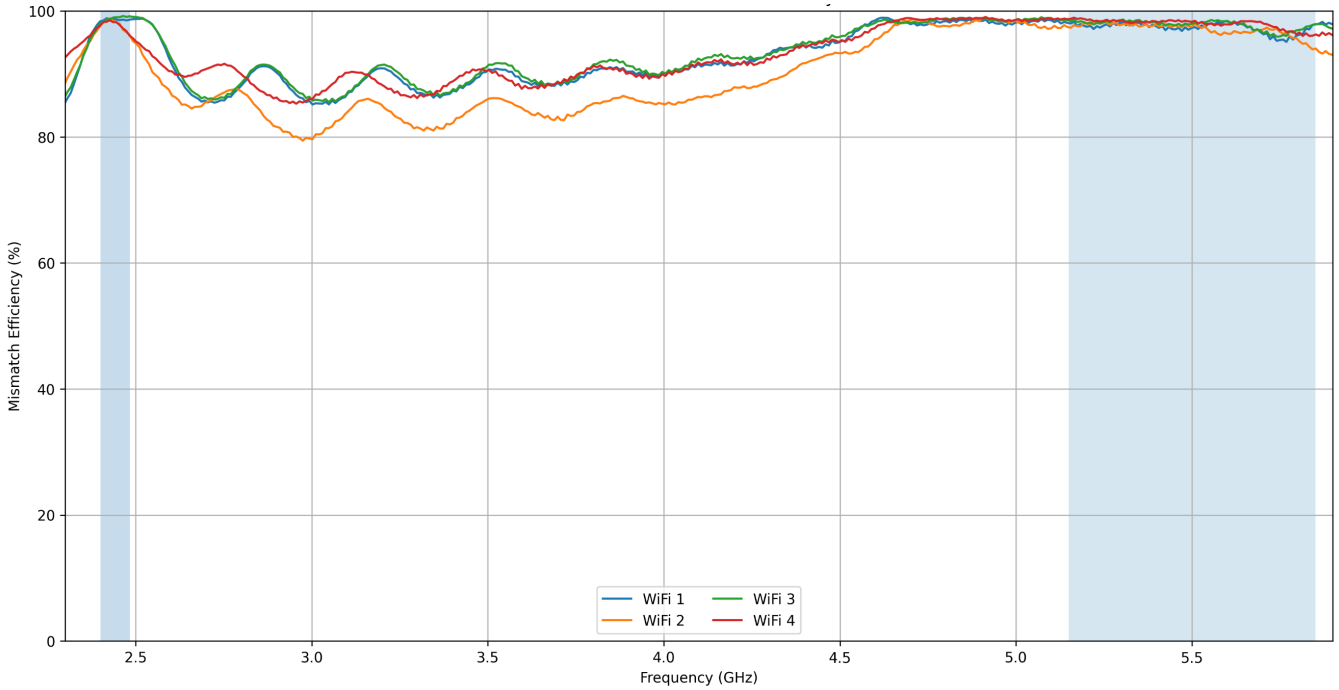

WiFi Antenna – Dual-Band Return Loss

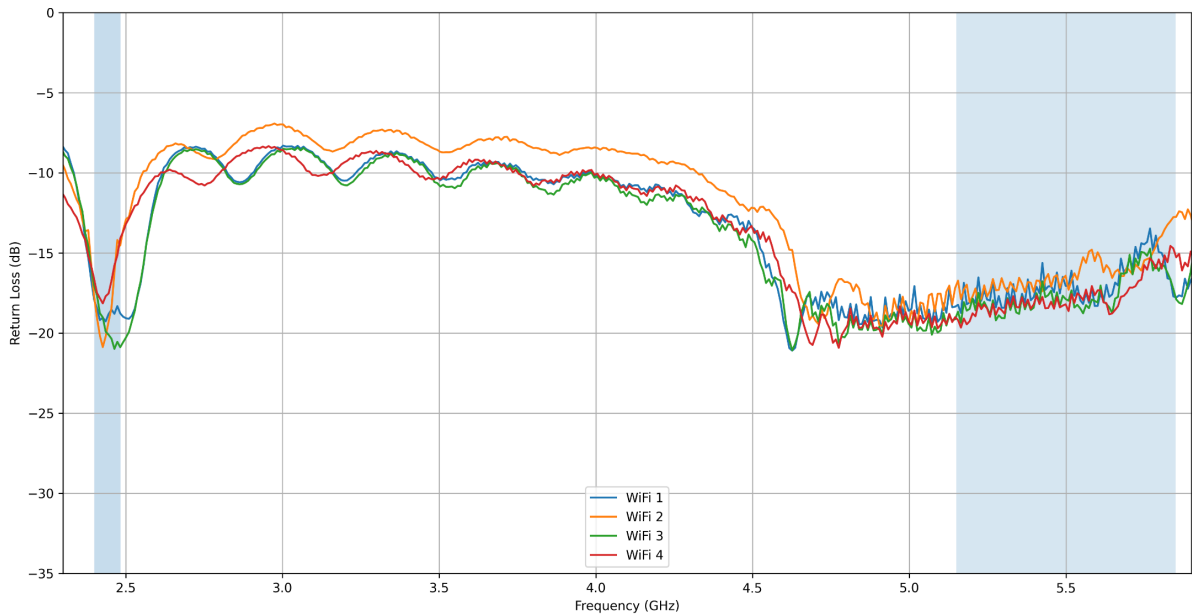


Subject to change without prior notice.




## 3D Radiation Pattern


820MHz

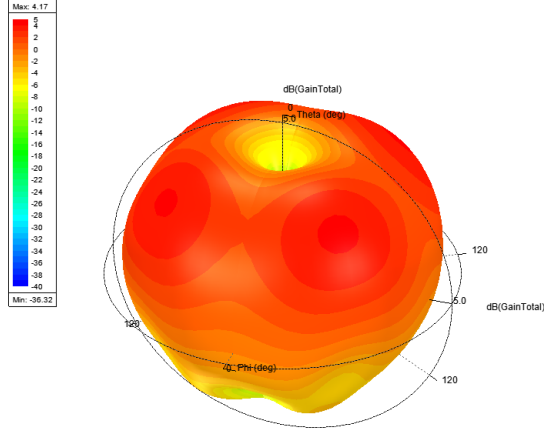


1820MHz

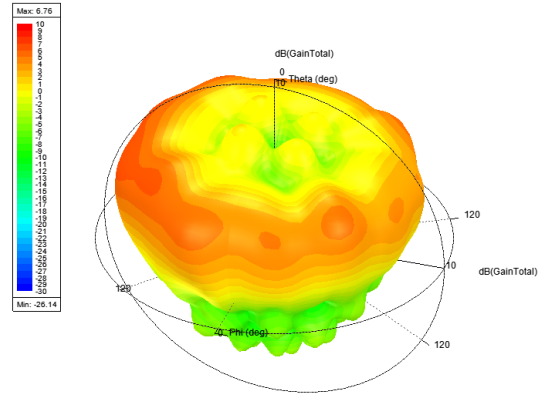


2140MHz

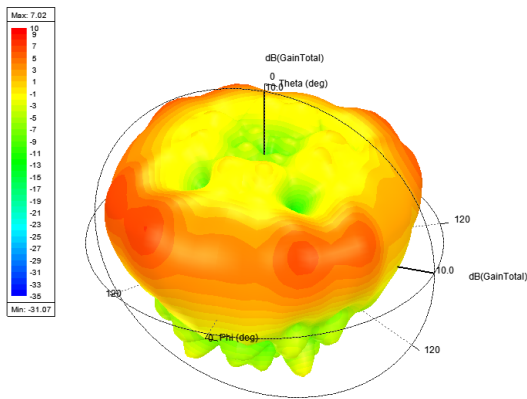

2600MHz

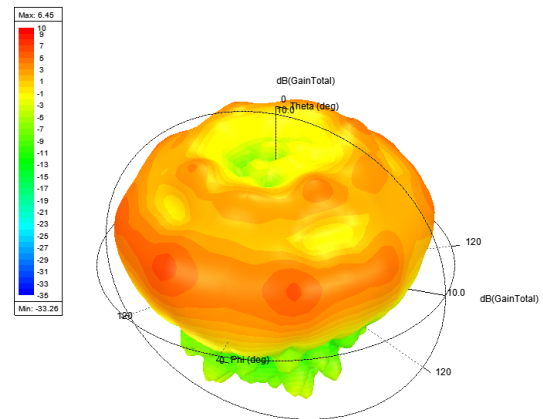

3600MHz

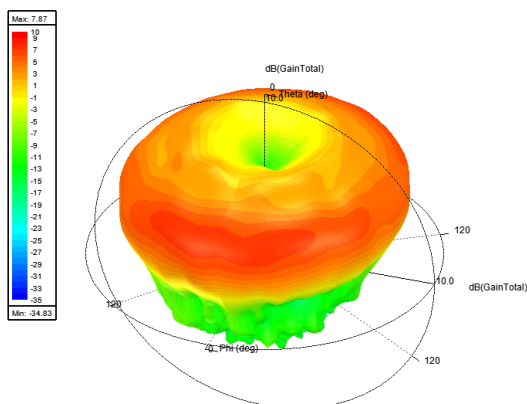

Subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom  
 Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 363 7377 | E. [sales@sure-antennas.com](mailto:sales@sure-antennas.com)

A brand of



[www.sure-antennas.com](http://www.sure-antennas.com)