


SK0200180 'Mallard' 4-in-1 Antenna Black incl. 5m Coax Cables

SureAntennas®

**5 YEARS
WARRANTY**

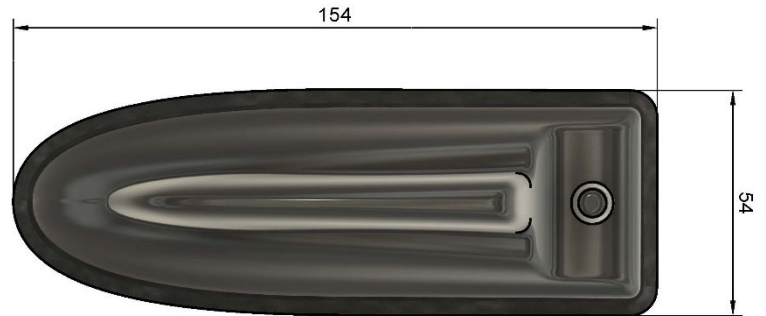

The '**Mallard**' is a low-profile, multifunction antenna designed to **future-proof** blue-light and amber-light vehicle fleets, delivering **up to 9 functions** within a single, panel-mounted unit. This variant incorporates **4 functions**.

With market leading isolation to **support ESN**, as well as your current **TETRA radio**, there is no need to drill multiple holes into your vehicle's roof due to **additional fitting kit options**.

The '**Mallard**' supports **2x2 MiMo from 698MHz to 6GHz** with a minimum **4dBi gain** across the whole band. With the additional functionality of **4x4 MiMo 2.4/5.8GHz Wi-Fi function**, **2x GPS/GNSS Ports**, this antenna would be an ideal solution for future proofing your new vehicle installations for **ESN**.

With a single hole installation and a **wide frequency bandwidth** on offer, this antenna would help **reduce installation costs** and protect your vehicles resale value. For **other available cable options**, please contact us.

Also Available in White: Part No. SK0200240



Part No.	Cable Kit Options
SK020401	Product Kit : Black 4 in 1 Mallard Antenna & 5m Coax Ext Cable Kit : CM Specialist : Terminated Cables

Additional options available upon request.

www.sure-antennas.com

A brand of



A MEMBER OF



MOBILE RADIO

SK0200180 'Mallard' 4-in-1 Antenna Black incl. 5m Coax Cables

Technical Specifications

Part No.	SK0200180
Electrical Data	Wi-Fi
Frequency Range (MHz)	2.4 GHz & 5.8GHz
Band	4x4 MiMo Dual Band WiFi
VSWR	<2.1:1 TYPICALLY 1.5:1
Gain	Minimum 4dBi
Isolation	<-25dB
Polarisation	Vertical
Pattern	Omni-directional
Impedance	50Ω
Max Power Input (W)	10W
Mechanical Data	
Dimensions (mm)	H80xW70xL230
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)
Material	ABS/PC
Colour	Black
Weight (g)	310
Ingress Protection	IP66
Cable Data	
Cable Type	RG316
length	200mm
Diameter	2.8
Termination	SMA (m) Reverse Polarity
Mounting Data	
Mounting Type	Panel mount
Mounting Hole (mm)	15mm
Max Panel Thickness (mm)	10mm


Subject to change without prior notice.

SK0200180 'Mallard' 4-in-1 Antenna Black incl. 5m Coax Cables


Supplied Coax Extension Cables

Coax Cables	4x Wi-Fi
Cable Type	SBC240
length	5m or 3m
Diameter (mm)	6.1
Min. Bend Radius (mm)	30
Operating Temp. °C	-40-80
Termination	SMA Reverse Polarity (m)
Labeling	Wi-Fi M & Wi-Fi A

Cable Diagram

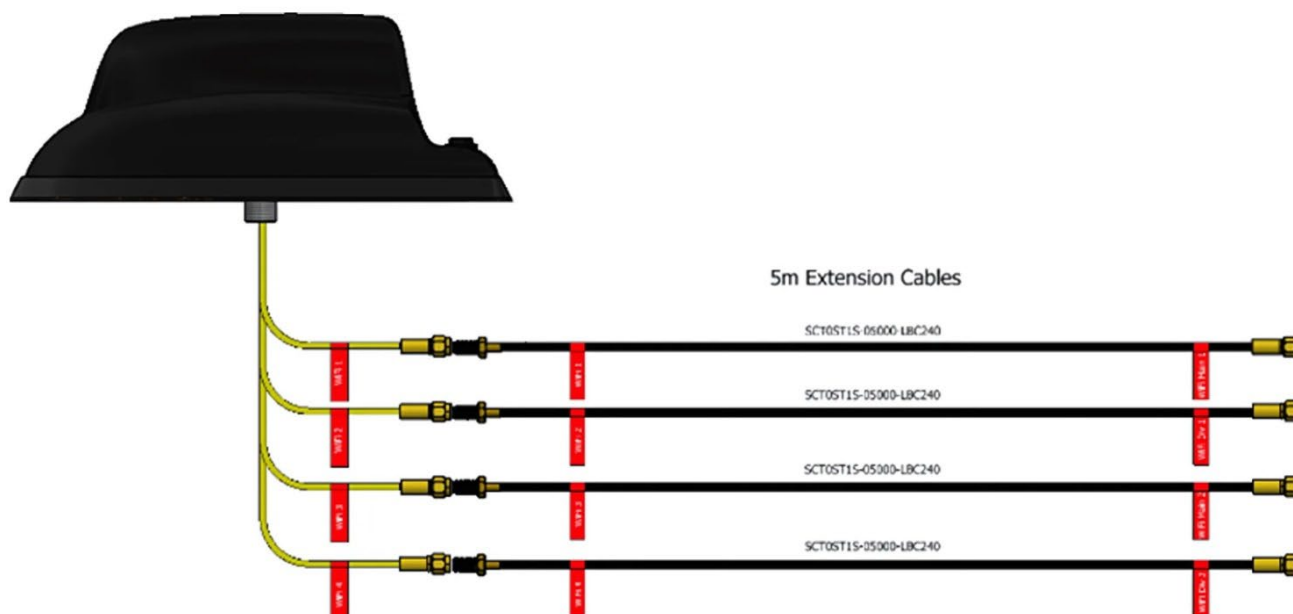


Wi-Fi VSWR Plot

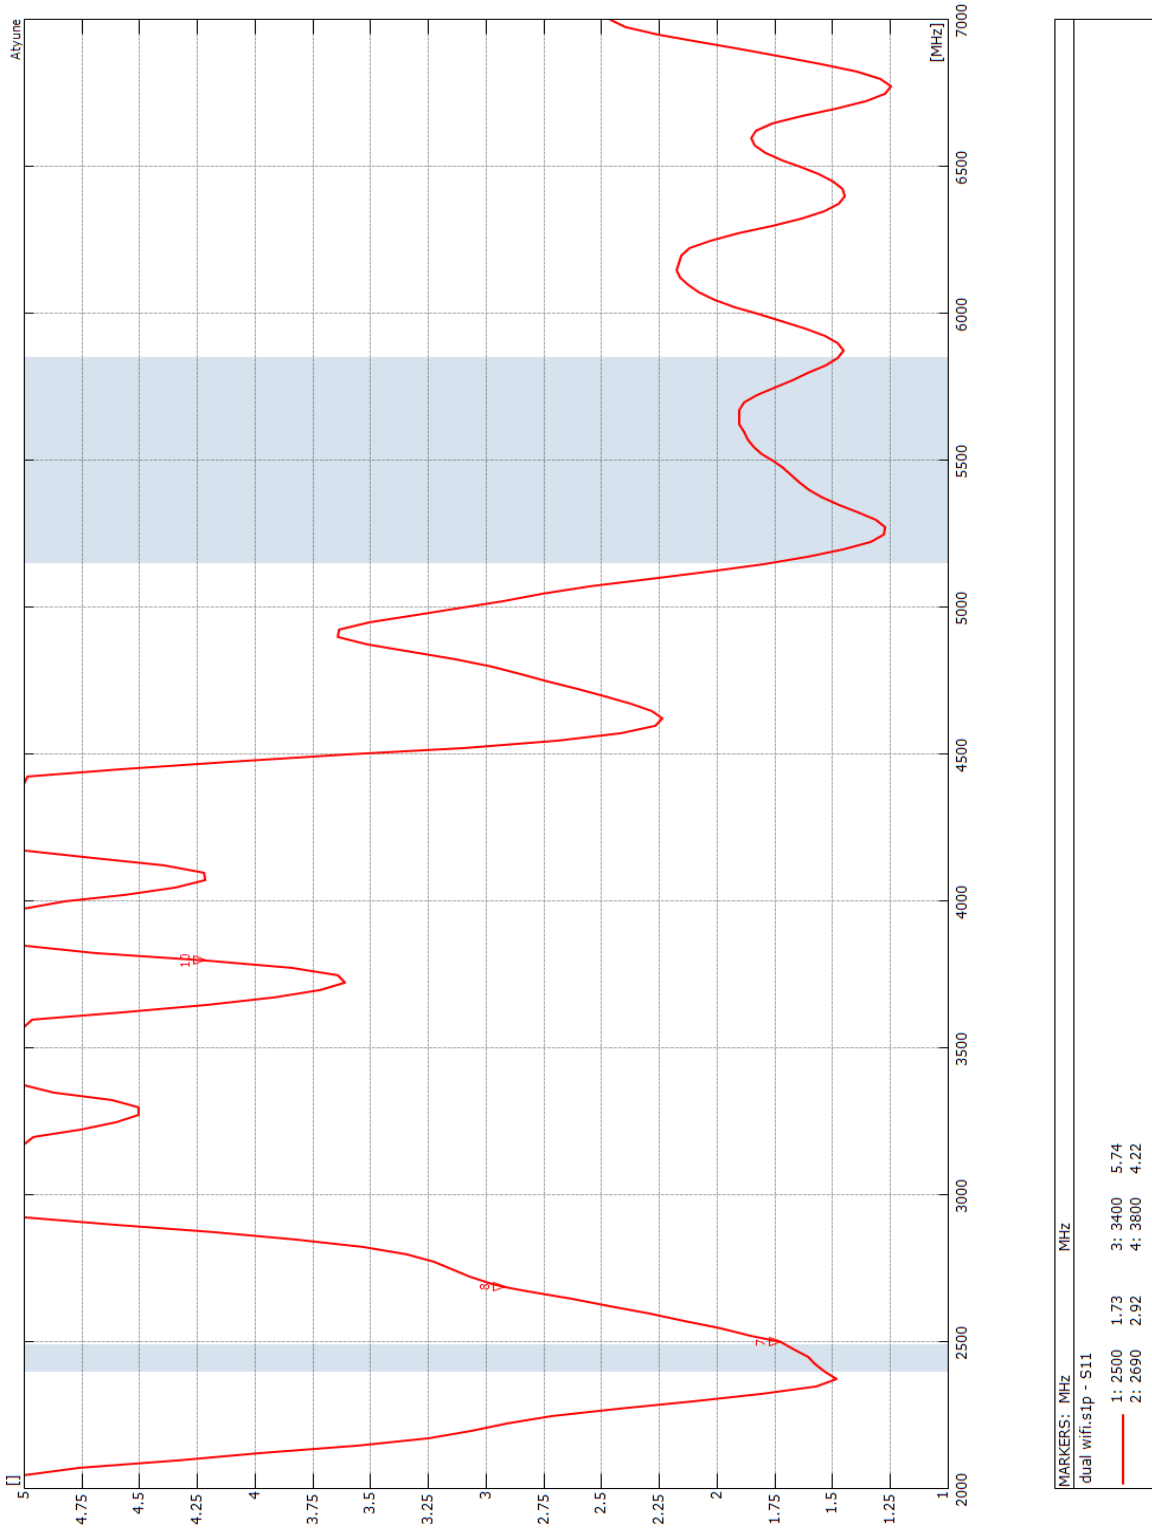


Subject to change without prior notice.

Antenna 3D Gain Plots


820MHz

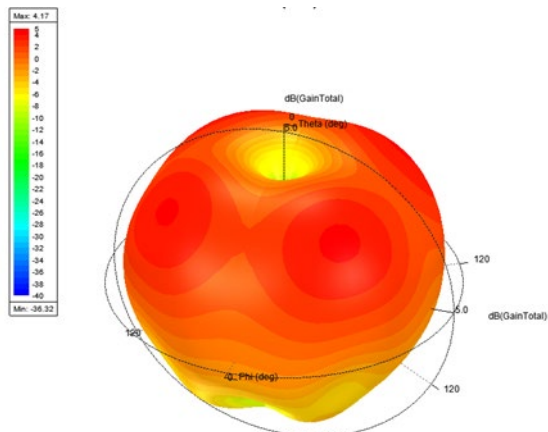


1820MHz

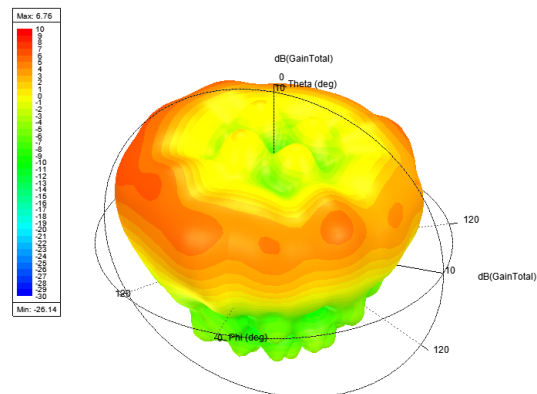


2140MHz

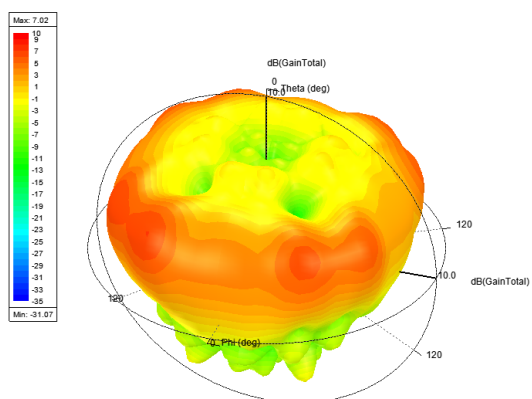

2600MHz

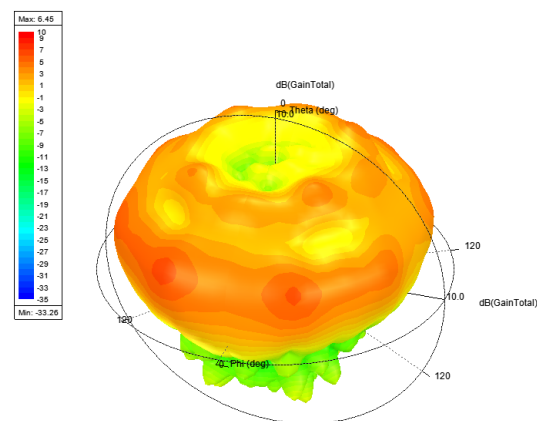

3600MHz

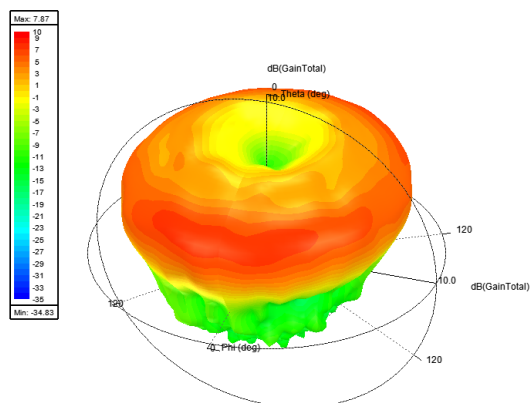

Subject to change without prior notice.

SK0200180 'Mallard' 4-in-1 Antenna Black
incl. 5m Coax Cables

SureAntennas®

www.sure-antennas.com

A brand of



MOBILE RADIO



A MEMBER OF

