


SK0200160 'Mallard' 2-in-1 Antenna Black incl. 5m Coax Cables

SureAntennas®

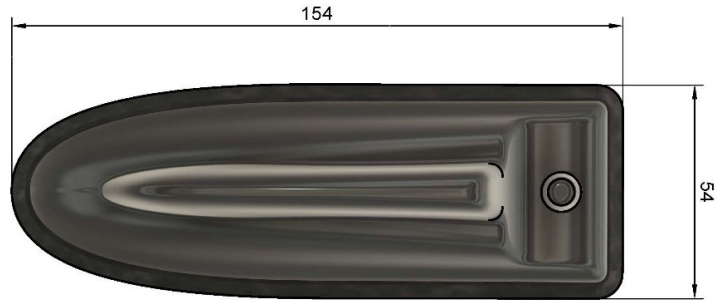

The '**Mallard**' is a low-profile, multifunction antenna designed to **future-proof** blue-light and amber-light vehicle fleets, delivering **up to 9 functions** within a single, panel-mounted unit. This variant features **2 functions**.

With market leading isolation to **support ESN**, as well as your current **TETRA radio**, there is no need to drill multiple holes into your vehicle's roof due to **additional fitting kit options**.

The 'Mallard' supports **2x2 MiMo from 698MHz to 6GHz** with a minimum **4dBi gain** across the whole band. With the additional functionality of **4x4 MiMo 2.4/5.8GHz Wi-Fi function**, **2x GPS/GNSS Ports**, and **TETRA**, this antenna would be an ideal solution for future proofing your new vehicle installations for **ESN**.

With a single hole installation and a **wide frequency bandwidth** on offer, this antenna would help **reduce installation costs** and protect your vehicles resale value. For **other available cable options**, please contact us.

Also Available in White: Part No. SK0200220



Part No.

SK0200170

Cable Kit Options

Product Kit : Black 2 in 1 Mallard Antenna & 5m Coax Ext Cable Kit : Terminated Cables

Additional options available upon request.

A brand of



www.sure-antennas.com

SK0200160 'Mallard' 2-in-1 Antenna Black incl. 5m Coax Cables

Technical Specifications

Part No.	SK0200160
Electrical Data	2G 3G 4G 5G
Frequency Range (MHz)	698-6000 MHz
Band	2x2 MiMo 2G 3G 4G 5G
VSWR	<2.1:1 TYPICALLY 1.5:1
Gain	Minimum 4dBi
Isolation	<-25dB
Polarisation	Vertical
Pattern	Omni-directional
Impedance	50Ω
Max Power Input (W)	10W
Mechanical Data	
Dimensions (mm)	H80xW70xL230
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)
Material	ABS/PC
Colour	Black
Weight (g)	310
Ingress Protection	IP66
Cable Data	
Cable Type	RG316
length	160mm
Diameter	2.8
Termination	SMA (f)
Mounting Data	
Mounting Type	Panel mount
Mounting Hole (mm)	15mm
Max Panel Thickness (mm)	10mm

Subject to change without prior notice.

SK0200160 'Mallard' 2-in-1 Antenna
Black incl. 5m Coax Cables



Supplied Coax Extension Cables

Coax Cables	2x LTE
Cable Type	SBC240
length	5m or 3m
Diameter (mm)	6.1
Min. Bend Radius (mm)	30
Operating Temp. °C	-40-80
Termination	SMA (m)
Labeling	LTE M & LTE A


A brand of




www.sure-antennas.com




LTE Isolation

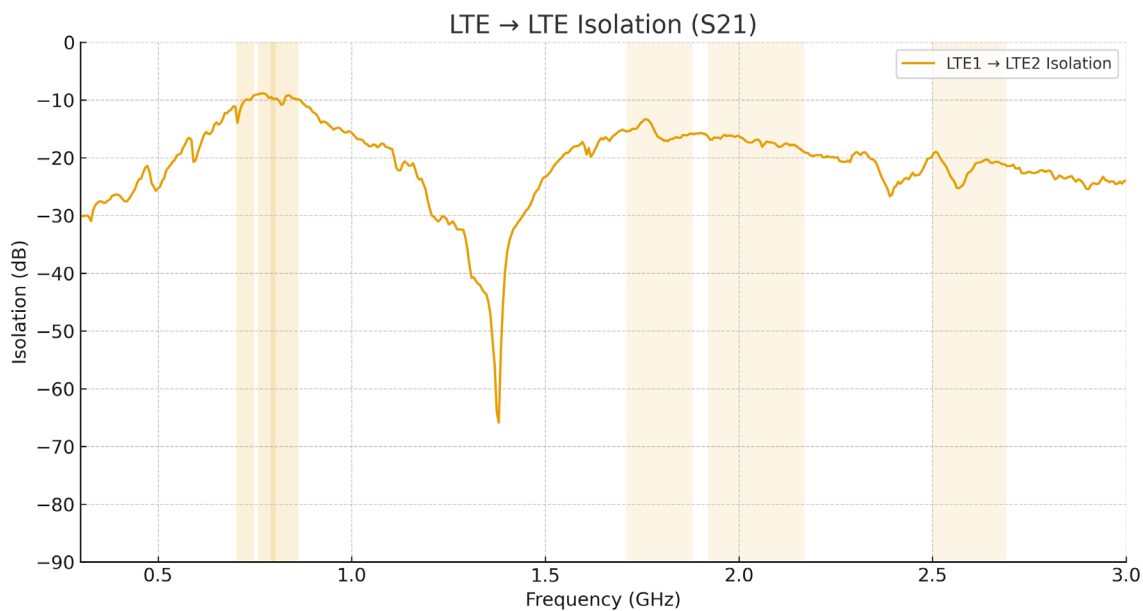

LTE Port Mismatch Efficiency

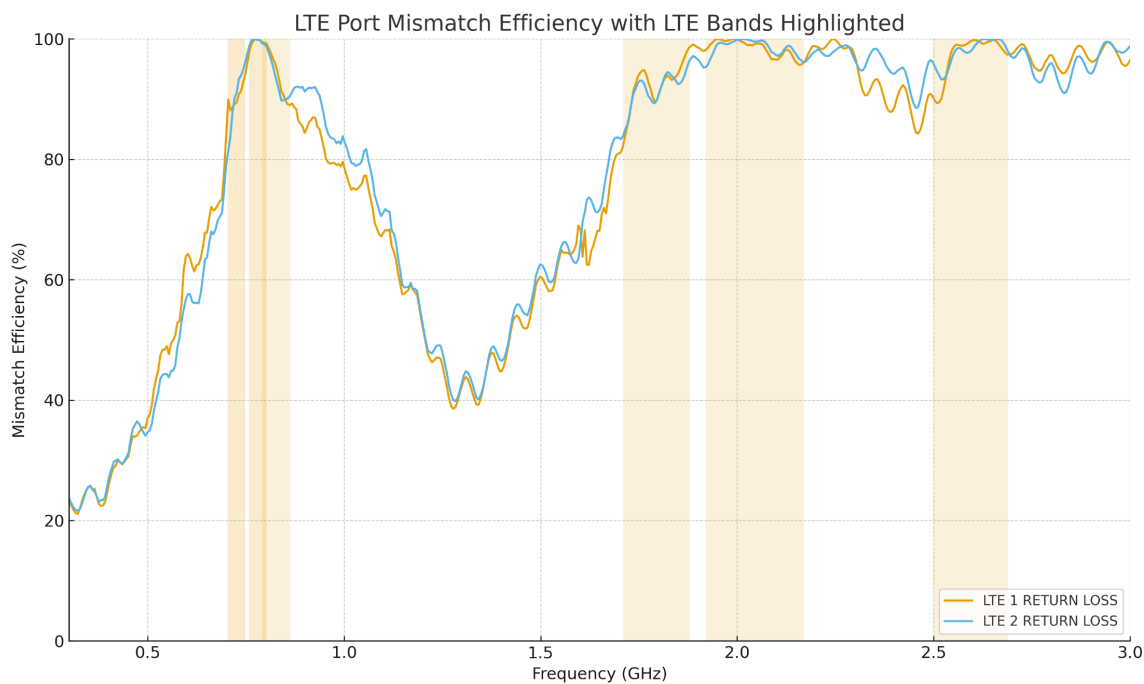


LTE Return Loss

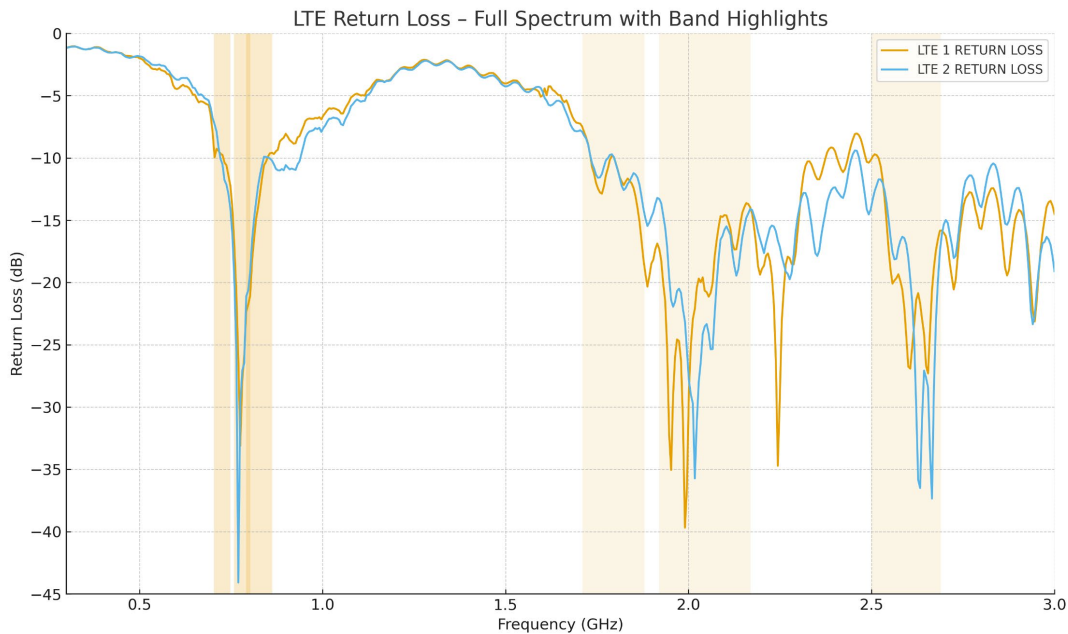


SK0200160 'Mallard' 2-in-1 Antenna Black incl. 5m Coax Cables

Antenna 3D Gain Plots


820MHz

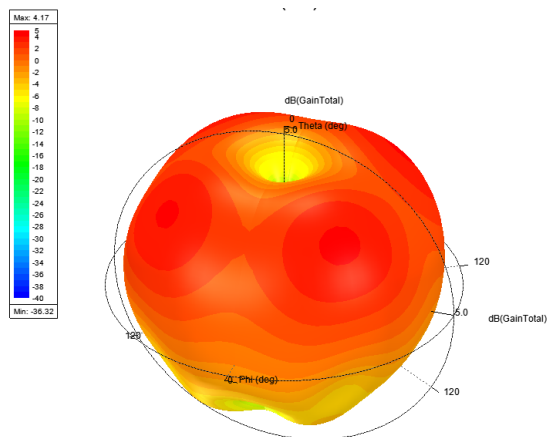


1820MHz

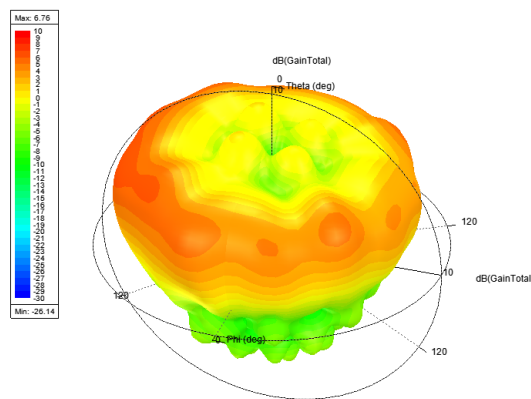


2140MHz

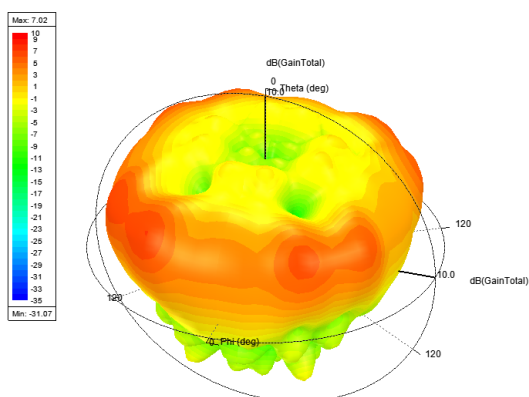

2600MHz

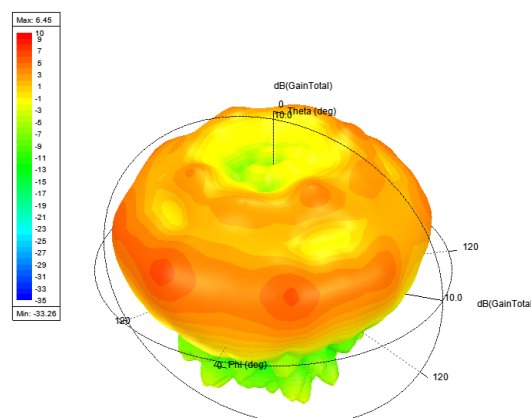

3600MHz

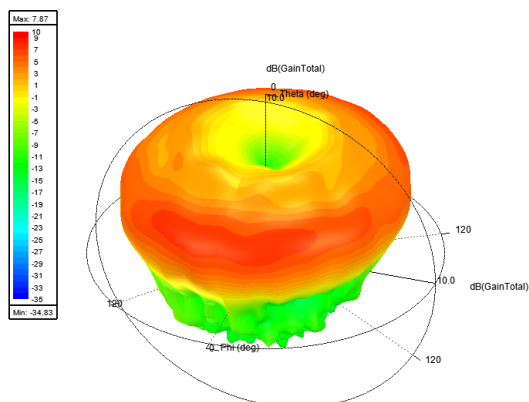

All graphs & diagrams subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom
Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 363 7377 | E. sales@sure-antennas.com

A brand of



www.sure-antennas.com

