


# SK0200270 'Mallard' 5-in-1 Antenna Black incl. 5m Coax Cables - TETRA

SureAntennas®

**5 YEARS  
WARRANTY**

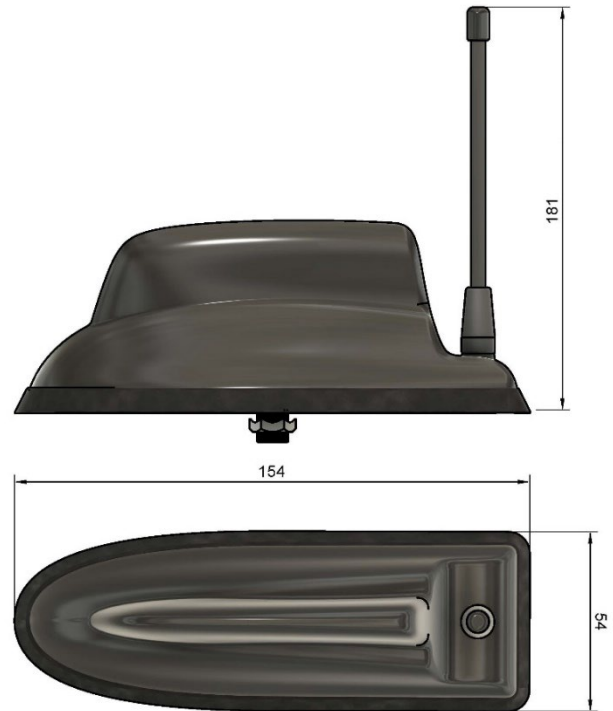

The 'Mallard' is a low-profile, multifunction antenna designed to **future-proof** blue-light and amber-light vehicle fleets, delivering **up to 9 functions** within a single, panel-mounted unit. This variant features **5 functions**.

With market leading isolation to **support ESN**, as well as your current **TETRA radio**, there is no need to drill multiple holes into your vehicle's roof due to **additional fitting kit options**.

The 'Mallard' supports **2x2 MiMo from 698MHz to 6GHz** with a minimum **4dBi gain** across the whole band. With the additional functionality of **4x4 MiMo 2.4/5.8GHz Wi-Fi function**, **2x GPS/GNSS Ports**, and **TETRA**, this antenna would be an ideal solution for future proofing your new vehicle installations for **ESN**.

With a single hole installation and a **wide frequency bandwidth** on offer, this antenna would help **reduce installation costs** and protect your vehicles resale value. For **other available cable options**, please contact us.

**Also Available in White: Part No. SK0200330**



Part No.	Cable Kit Options
SK0200140	Product Kit : Mallard 5 in 1 Antenna : Black : Inc 5m Low Loss Coax Extension Cables - Terminated
SK0200142	Product Kit : Mallard 5 in 1 Antenna : Black : Inc 3m Low Loss Coax Extension Cables - Terminated

Additional options available upon request.

A brand of **SFL**

[www.sure-antennas.com](http://www.sure-antennas.com)



# SK0200270 'Mallard' 5-in-1 Antenna Black incl. 5m Coax Cables - TETRA

## Technical Specifications

Part No.	SK0200270	
Electrical Data	TETRA	2G 3G 4G 5G
Frequency Range (MHz)	380 - 430 MHz	698-6000 MHz
Band	TETRA	2x2 MiMo 2G 3G 4G 5G
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi
Isolation	-	<-25dB
Polarisation	Vertical	Vertical
Pattern	Omni-directional	Omni-directional
Impedance	50Ω	50Ω
Max Power Input (W)	25W	10W
GPS/GLONASS		
Frequency Range (MHz)	1562-1612	
VSWR	<2:1	
Gain	26dB	
Polarisation	Right Hand Circular	
Operating Voltage	3-5v DC (fed via coax)	
Cable	2x 230mm RG316 Terminated to SMA (m)	
Mechanical Data		
Dimensions (mm)	H80xW70xL230 *	
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)	
Material	ABS/PC	
Colour	Black	
Weight (g)	310	
Ingress Protection	IP66	
Cable Data		
Cable Type	RG316	RG316
length	280mm	160mm
Diameter	2.8	2.8
Termination	TNC (f)	SMA (f)
Mounting Data		
Mounting Type	Panel mount	
Mounting Hole (mm)	15mm	
Max Panel Thickness (mm)	10mm	


Subject to change without prior notice. \*Excluding external antenna

# SK0200270 'Mallard' 5-in-1 Antenna Black incl. 5m Coax Cables - TETRA


## Supplied Coax Extension Cables

Coax Cables	2x LTE	1x GPS	1x TETRA	1x GPS
Cable Type	SBC240	SBC100	SBC195	SBC100
length	5m or 3m	5m or 3m	5m or 3m	5m or 3m
Diameter (mm)	6.1	2.8	4.95	2.8
Min. Bend Radius (mm)	30	14	25	14
Operating Temp. °C	-40-80	-40-80	-40-80	-40-80
Termination	SMA (m)	SMA (m)	BNC (m)	SMA (m) – Motorola and Sepura adaptors supplied.
Labeling	LTE M & LTE A	GPS	TETRA	GPS TETRA


## Cable Diagram

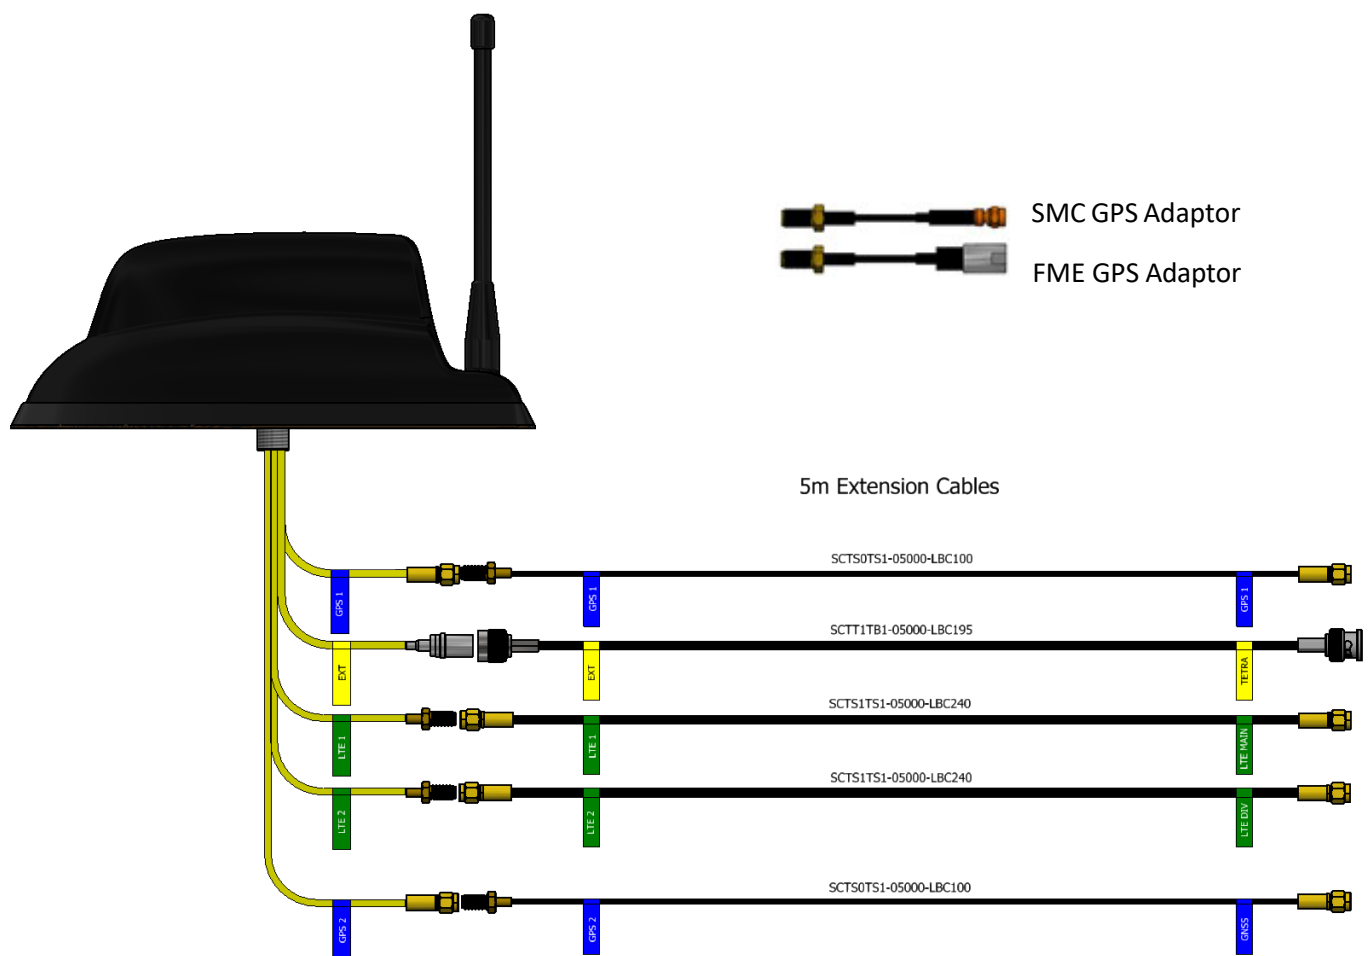


## LTE Isolation

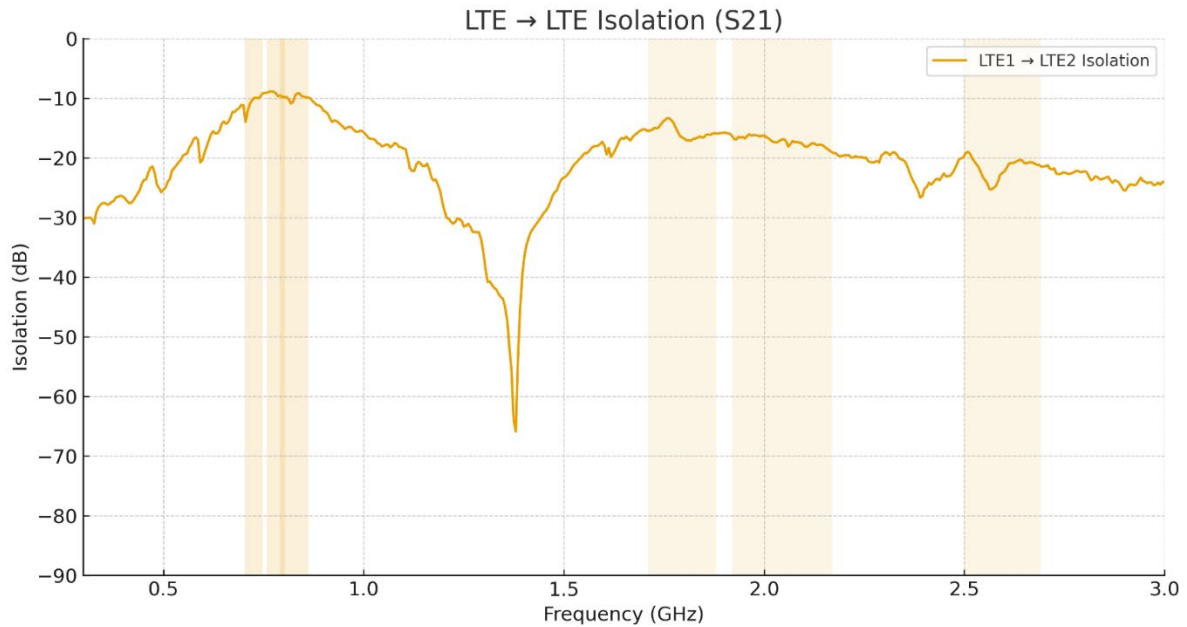


## LTE Port Mismatch Efficiency

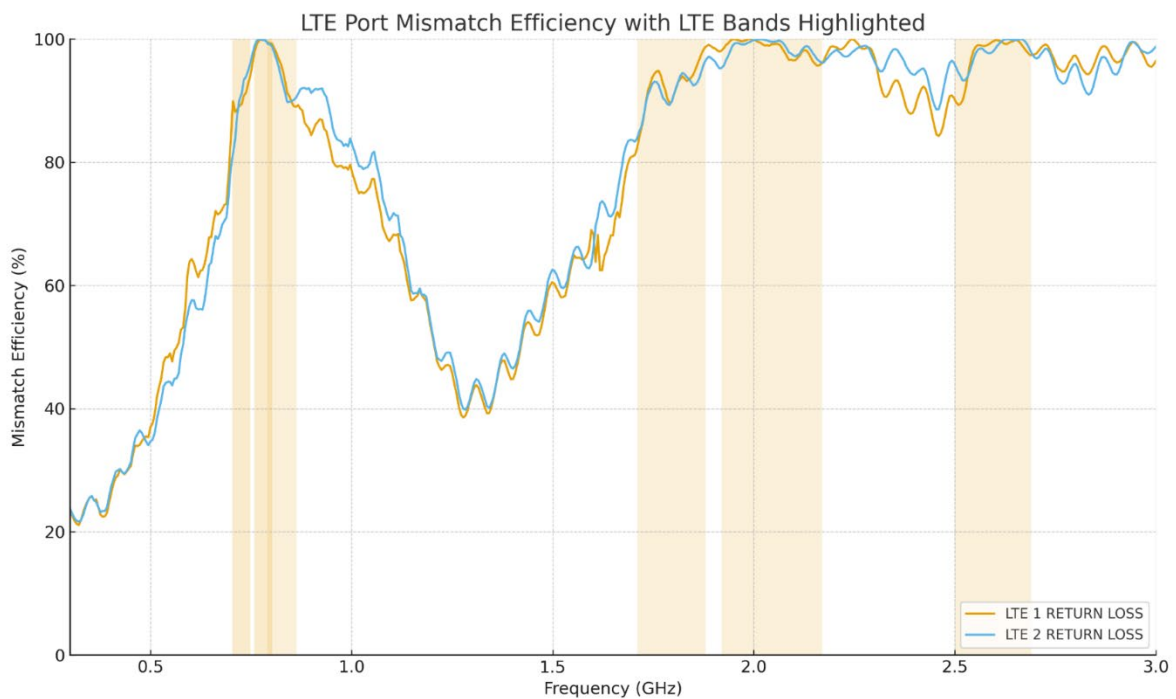

## LTE Return Loss

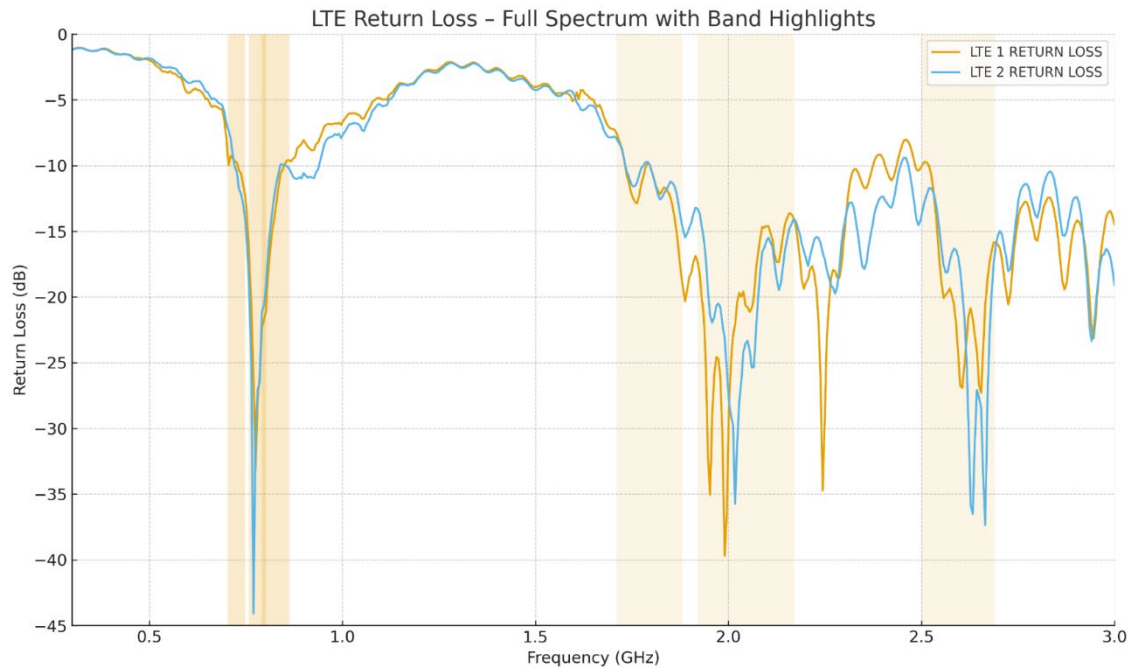

## TETRA to LTE/Wi-Fi Isolation

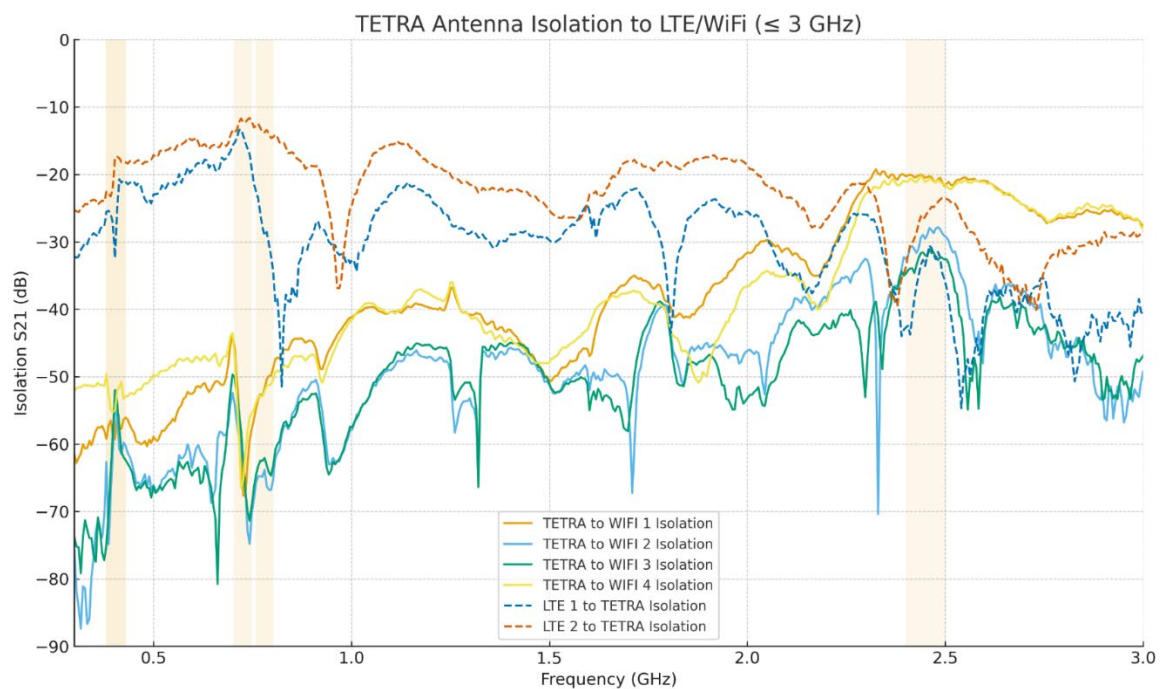







# SK0200270 'Mallard' 5-in-1 Antenna Black incl. 5m Coax Cables - TETRA

## Antenna 3D Gain Plots


**820MHz**

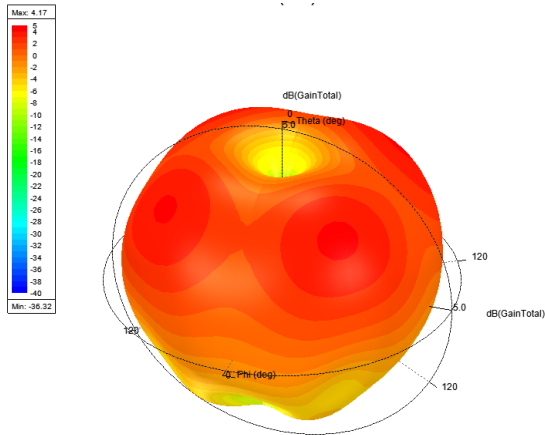


**1820MHz**

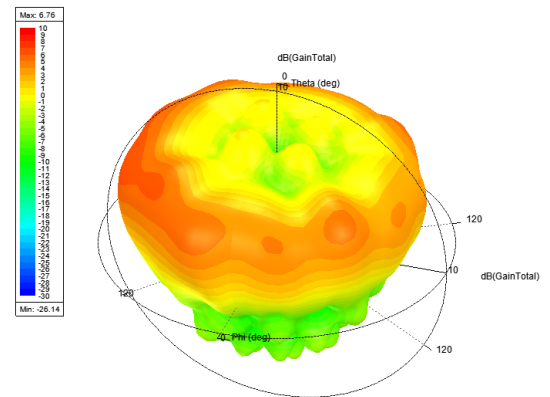


**2140MHz**

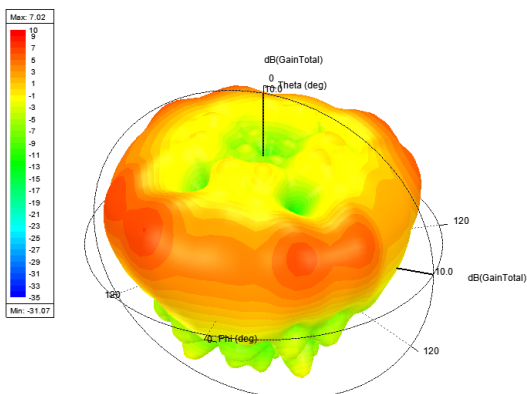

**2600MHz**

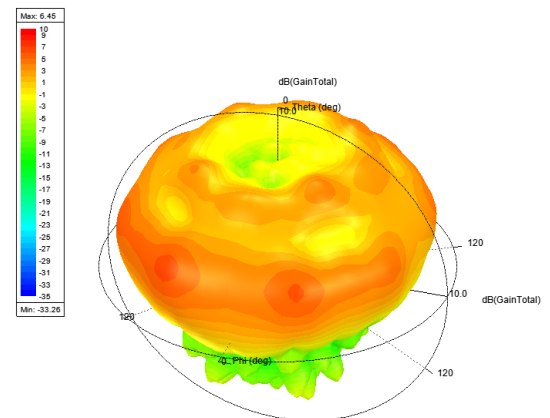

**3600MHz**

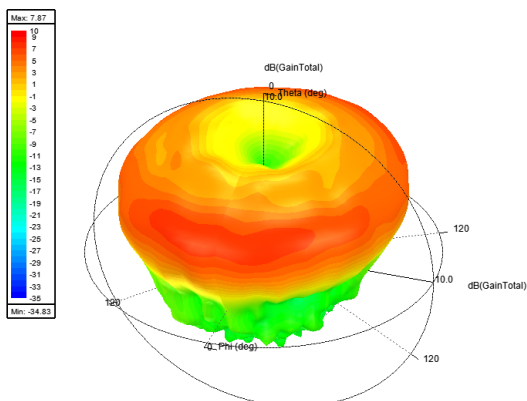

All graphs & diagrams subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom  
Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 363 7377 | E. [sales@sure-antennas.com](mailto:sales@sure-antennas.com)