

7000-308 'Mallard' 8-in-1 Antenna Black incl. TETRA

5 YEARS WARRANTY



The 'Mallard' is a low-profile, multifunction antenna designed for blue-light and amber-light vehicle fleets, combining up to 9 functions within a single panel-mounted unit. With optional fitting kits, the 'Mallard' can be installed using the existing OEM mounting hole, preventing the need to drill additional holes and maintaining OEM functions.

This variant supports **8 Functions** including **TETRA, 2x LTE, 2x GPS and 3x WiFi**

Also Available in White: Part No. 7000-208



Part No.	Cable Kit Options
SK0200106	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 6m Low Loss Coax Cables SMA five port Router & Airwave Radio
SK0200105	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 5m Low Loss Coax Cables SMA five port Router & Airwave Radio
SK0200103	BLACK 'Mallard' Shark Fin 8 in 1 Antenna : 2xLTE 2xGPS 3xWiFi 1xTETRA Inc 3m Low Loss Coax Cables SMA five port Router & Airwave Radio


Additional options available upon request.

Technical Specifications


Part No.	7000-308		
Electrical Data	TETRA	2G 3G 4G 5G	Wi-Fi
Frequency Range (MHz)	380 - 430 MHz	698-6000 MHz	2.4 GHz & 5.8GHz
Band	TETRA	2x2 MiMo 2G 3G 4G 5G	3x3 MiMo Dual Band Wi-Fi
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi	Minimum 4dBi
Isolation	-	<-25dB	<-25dB
Polarisation	Vertical	Vertical	Vertical
Pattern	Omni-directional	Omni-directional	Omni-directional
Impedance	50Ω	50Ω	50Ω
Max Power Input (W)	25W	10W	10W
GPS/GLONASS			
Frequency Range (MHz)	1562-1612		
VSWR	<2:1		
Gain	26dB		
Polarisation	Right Hand Circular		
Operating Voltage	3-5v DC (fed via coax)		
Cable	2x 230mm RG316 Terminated to SMA (m)		
Mechanical Data			
Dimensions (mm)	H80xW70xL230 *		
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)		
Material	ABS/PC		
Colour	Black		
Weight (g)	310		
Ingress Protection	IP66		
Cable Data			
Cable Type	RG316	RG316	RG316
length	280mm	160mm	200mm
Diameter	2.8	2.8	2.8
Termination	TNC (f)	SMA (f)	SMA (m) Reverse Polarity
Mounting Data			
Mounting Type	Panel mount		
Mounting Hole (mm)	15mm		
Max Panel Thickness (mm)	10mm		

Subject to change without prior notice. *Excluding external antenna


Cable Diagram

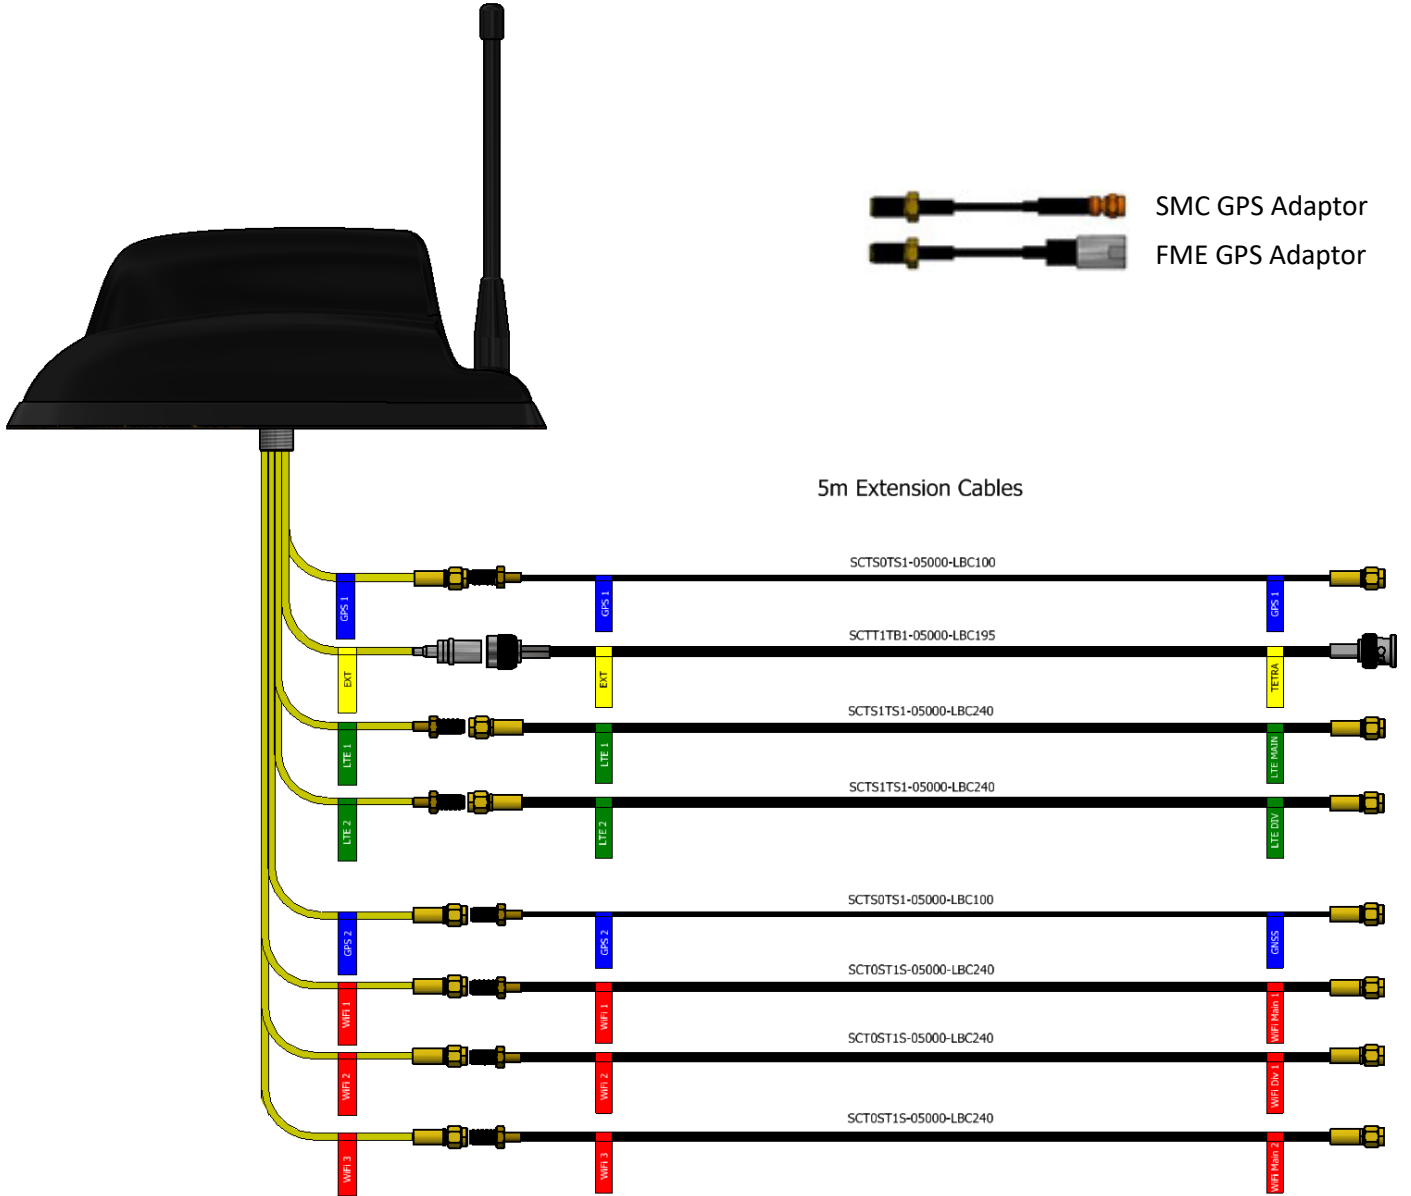


LTE Isolation

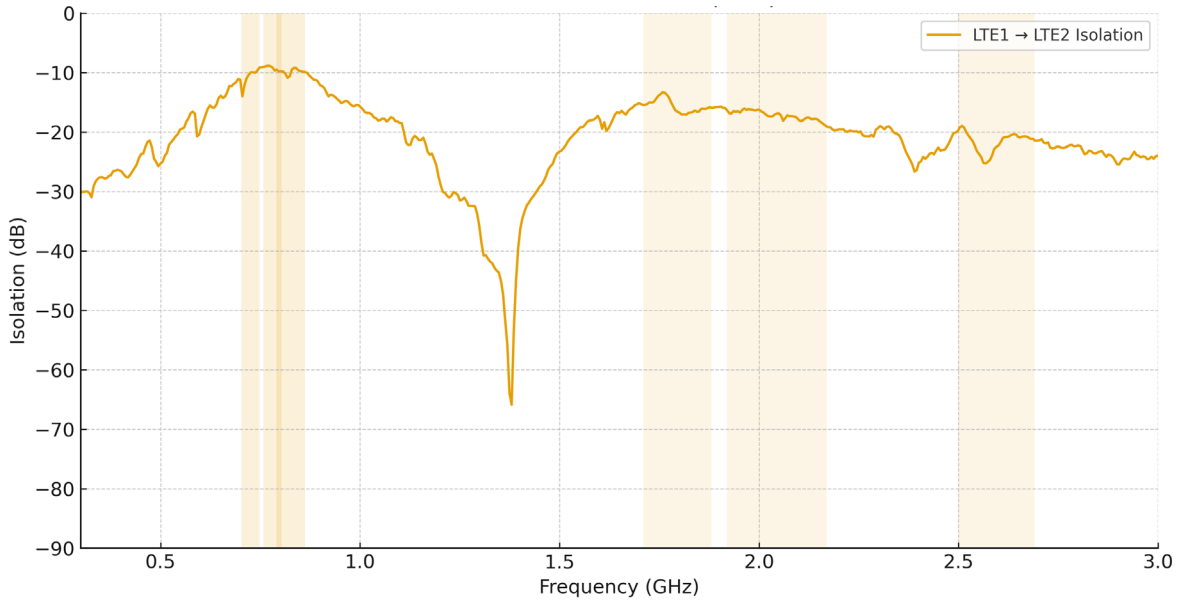


LTE Port Mismatch Efficiency

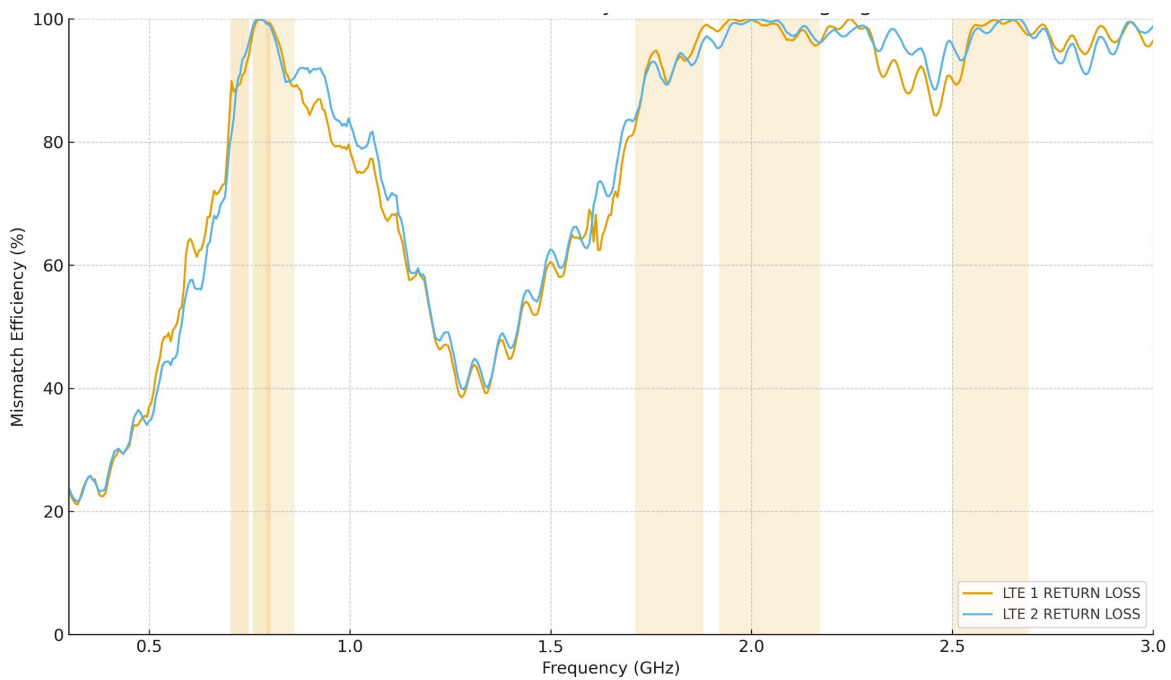


LTE Return Loss

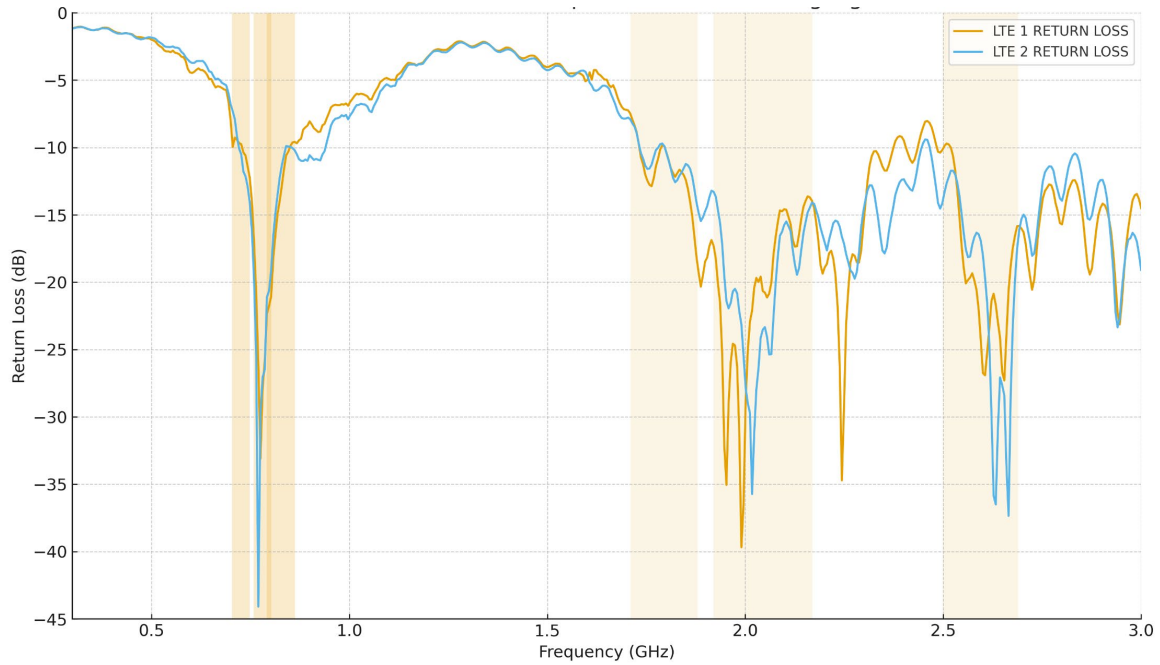


LTE to Wi-Fi Port Isolation

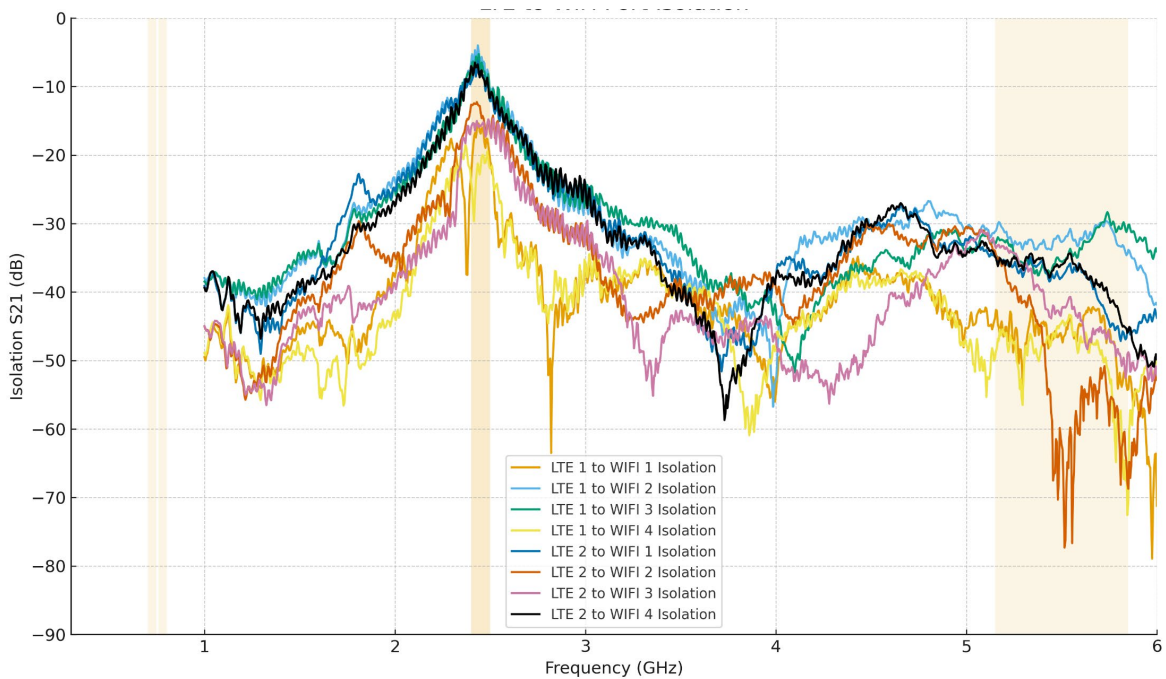


TETRA to LTE/Wi-Fi Isolation

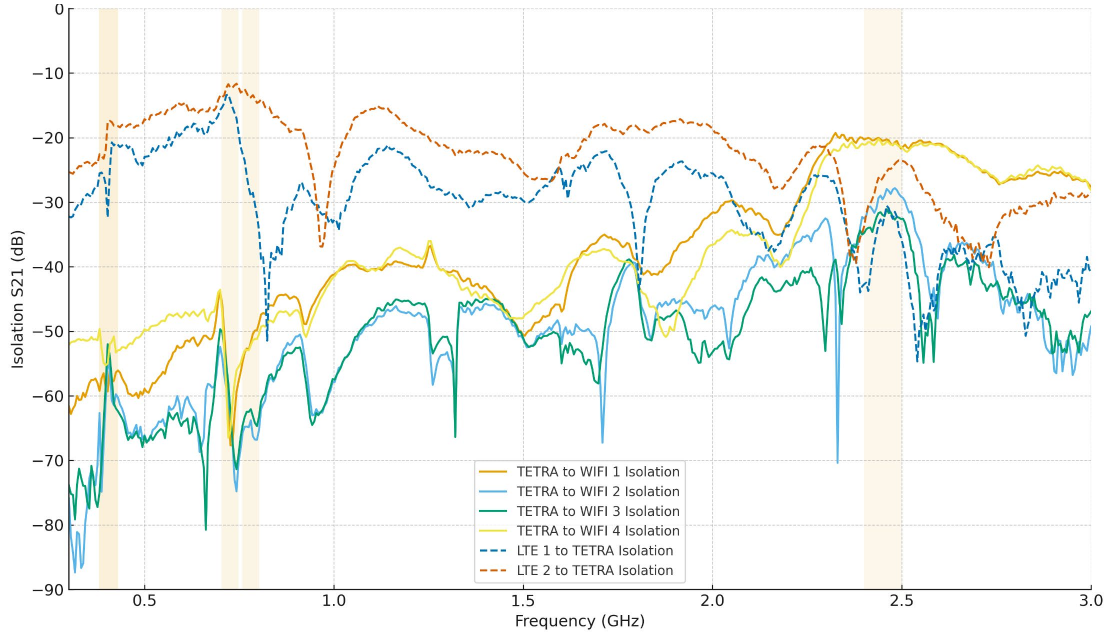


TETRA Port Mismatch Efficiency

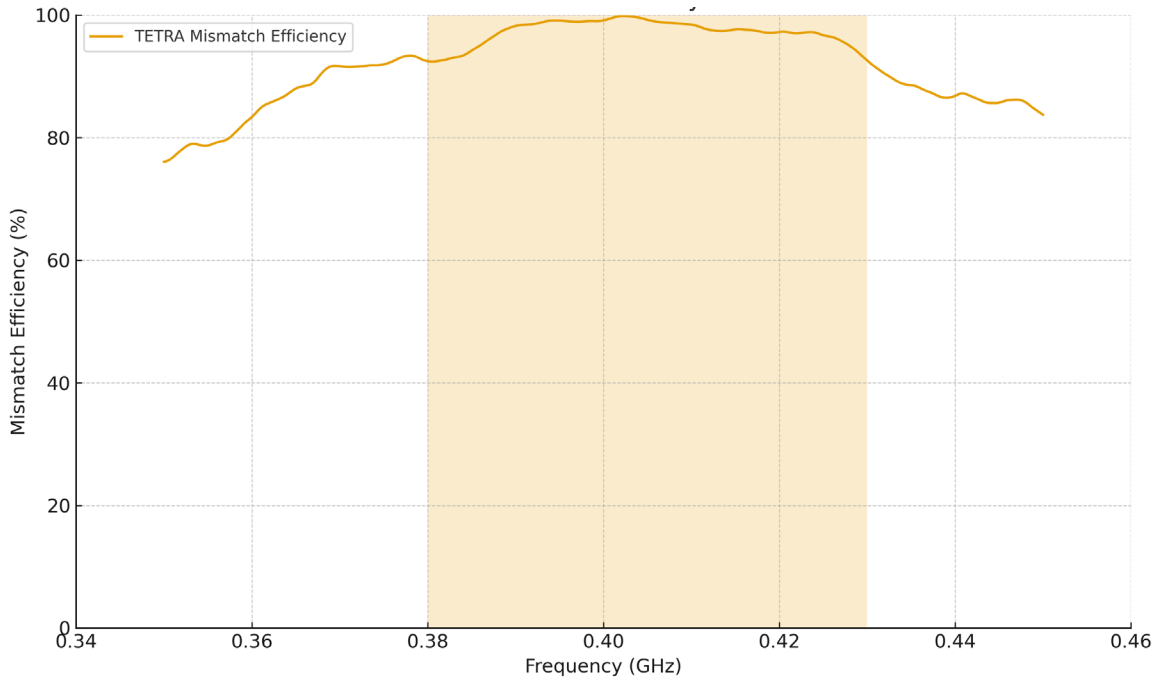


TETRA Port Return Loss

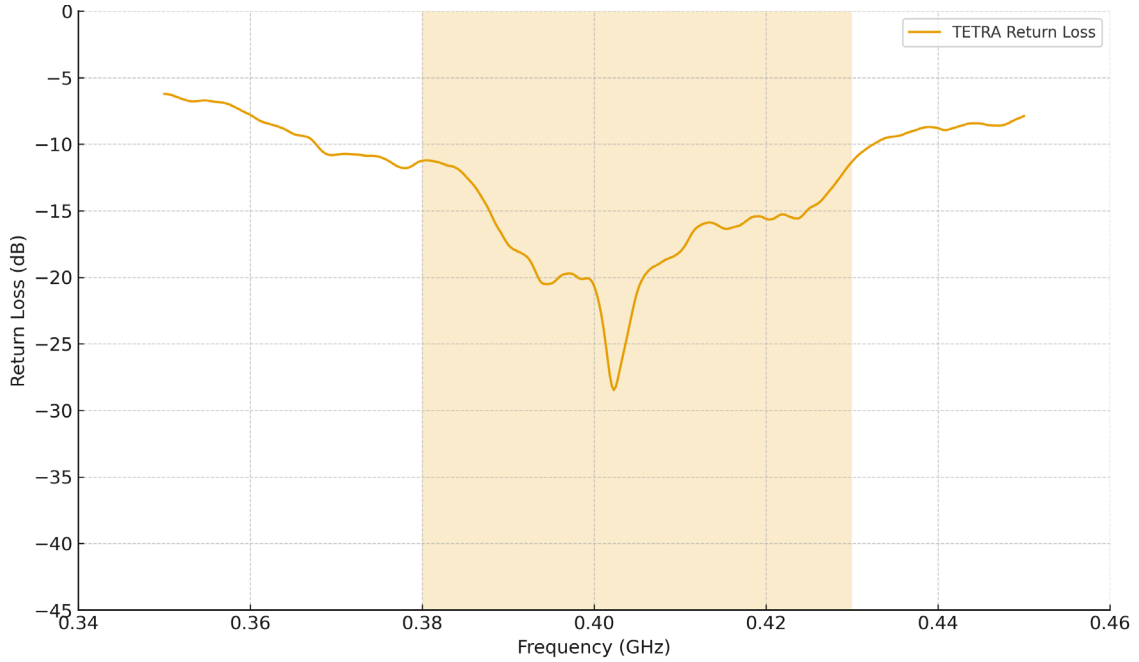


Wi-Fi Port Isolation

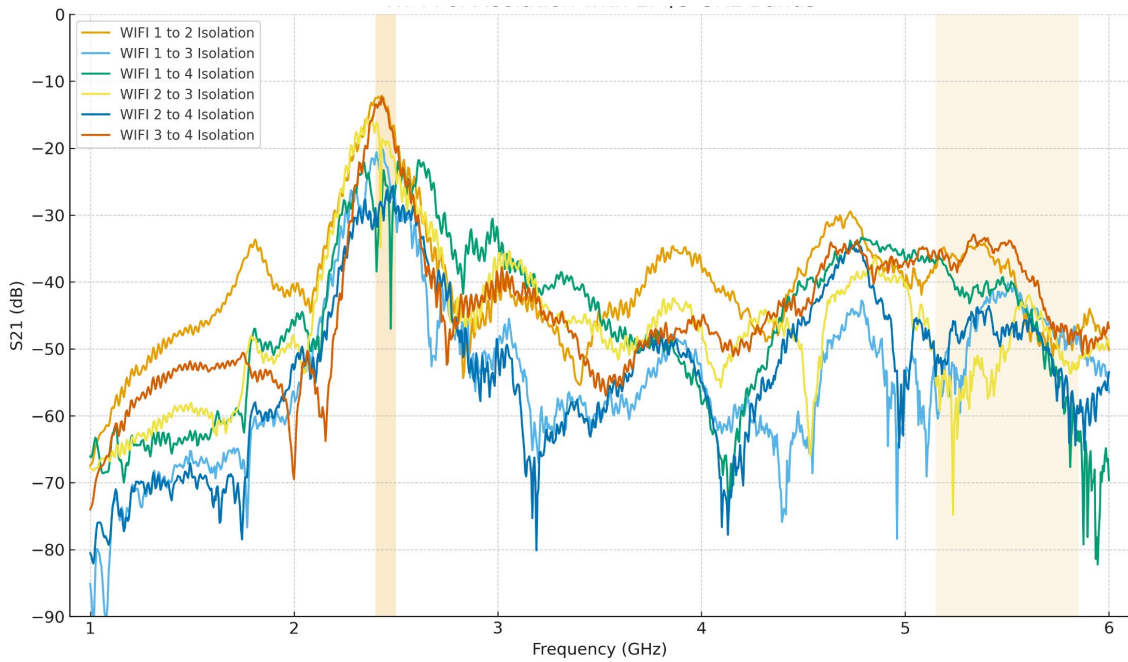

Wi-Fi Port Mismatch Efficiency

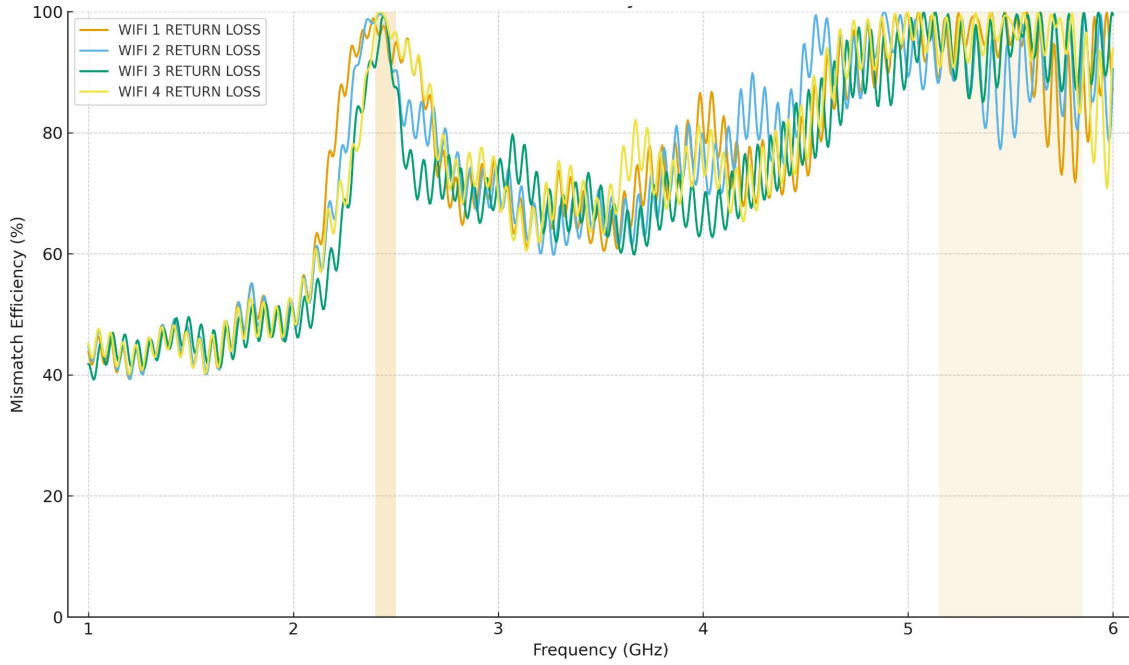


Wi-Fi Port Return Loss

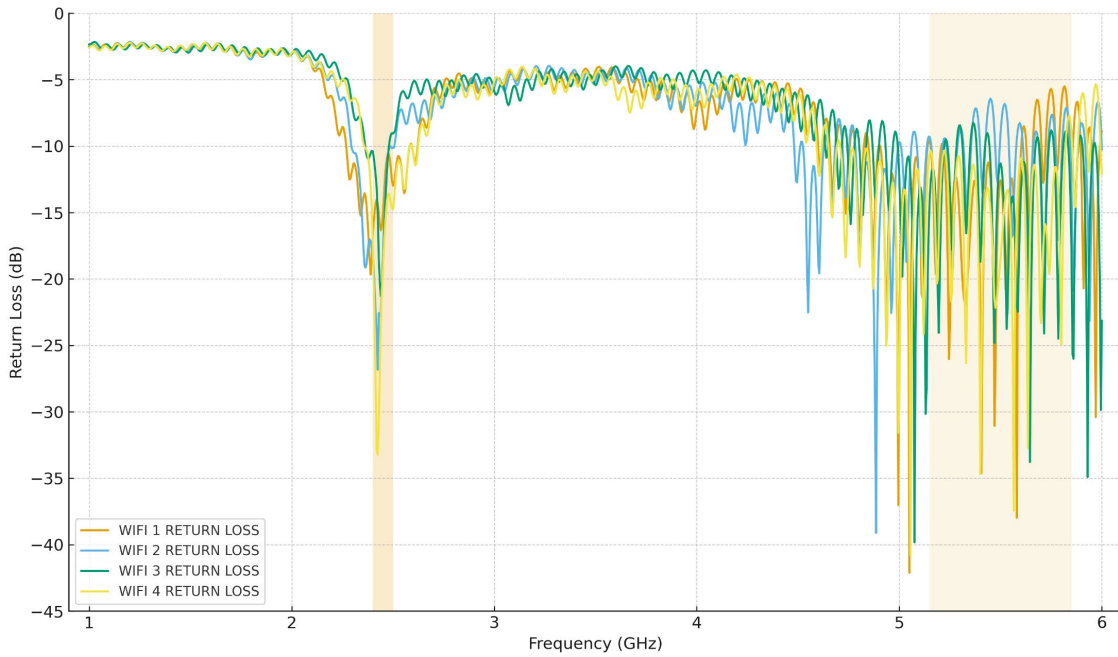


Antenna 3D Gain Plots


820MHz

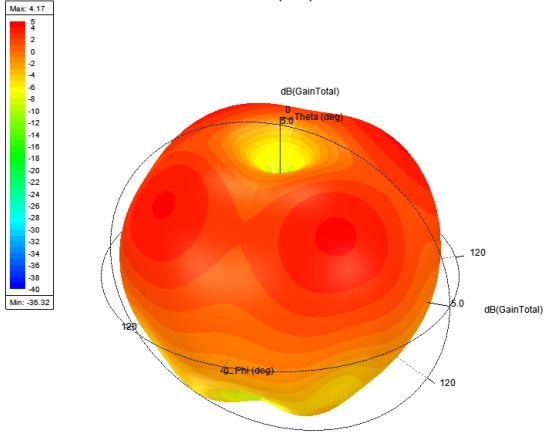


1820MHz

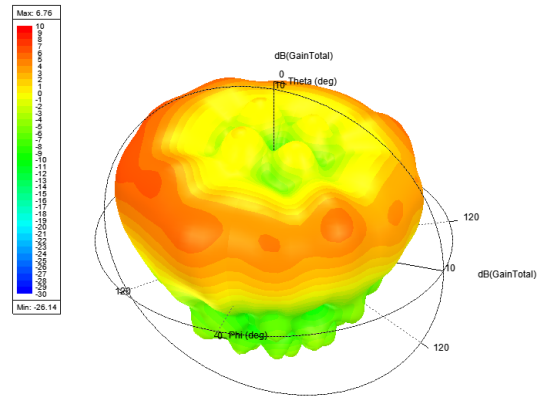


2140MHz

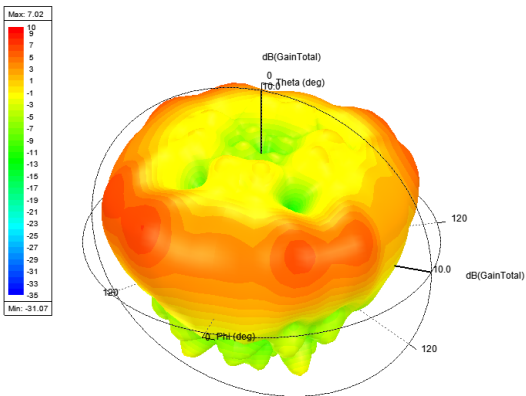

2600MHz

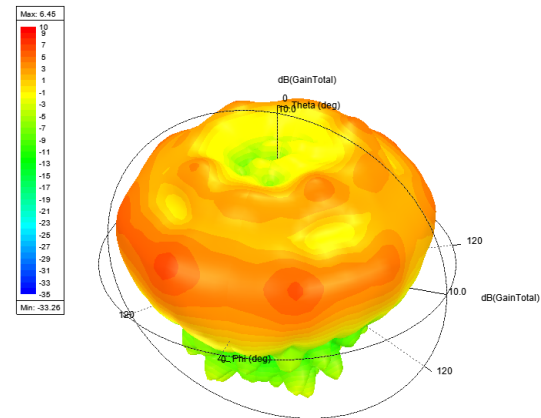

3600MHz

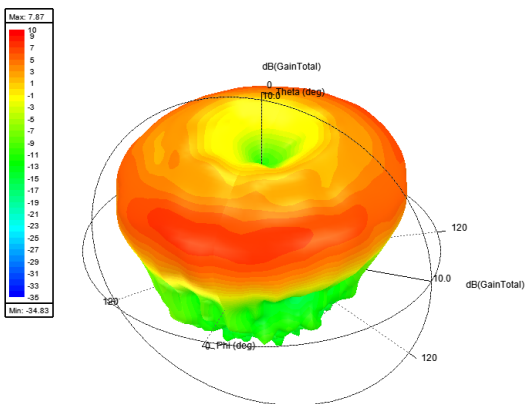

All graphs & diagrams subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom
 Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 363 7377 | E. sales@sure-antennas.com

