

8000-317 'Sandcastle' 13-in-1 Antenna Black incl. - TETRA

5 YEAR WARRANTY



The **'Sandcastle'** is a low-profile, multifunction antenna designed for blue-light and amber-light vehicle fleets, combining up to 18 functions within a single panel-mounted unit. With optional fitting kits, the 'Sandcastle' can be installed using the existing OEM mounting hole, preventing the need to drill additional holes and maintaining OEM functions.

This variant supports **13 Functions** including **TETRA, 4x LTE, 6x WiFi, 2x GPS**

The Sandcastle portfolio includes variants that are **ESN-ready** and fully compatible with **current Airwave system**, making it ideal for future proofing your fleet for the upcoming transition to LTE.

Also Available in White: Part No. 8000-217



Part No.

SK0200760

SK0200713

Cable Kit Options

Product Kit : Sandcastle 13 in 1 Antenna : White : 4x4 LTE/Cellular 6x6 WiFi 2x GPS 1xTetra; - c/w 5m Low Loss Coax Extension Cables - Terminated

Product Kit : Sandcastle 13 in 1 Antenna : Black : 4x4 LTE/Cellular 6x6 WiFi 2x GPS 1xTetra; - c/w 2m Low Loss Coax Extension Cables - Terminated

Additional options available upon request.

A brand of



www.sure-antennas.com

Technical Specifications


Part No.	8000-317		
Electrical Data	TETRA	2G 3G 4G 5G	WiFi
Frequency Range (MHz)	380 - 430 MHz	698-6000 MHz	2.4 GHz & 5.8GHz
Band	TETRA	4x Wideband LTE 4x4 MiMo	6x Dual Band Wi-Fi 6x6 MiMo
VSWR	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1	<2.1:1 TYPICALLY 1.5:1
Gain	5dBi	Minimum 4dBi	Minimum 4dBi
Isolation	-	<-25dB	<-25dB
Polarisation	Vertical	Vertical	Vertical
Pattern	Omni-directional	Omni-directional	Omni-directional
Impedance	50Ω	50Ω	50Ω
Max Power Input (W)	25W	10W	10W
GPS/GLONASS			
Frequency Range (MHz)	1562-1612		
VSWR	<2:1		
Gain	26dB		
Polarisation	Right Hand Circular		
Operating Voltage	3-5v DC (fed via coax, each port is DC isolated)		
Cable	2x RG316 Terminated to SMA (m)		
Mechanical Data			
Dimensions (mm)	H76xW197xL227 *		
Operating Temp (°C)	-40 / +80°C (-40° / 176°F)		
Material	ABS		
Colour	Black		
Weight (g)	600		
Cable Data			
Cable Type	RG316	RG316	RG316
length (mm)	300	300	300
Diameter	2.8	2.8	2.8
Termination	TNC (f)	SMA (f)	SMA (m) Reverse Polarity
Mounting Data			
Mounting Type	Panel mount with adhesive pad		
Mounting Hole (mm)	19mm		

Subject to change without prior notice. *Excluding optional whip


Supplied Coax Extension Cables

Coax Cables	4x LTE	6x WiFi	1x GPS	1x Tetra	1x GPS
Cable Type	SBC240	SBC240	SBC100	SBC195	SBC100
length	5m or 3m	5m or 3m	5m or 3m	5m or 3m	5m or 3m
Diameter (mm)	6.1	6.1	2.8	4.95	2.8
Min. Bend Radius (mm)	30	30	14	25	14
Operating Temp. °C	-40-80	-40-80	-40-80	-40-80	-40-80
Termination	SMA (m)	SMA Reverse Polarity (m)	SMA (m)	BNC (m)	SMA (m) – Motorola and Sepura adaptors supplied.
Labeling	LTE M & LTE A	WiFi M & WiFi A	GPS	TETRA	GPS TETRA


Cable Diagram

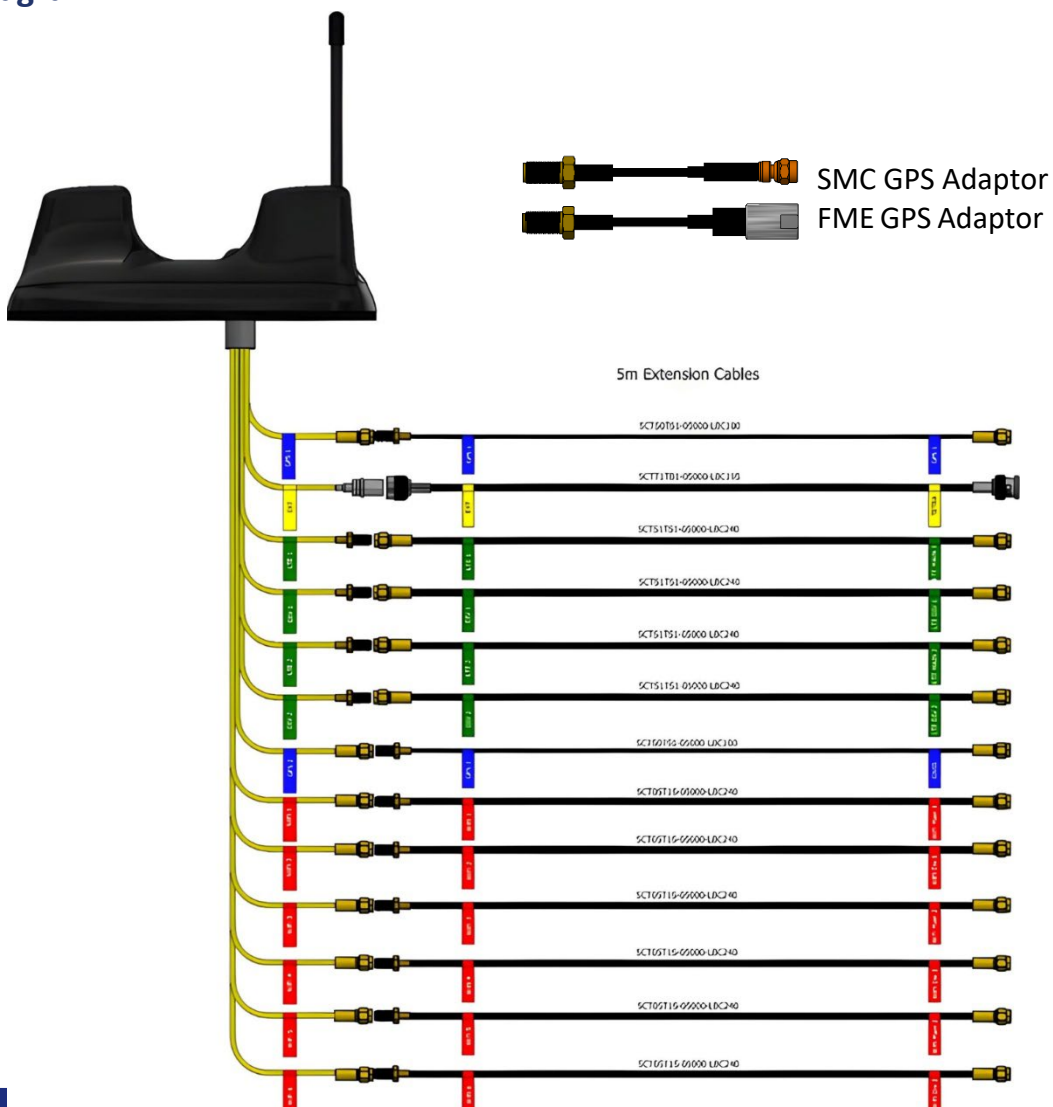

LTE / DIV Ports - Mismatch Efficiency

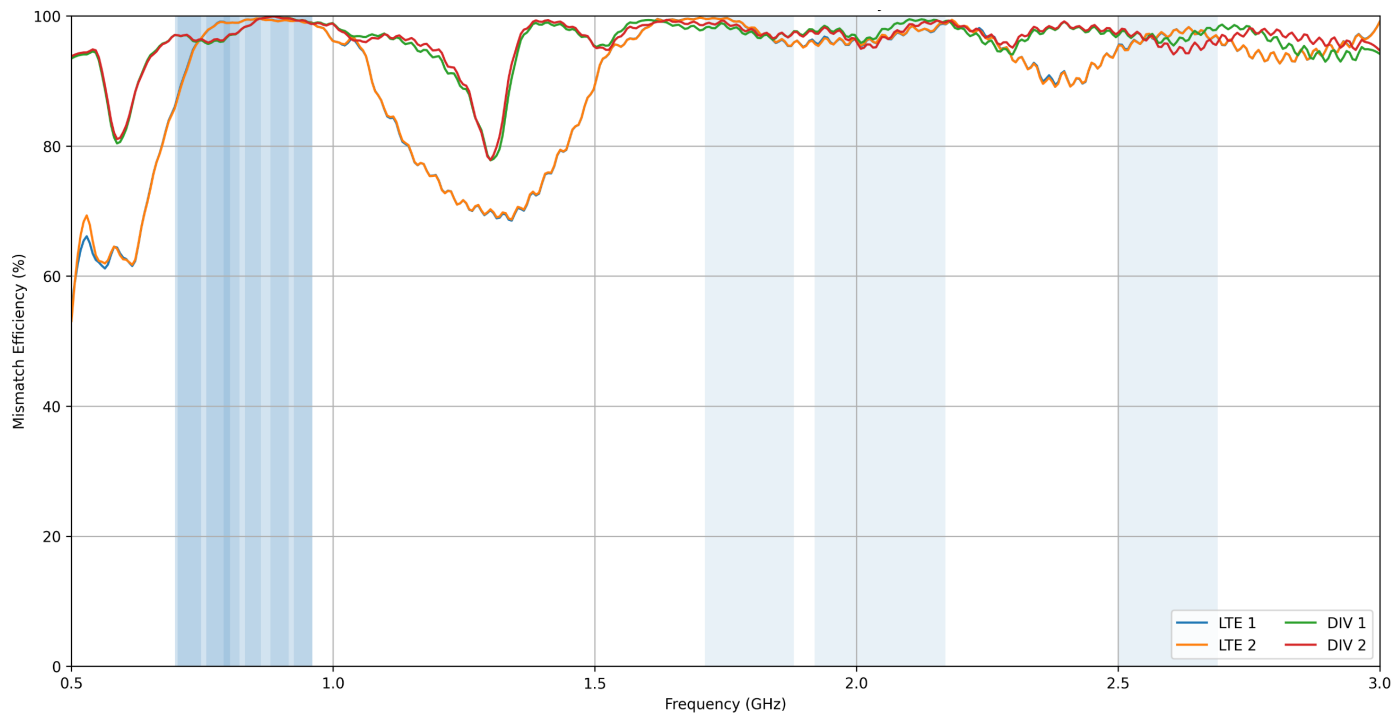


LTE ECC (Cut at 3 GHz)

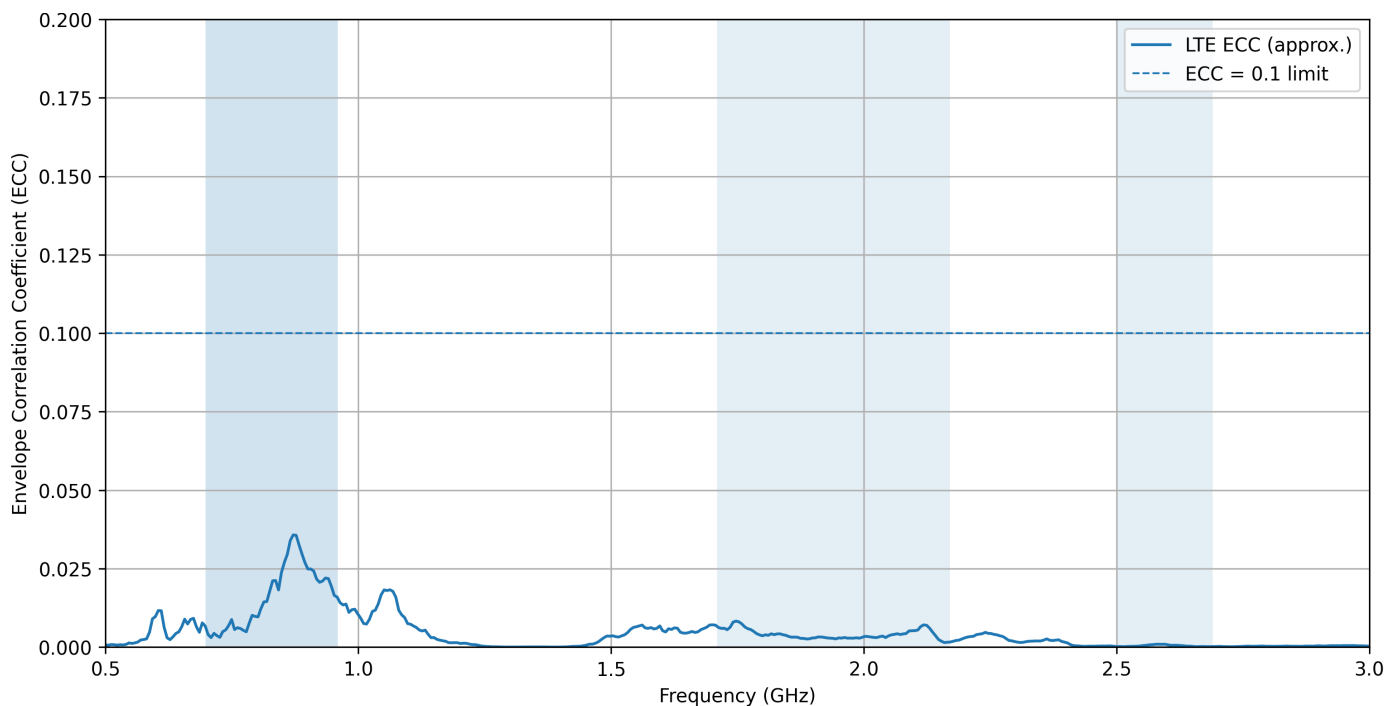


Subject to change without prior notice.

LTE Port Isolation (Cut at 3 GHz)

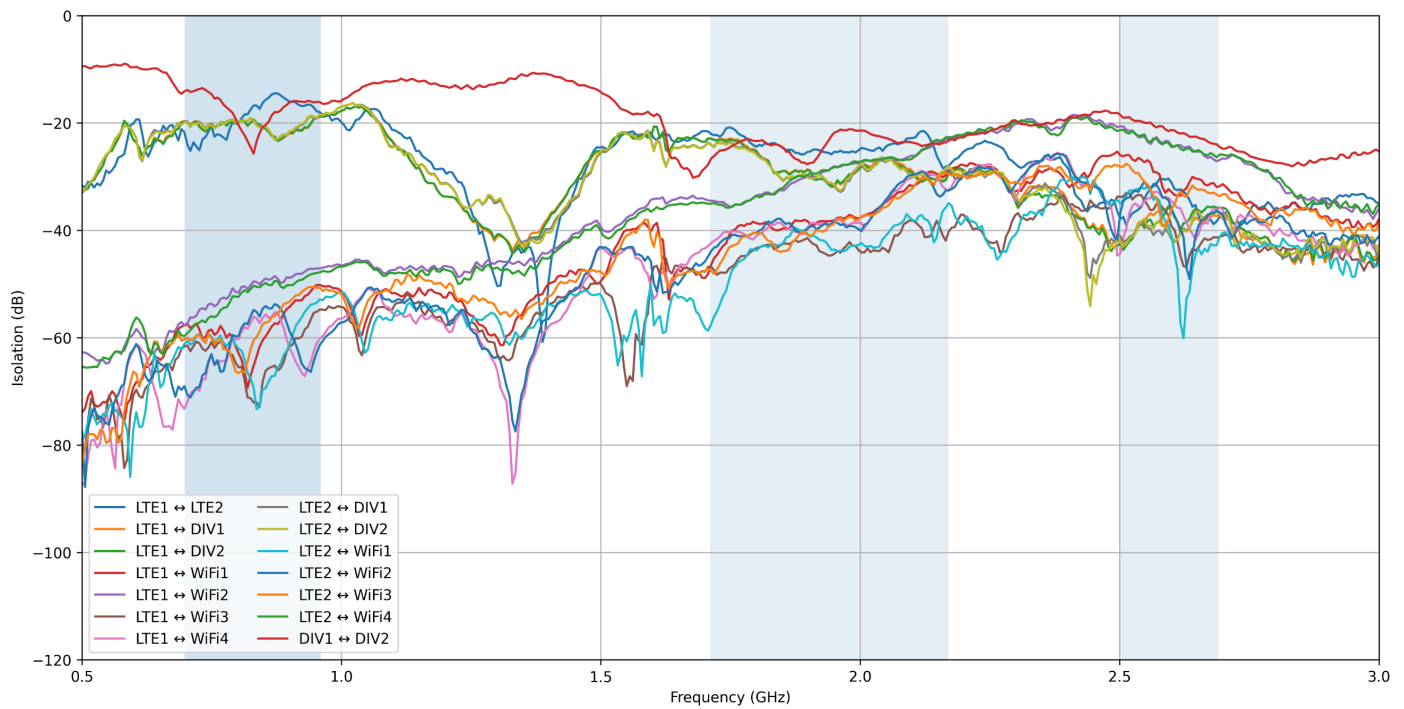


LTE Return Loss

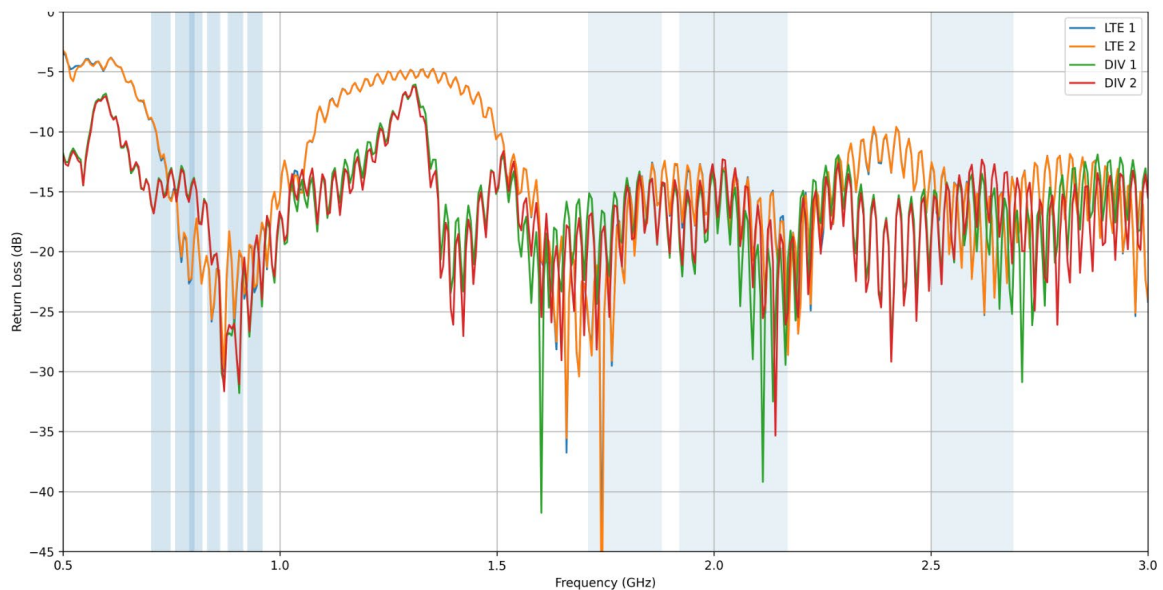


Subject to change without prior notice.

TETRA Port Isolation to All Other Parts (S21)

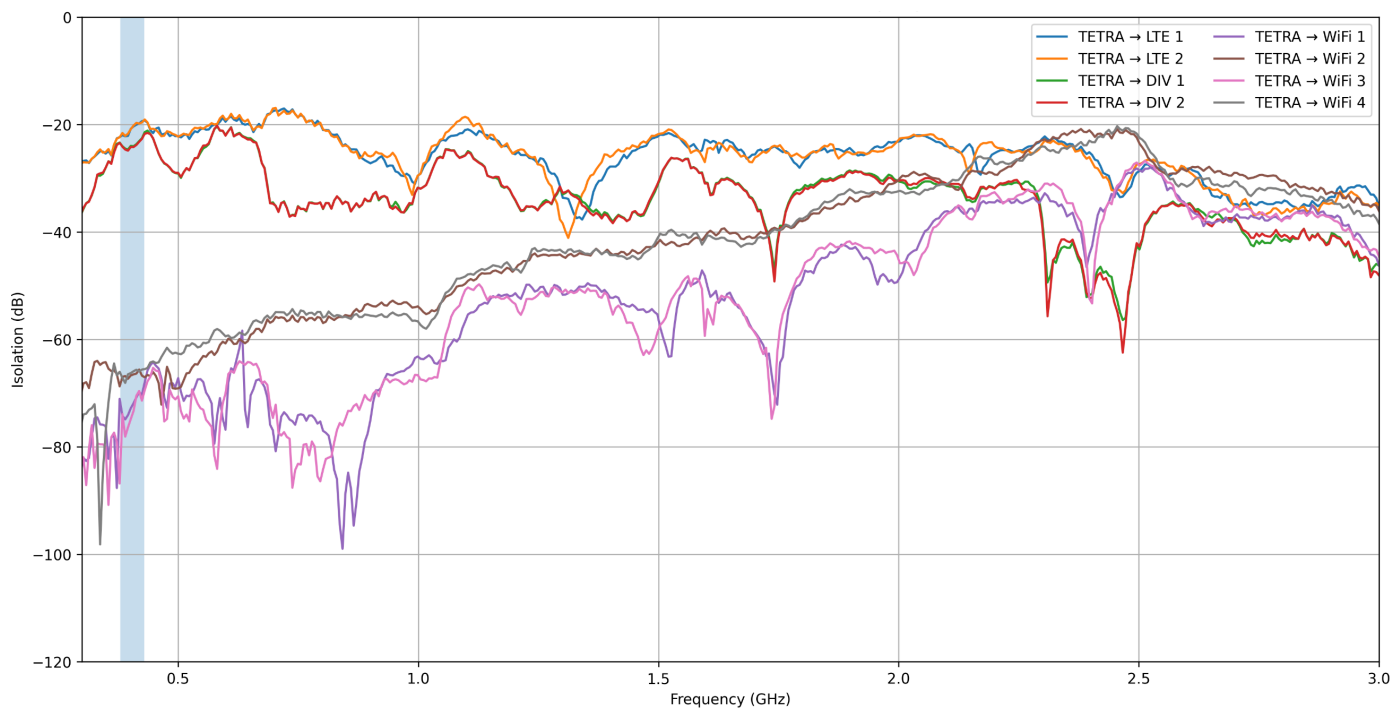


TETRA Port -Mismatch Efficiency (380-430 MHz)

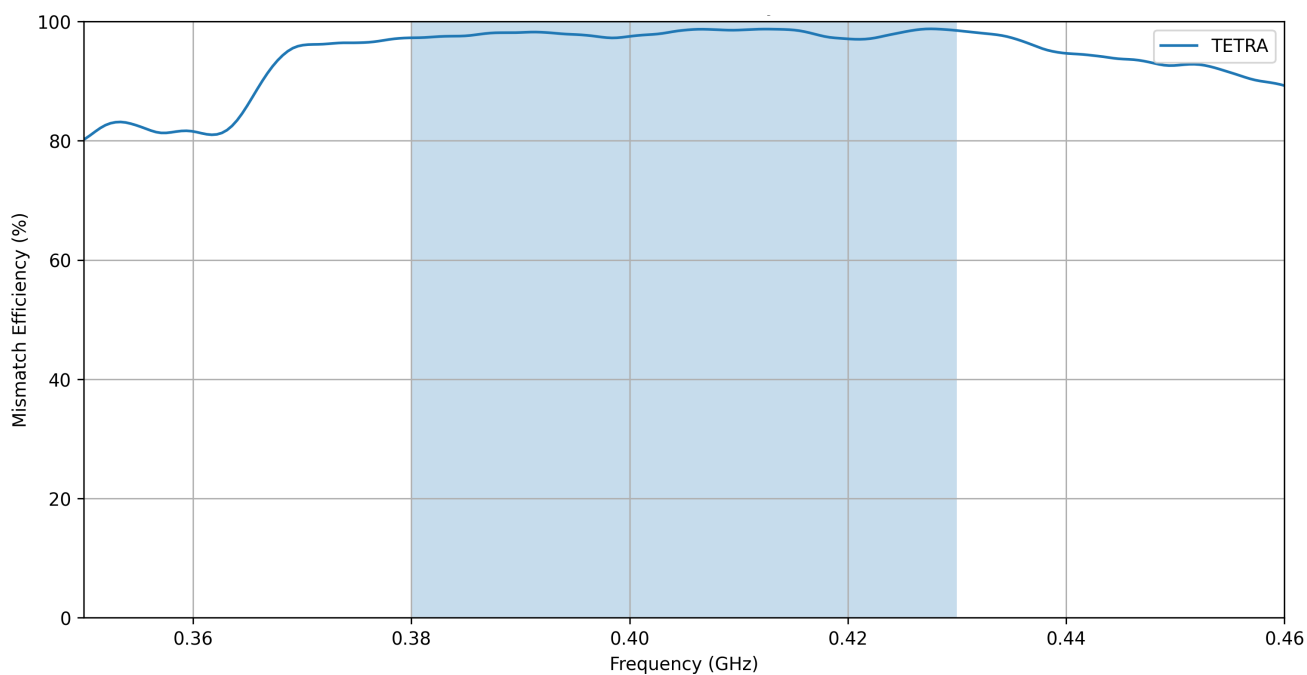


Subject to change without prior notice.

TETRA Antenna – Return Loss (380-430 MHz)

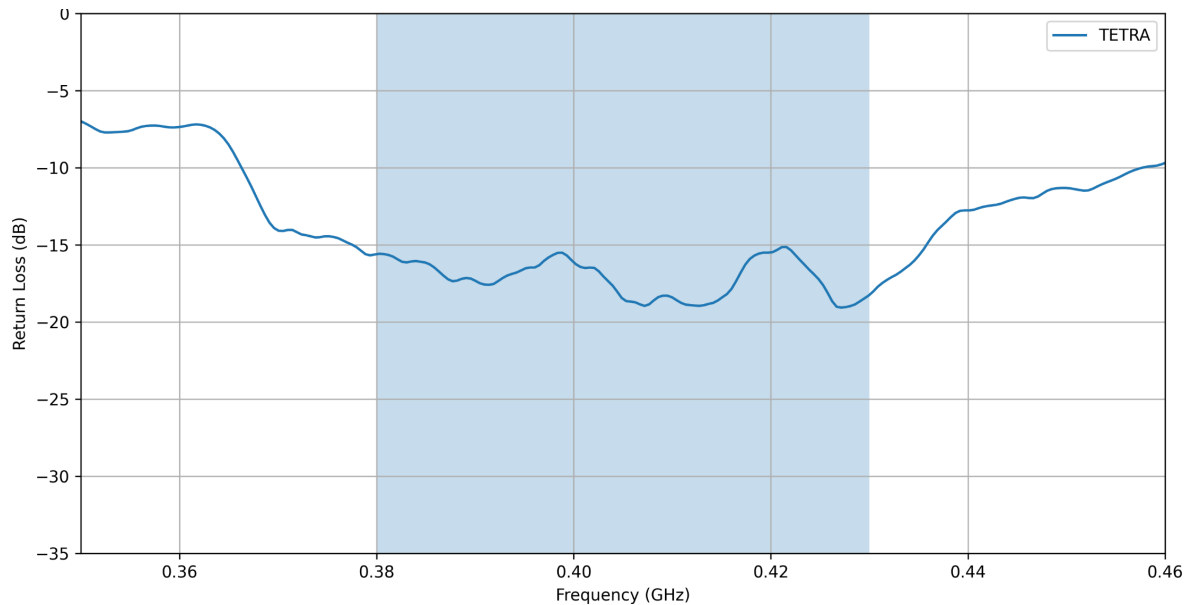


WiFi Port-to-Port Isolation (Updated Measurements)

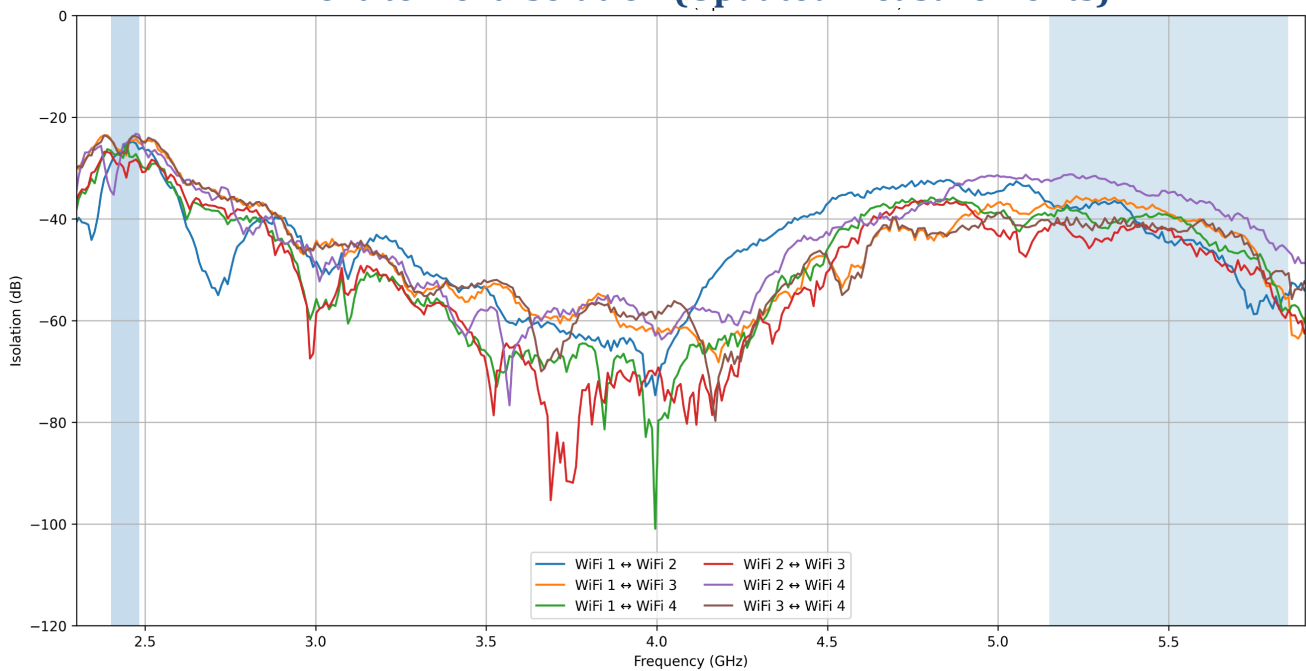


Subject to change without prior notice.

WiFi Ports - Mismatch Efficiency

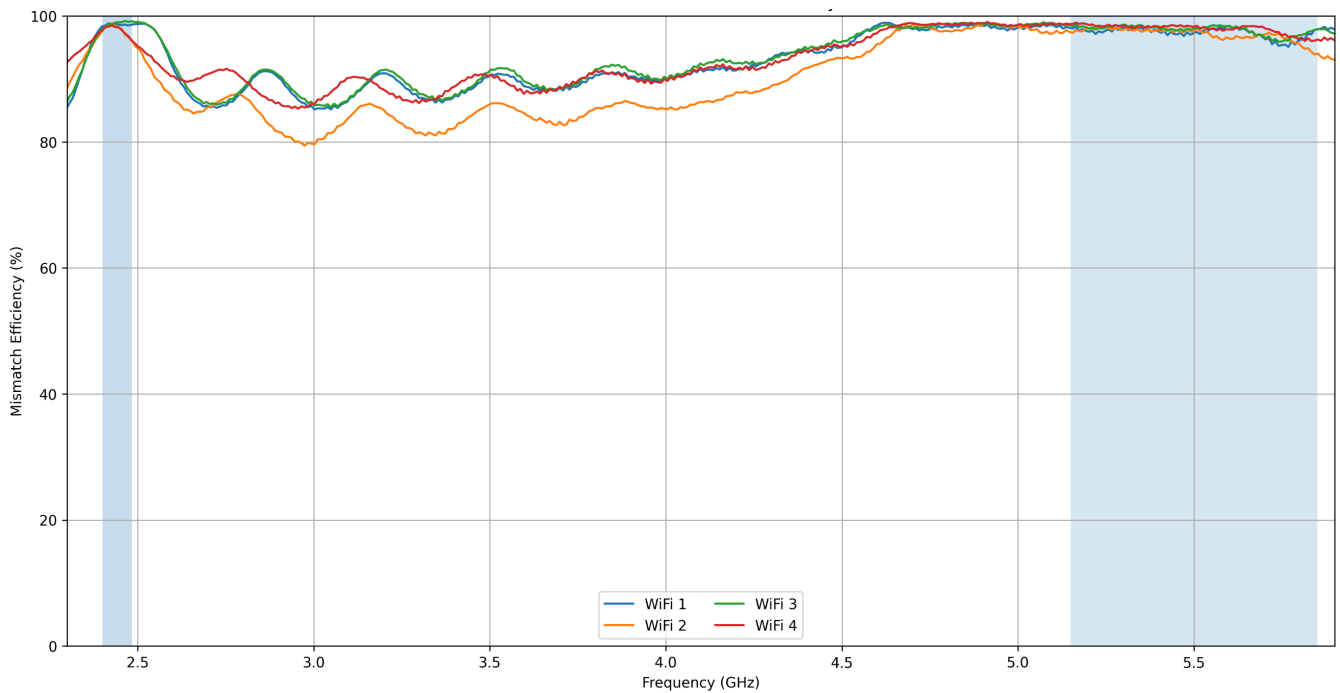

WiFi Antenna - Dual-Band Return Loss

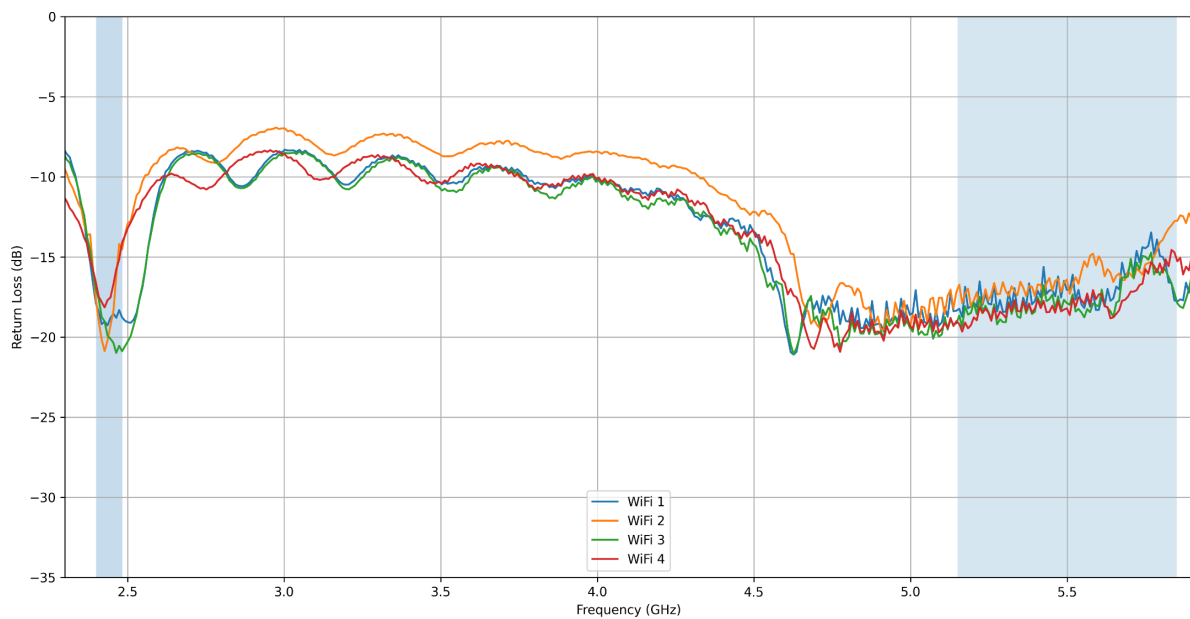


Subject to change without prior notice.


8000-317 'Sandcastle' 13-in-1 Antenna Black incl. - TETRA

3D Radiation Pattern


820Mhz

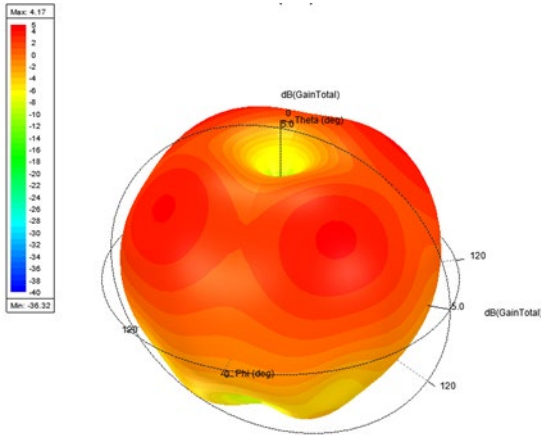


1820Mhz

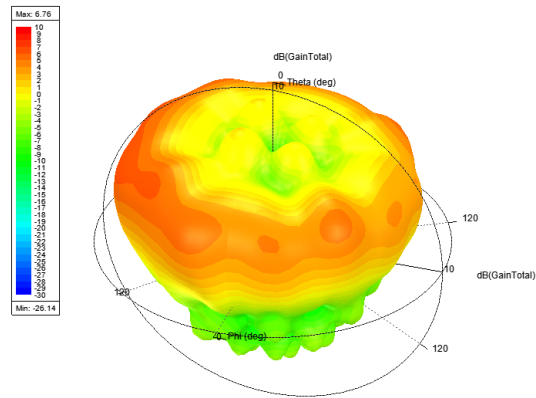


2140Mhz

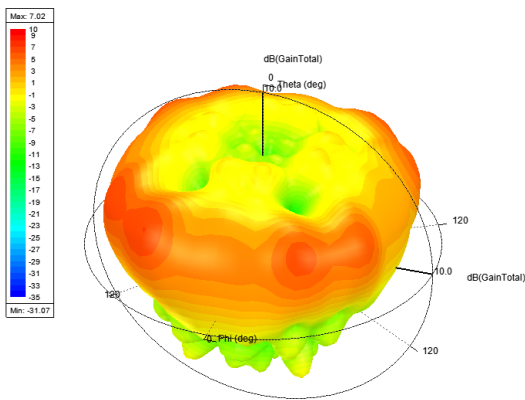

2600Mhz

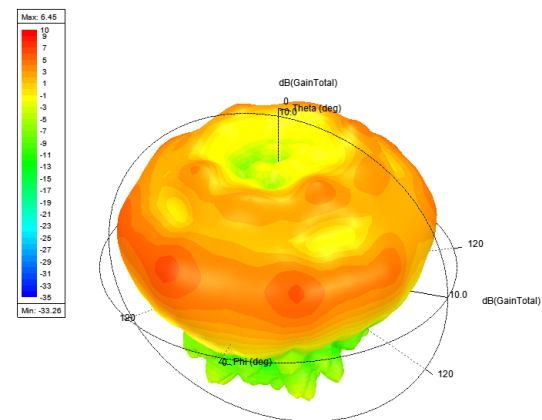

3600Mhz

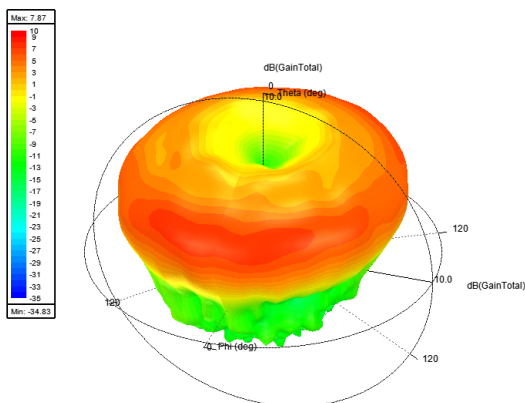

Subject to change without prior notice.

Sure Antennas. 6 Woodway Court, Thursby Rd, Bromborough, Merseyside CH62 3PR, United Kingdom
Schiphol Airport Tetra, Transpolis Park, Siriusdreef 17-27, 2132 WT Hoofddorp, Netherlands

T. +44 (0)151 363 7377 | E. sales@sure-antennas.com

A brand of



www.sure-antennas.com